


Signal Multiplier MCR-FL-C-UI-2UI-DCI

1. Description

- 4-way isolation
- Configurable inputs and outputs
- Signal conversion and amplification
- Adjustable signal combinations
- 17.5 mm ME housing

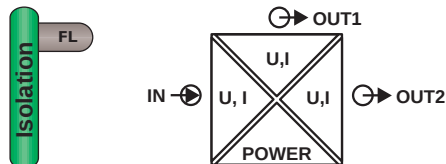


The MCR-FL-C-UI-2UI-DCI signal multiplier is used to multiply and electrically isolate analog signals.

The module inputs, outputs, and the power supply are electrically isolated from one another (4-way isolation). In this way, the modules can be used for electrical isolation, signal conversion, and amplification both locally and close to the control system. The auxiliary voltage required is indicated by a green power LED.


DIP switches can be used to switch between a signal selected within the limits of the order key or for the fixed signal conversions provided in the configuration table.

If no entry is made in the specified order key, the devices are supplied with the default configuration (input signal 0...20 mA, output signals 0...20 mA/0...10 V).


Adjustment following configuration is not necessary, as each transmission variant is calibrated and stored in the device.

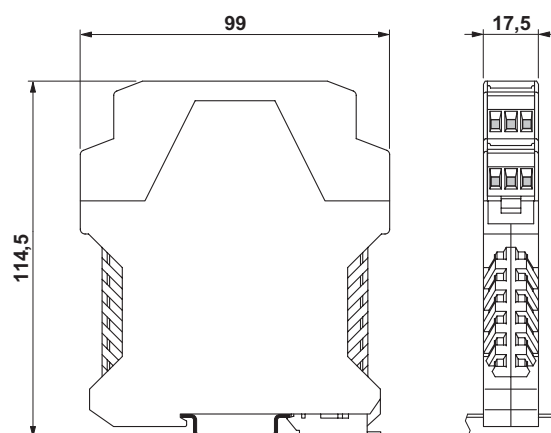

2. Technical Data

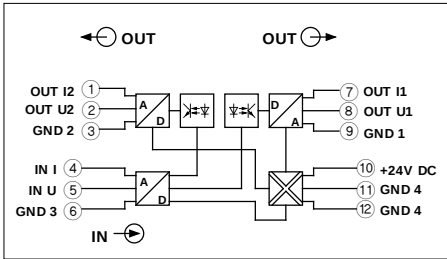

MCR-FL-C-UI-2UI-DCI
with configurable input and output

 M 3	 8 mm		
	Solid	Stranded	
	[mm ²]		AWG
Connection data	0.2 - 2.5	0.2 - 2.5	25 - 14
Description			
MCR signal multiplier, for doubling and electrical isolation of analog signals		Preconfigured Not configured	
Technical Data			
Input			
Input signal range			
Measuring range span			
Maximum input signal			
Input resistance			
Output			
Output signal per channel			
Maximum output signal per channel			
Load per channel			
General Data			
Supply voltage			
Current consumption (without load)			
Transmission error			
Temperature coefficient			
Limit frequency (3 dB)			
Step response (10 - 90%)			
Test voltage			
Protective circuit			
Ambient operating temperature range			
Degree of protection			
Connection method			
Mounting position/mounting			
Electromagnetic compatibility:			
• Noise emission			
• Noise immunity			



Type	Order No.	Pcs. Pkt.
MCR-FL-C-UI-2UI-DCI	28 14 85 4	1
MCR-FL-C-UI-2UI-DCI-NC	28 14 86 7	1
0...24 mA/0...12 V, freely selectable in increments of 0.1 (mA/V) 8 mA/4 V, minimum 50 mA or 30 V 50 Ω at I input/200 kΩ at U input		
See order key/configuration table 35 mA or 15 V ≤ 600 Ω at I output/≥ 10 kΩ at U output		
20...30 V DC < 25 mA < 0.15% of the final value; 0.05% of the final value, typical < 0.015%/K, 0.0075%/K, typical 30 Hz 12 ms 1.5 kV AC, 50 Hz, 1 minute Transient protection -20°C to +55°C IP20 Plug-in COMBICON screw terminal block Any CE Conformance with EMC Directive 89/336/EEC EN 50 081-2 EN 50 082-2		



Conformance With EMC Directive 89/336/EEC and the Low Voltage Directive 73/23/EEC

EMC (Electromagnetic Compatibility)

Noise Immunity According to EN 50082-2

• Electrostatic discharge (ESD)

• Electromagnetic HF field
Amplitude modulation
Pulse modulation

• Fast transients (burst)

• Surge current loads (surge)

• Conducted interference

Noise Emission According to EN 50081-2

EN 61000-4-2

8 kV air discharge ²⁾

EN 61000-4-3

10 V/m ¹⁾

10 V/m ¹⁾

EN 61000-4-4

Input/output/supply

2 kV/5 kHz ²⁾

EN 61000-4-5

Input/output: 2 kV/42 Ω ²⁾

Supply: 0.5 kV/2 Ω/12 Ω ²⁾

EN 61000-4-6

Input/output/supply

10 V ¹⁾

EN 55011

Class A

EN 61000 corresponds to IEC 1000/

EN 55011 corresponds to CISPR11

¹⁾ Criterion A: Normal operating characteristics within the specified limits.

²⁾ Criterion B: Temporary adverse effects on the operating characteristics which the device corrects automatically.

Class A: Industrial application, without special installation measures.

Approval

	PROCESS CONTROL EQUIPMENT FOR HAZARDOUS LOCATIONS 31ZN
LISTED	Cl. I, Zn. 2, AEx nC IIC T6 / Ex nC IIC T6 Cl. I Div. 2, Groups A, B, C and D A) This equipment is suitable for use in Class I, Division 2, Groups A, B, C and D or non-hazardous locations only. B) Warning - explosion hazard - substitution of components may impair suitability for Class 1, Division 2. C) Warning - explosion hazard - do not disconnect equipment unless power has been switched off or the area is known to be non-hazardous.

MCR-FL-C-UI-2UI-DCI – Signal Multiplier

① Upper housing part, can be removed to set DIP switches

② Plug-in screw terminal blocks

③ Metal lock for fastening on the DIN rail

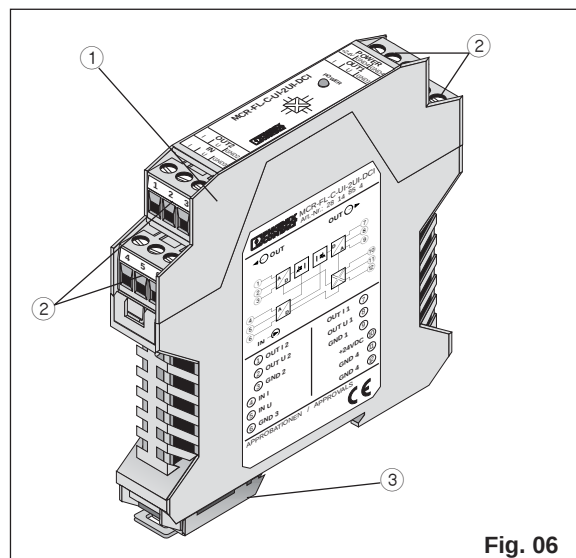


Fig. 06

3. Configuration

3.1. Opening the Device (Fig. 07)

The fastenings on both sides of the upper housing part can be released using a screwdriver ①. The upper housing part and the electronics can now be pulled out about 3 cm ②.

**Ensure you take sufficient measures against electrostatic discharge**

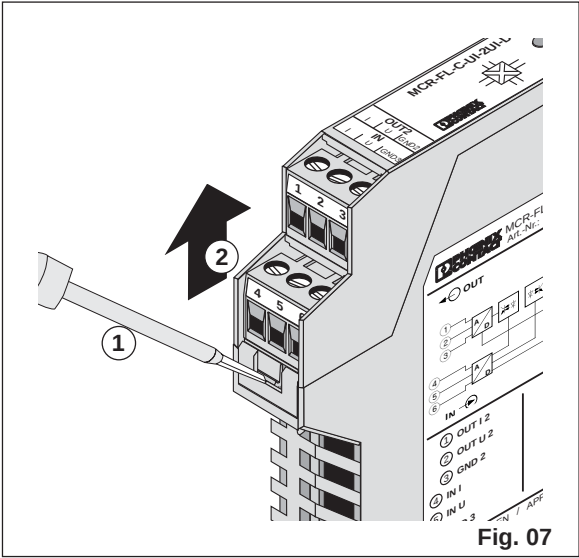


Fig. 07

3.2. Setting (Fig. 08)

Changes to the ordered connection method settings are made via DIP switches S1 to S10.

In addition to the preconfigured signal, which is preset by the order key, the remaining 9 DIP switches and their signal behavior can be enabled using DIP switch 10.

Configuration	S10
Signal range specification via DIP switches	OFF
Signal ranges preset by order key	ON


Input (IN)	S1	S2	S3
0...20 mA	OFF	OFF	OFF
0...10 mA	OFF	OFF	ON
4...20 mA	OFF	ON	OFF
2...10 mA	OFF	ON	ON
0...10 V	ON	OFF	OFF
1...5 V	ON	OFF	ON
0...5 V	ON	ON	OFF
2...10 V	ON	ON	ON

The current and voltage channel can be used in parallel at each output so that up to four signal outputs with full load capability are provided.

Please note: Where possible, output 1 should be used as a current output.

Output: Current/Voltage Signal	Output 1 (OUT 1)			Output 2 (OUT 2)		
	S4	S5	S6	S7	S8	S9
0...20 mA / 0...10 V	OFF	OFF	OFF	OFF	OFF	OFF
0...20 mA / 1...5 V	OFF	OFF	ON	OFF	OFF	ON
0...20 mA / 0...5 V	OFF	ON	OFF	OFF	ON	OFF
0...10 mA / 0...5 V	OFF	ON	ON	OFF	ON	ON
4...20 mA / 0...10 V	ON	OFF	OFF	ON	OFF	OFF
4...20 mA / 1...5 V	ON	OFF	ON	ON	OFF	ON
4...20 mA / 0...5 V	ON	ON	OFF	ON	ON	OFF
4...20 mA / 2...10 V	ON	ON	ON	ON	ON	ON

If the value is outside the measuring range, a linear transmission response is triggered.



DIP	DIP Switch Function
10	Signal range specification according to the order key or DIP switches
9	Output 2: Setting the output signal ranges
8	
7	
6	Output 1: Setting the output signal ranges
5	
4	
3	Setting the input signal range
2	
1	

Fig. 08

4. Application Example (Fig. 09)

Level measurement with ultrasound
and subsequent signal multiplication

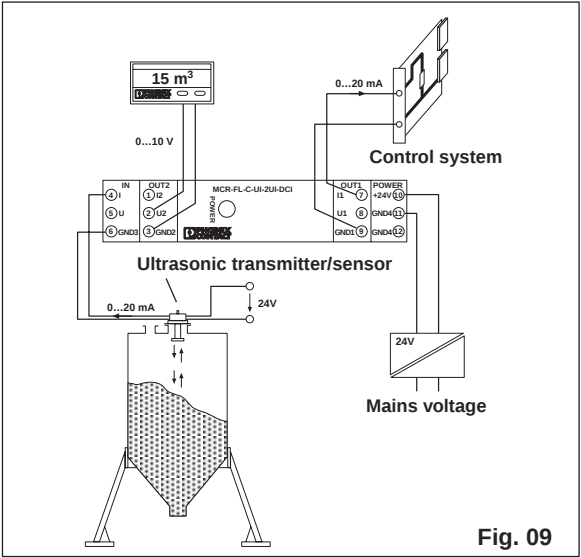


Fig. 09

5. Order Key

MCR-FL-C-UI-2UI-DCI

The standard configuration will be supplied if customer order details are incorrect or not provided (provided in the order key as an example).

Order No.	Input Signal	Input Signal (Standard and Special Signals)		Output Signal (Standard Signals)	
		Start Value	Final Value	Output 1	Output 2
28 14 85 4	I	0.0	20.0	OUT01	OUT01
Standard configuration	I ≙ Current U ≙ Voltage	I ≙ 0.0 mA I: Freely selectable between U: Freely selectable between	I ≙ 20.0 mA I: Freely selectable between U: Freely selectable between	OUT01 ≙ 0...20 mA OUT02 ≙ 4...20 mA OUT03 ≙ 0...10 V OUT04 ≙ 2...10 V OUT05 ≙ 0...5 V OUT06 ≙ 1...5 V OUT16 ≙ 0...10 mA	OUT01 ≙ 0...20 mA OUT02 ≙ 4...20 mA OUT03 ≙ 0...10 V OUT04 ≙ 2...10 V OUT05 ≙ 0...5 V OUT06 ≙ 1...5 V OUT16 ≙ 0...10 mA

• Minimum measuring range span 8.0 mA/4.0 V ²⁾
• Increment 0.1 mA/0.1 V

²⁾ Order examples:

Order No.	Input Signal	Input Signal (Standard and Special Signals)		Output Signal	
		Start Value	Final Value	Output 1	Output 2
28 14 85 4	I	5.3	13.3	OUT01	OUT01
	I ≙ Current	I ≙ 5.3 mA	I ≙ 13.3 mA		

Measuring range span 8.0 mA, i.e., can be ordered.

28 14 85 4	U	7.8	11.8	OUT01	OUT03
	U ≙ Voltage	I ≙ 7.8 V	I ≙ 11.8 V		

Measuring range span 4.0 V, i.e., can be ordered.