




FS2-65

Fibre Amplifier, Cable Type, NPN



! This model has been discontinued.

Contact Us: +44(0)1908-696-900 +353-1-800-813-031

Compliance with the certification standard is ensured as of the time of shipment from our company.

Recommended Replaceable Products: [Digital Fibre optic Sensor - FS-N40 series](#)

Specifications





Model	FS2-65	
Type	Trimmer : High-speed response	
Light source	Red LED	
Sensitivity adjustment	8-turn trimmer	
Response time	50 μ s	
Operation mode	LIGHT-ON/DARK-ON (switch-selectable)	
Indicator lamp	Output: Red LED Stable operation: Green LED	
Timer function	ON-delay: 40 ms/OFF-delay: 40 ms/Timer OFF (switch-selectable)	
External calibration input signal	—	
Buzzer mode	Buzzer ON when control output turns ON/Buzzer ON when alarm output turns ON/ Buzzer OFF (switch-selectable)	
Output	NPN output	
Control output	NPN open-collector 100 mA max. (40 V max.), Residual voltage 1 V max.	
Stability output	NPN open-collector 50 mA max. (40 V max.), Residual voltage 1 V max.	
Protection circuit	Reversed polarity protection, Overcurrent protection, Surge absorber	
Rating	Power voltage	12 to 24 VDC \pm 10 %, Ripple (P-P) 10 % or less
	Current consumption	35 mA or less
Environmental resistance	Ambient light	Incandescent lamp: 10,000 lux max., Sunlight: 20,000 lux max.
	Ambient temperature	-10 to +55 °C (No freezing)
	Relative humidity	35 to 85 % RH (No condensation)
	Vibration resistance	10 to 55 Hz, Double amplitude 1.5 mm, 2 hours in each of the X, Y, and Z directions
	Shock resistance	500 m/s ² , 3 times in each of the X, Y, and Z directions
Material	Polycarbonate	
Weight	Approx. 61 g	

Dimensions

* Download CAD file or product manual for larger image/text and more detail.

FS2-65


When mounting bracket is attached

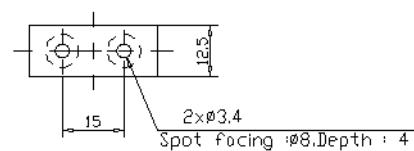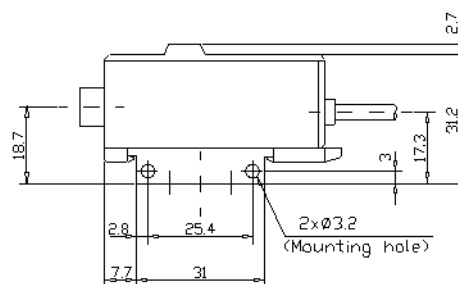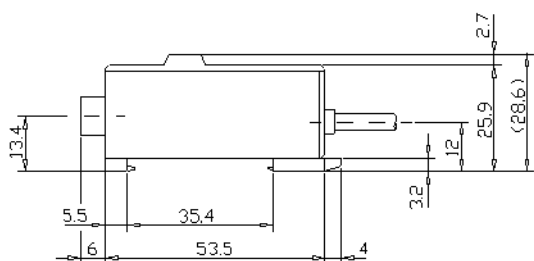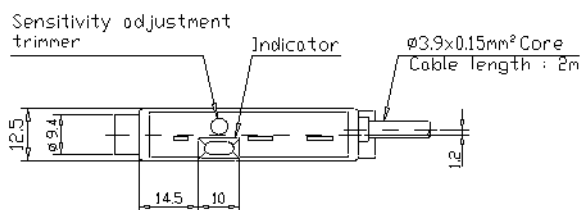

I/O Circuit Connection diagram

* Download CAD file or product manual for larger image/text and more detail.

When driving the load directly
(NPN output)

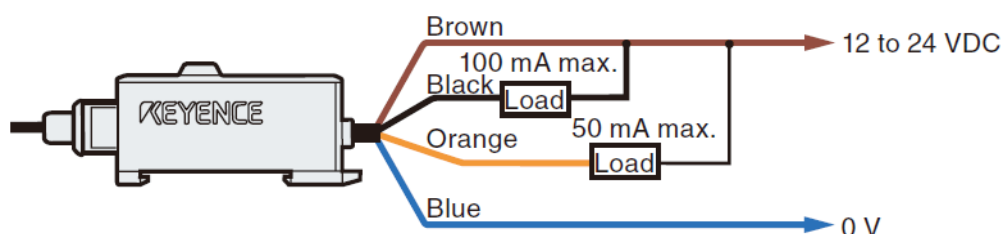

When connecting the fibre sensor to voltage input/output
equipment (Low level when the output is on)
(NPN output)

