

Qty. Description

1 **JP 6 B-A-CVBP**



Product No.: [46631011](#)

Horizontal self-priming jet pump.

Self-priming single-stage centrifugal jet pump with axial suction port and radial discharge port close-coupled with a three-phase motor. Pump and motor are mounted on a common baseplate.

The pump has a mechanical carbon/ceramics shaft seal.

Liquid:

Pumped liquid: Water
 Liquid temperature range: 1 .. 40 °C
 Selected liquid temperature: 20 °C
 Density: 998.2 kg/m³

Technical:

Primary shaft seal: CVBP
 Approvals: CE,IE2
 Curve tolerance: ISO9906:2012 3B

Materials:

Pump housing: Stainless steel
 EN 1.4301
 AISI 304
 Impeller: Stainless steel
 DIN W.-Nr. 1.4301
 AISI 304

Installation:

Range of ambient temperature: 0 .. 40 °C
 Maximum operating pressure: 6 bar
 Pump inlet: G1
 Pump outlet: G1

Electrical data:

Power input - P1: 1325 W
 Mains frequency: 50 Hz
 Rated voltage: 3 x 220-240 D/380-415 Y V
 Rated current: 4.1/2.35 A
 Enclosure class (IEC 34-5): IP44
 Insulation class (IEC 85): F
 Type of cable plug: NONE

Others:

Net weight: 12 kg
 Gross weight: 13 kg



Company name:

Created by:


Phone:

Date:

18/12/2024

Qty.	Description
1	Shipping volume: 0.026 m ³

Description	Value
General information:	
Product name:	JP 6 B-A-CVBP
Product No:	46631011
EAN number:	5708601050510
Price:	
Technical:	
Max. head:	50 m
Primary shaft seal:	CVBP
Approvals:	CE,IE2
Curve tolerance:	ISO9906:2012 3B
Pump version:	B
Model:	D
Ejector valve:	yes
Materials:	
Pump housing:	Stainless steel
Pump housing:	EN 1.4301
Pump housing:	AISI 304
Impeller:	Stainless steel
Impeller:	DIN W.-Nr. 1.4301
Impeller:	AISI 304
Material code:	A
Installation:	
Range of ambient temperature:	0 .. 40 °C
Maximum operating pressure:	6 bar
Pump inlet:	G1
Pump outlet:	G1
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	1 .. 40 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Power input - P1:	1325 W
Mains frequency:	50 Hz
Rated voltage:	3 x 220-240 D/380-415 Y V
Rated current:	4.1/2.35 A
Enclosure class (IEC 34-5):	IP44
Insulation class (IEC 85):	F
Type of cable plug:	NONE
Cable:	N
Controls:	
Presscontrol:	without press control
Switch:	on/off switch not included
Others:	
Net weight:	12 kg
Gross weight:	13 kg
Shipping volume:	0.026 m ³

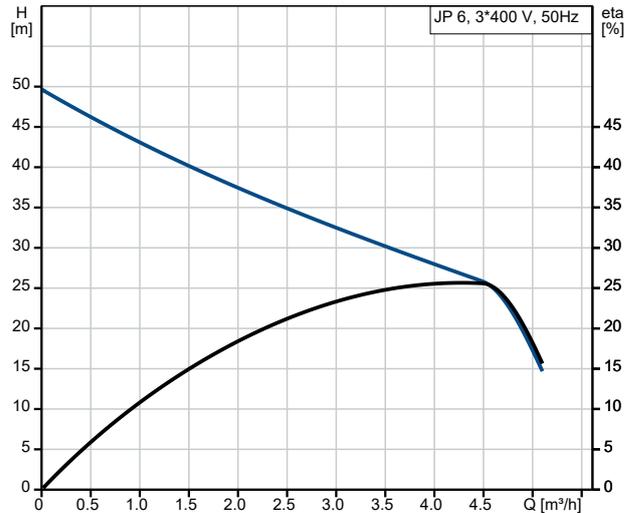

Pumped liquid = Water
 Liquid temperature during operation = 20 °C
 Density = 998.2 kg/m³

