

Characteristics

The direct operated control valve D1FP of the nominal size NG06 (CETOP 03) shows extremely high dynamics combined with maximum flow. It is the preferred choice for highest accuracy in positioning of hydraulic axis and controlling of pressure and velocity.






Driven by the patented VCD® actuator the D1FP reaches the frequency response of real servovalves. Compared with solenoid driven valves the D1FP can also be used in applications with pressure drops up to 350 bar across the valve. Because of the high flow capability the D1FP can be a substitute for NG10 valves in some cases.

At power-down the spool moves in a defined position. All common input signals are available.


3

Technical features

- Real servovalve dynamics (-3 dB / 350 Hz at ±5 % input signal)
- No flow limit up to 350 bar pressure drop through the valve
- Max. tank pressure 350 bar (with external drain port y)
- High flow
- Defined spool positioning at power-down - optional P-A/B-T or P-B/A-T or center position (for overlapped spools)
- Onboard electronics

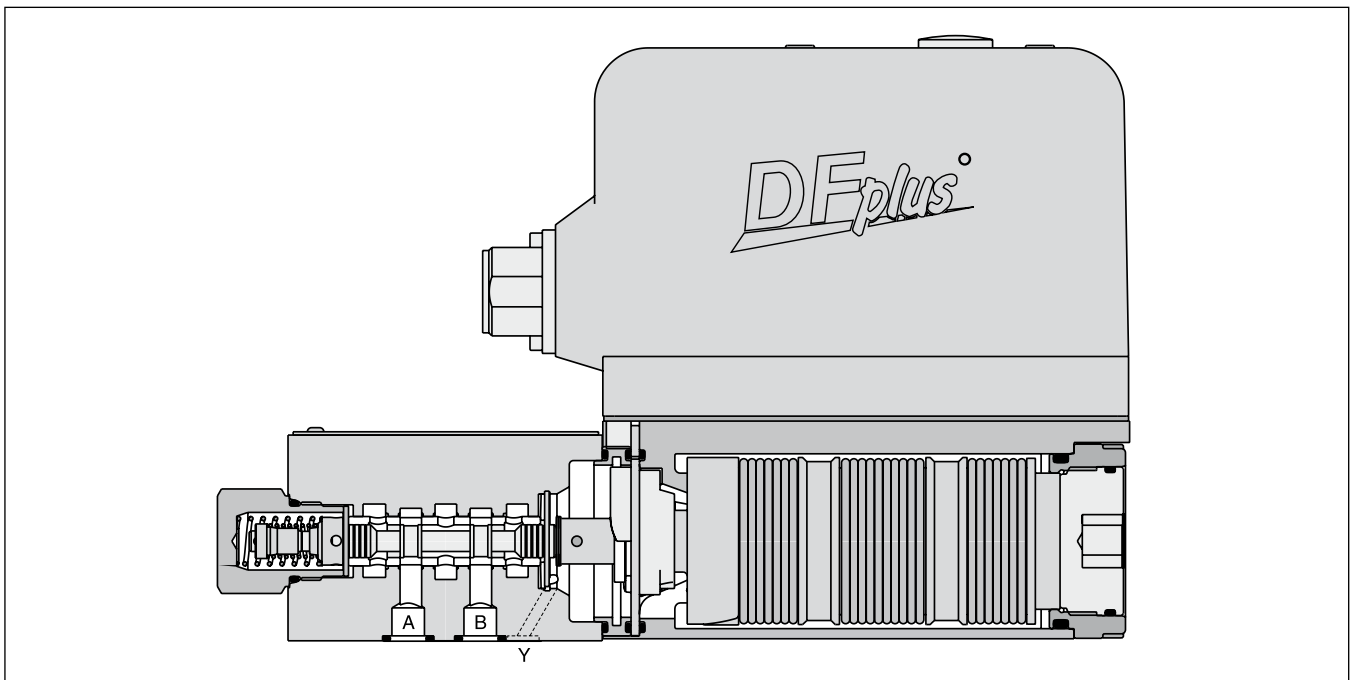

Ordering Code

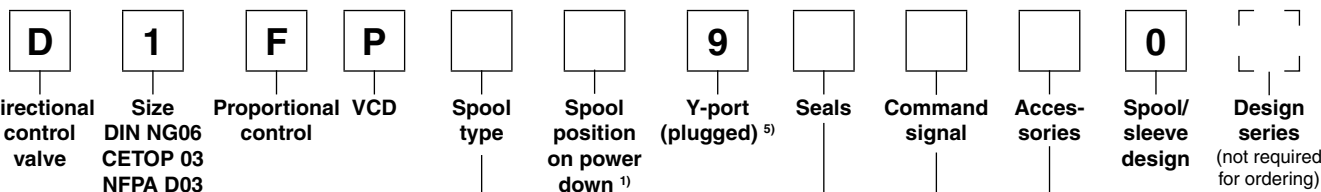

Code	Spool type	Flow [l/min] at Δp 35 bar per metering edge
Zerolap		
E50M		40
E50H		25
E50G		16
E50F		12
E50C		6
E50B		3
Underlap approx. -0.5 %		
E55M		40
E55H		25
E55G		16
E55F		12
E55C		6
E55B		3
Overlap 25 %		
E01M		40
E01H		25
E01G		16
E01F		12
E01C		6
E01B		3
B31M		40 / 20
B31H		25 / 12.5
B31G		16 / 8
B31F		12 / 6
B31C		6 / 3
Overlap 25 %		
E02M		40
E02H		25
E02G		16
E02F		12
E02C		6
E02B		3
B32M		40 / 20
B32H		25 / 12.5
B32G		16 / 8
B32F		12 / 6
B32C		6 / 3

Code	Connection type
0	6 + PE acc. EN175201-804
5	11 + PE acc. EN175201-804
7	6 + PE + Enable

Code	Signal	Function
B	+/- 10 V	0...+10 V -> P-A
E	+/- 20 mA	0...+20 mA -> P-A
S	4...20 mA	12...20 mA -> P-A

Code	Seals
N	NBR
V	FPM
H	for HFC fluid

Code	Spool position at power down
A ²⁾	
B ²⁾	
C ³⁾	
H ⁴⁾	
J ⁴⁾	

Short delivery time for all variations

Note:

Adapter plate for ISO 4401 to ISO 10372 size 04, Ordering code HAP04WV06-1661

Please order connector separately, see chapter 3 accessories.

Parametrizing cable OBE -> RS232, item no. 40982923

- ¹⁾ On power down the spool moves in a defined position. This cannot be guaranteed in case of single flow path on the control edge A – T resp. B – T with pressure drops above 120 bar or contamination in the hydraulic fluid.
- ²⁾ Approx. 10 % opening, only zero lapped spools and underlap spools.
- ³⁾ Only for overlapped spools.
- ⁴⁾ Not for flow code M (40 l/min).
- ⁵⁾ Needs to be removed at tank pressure >35 bar.



3

General		
Design		Direct operated proportional DC valve
Actuation		VCD® actuator
Size		NG06 / CETOP 03 / NFPA D03
Mounting interface		DIN 24340 / ISO 4401 / CETOP RP121 / NFPA
Mounting position		unrestricted
Ambient temperature	[°C]	-20...+50
MTTF _D value ¹⁾	[years]	150
Weight	[kg]	5.0
Vibration resistance	[g]	10 Sinus 5...2000 Hz acc. IEC 68-2-6 30 Random noise 20...2000 Hz acc. IEC 68-2-36 15 Shock acc. IEC 68-2-27
Hydraulic		
Max. operating pressure	[bar]	Ports P, A, B 350, port T 35 for internal drain, 350 for external drain, port Y 35 ²⁾
Fluid		Hydraulic oil according to DIN 51524 ... 535, other on request
Fluid temperature	[°C]	-20...+60 (NBR: -25...+60)
Viscosity permitted	[cSt]/mm ² /s	20...400
Viscosity recommended	[cSt]/mm ² /s	30...80
Filtration		ISO 4406 (1999); 18/16/13
Nominal flow at Δp=35 bar per control edge ³⁾	[l/min]	3 / 6 / 12 / 16 / 25 / 40
Flow maximum	[l/min]	90 (at Δp=350 bar over two control edges)
Leakage at 100 bar	[ml/min]	<400 (zerolap spool); <50 (overlap spool)
Static / Dynamic		
Step response at 100 % step ⁴⁾	[ms]	<3.5
Frequency response (±5 % signal) ⁴⁾	[Hz]	350 (amplitude ratio -3 dB), 350 (phase lag -90°)
Hysteresis	[%]	<0.05
Sensitivity	[%]	<0.03
Temperature drift	[%/K]	<0.025
Electrical characteristics		
Duty ratio	[%]	100
Protection class		IP65 in accordance with EN 60529 (with correctly mounted plug-in connector)
Supply voltage/ripple	[V]	DC 22 ... 30, electric shut-off at < 19, ripple < 5 % eff., surge free
Current consumption max.	[A]	3.5
Pre-fusing	[A]	4.0 medium lag
Input signal		
Voltage	[V]	10...0...-10, ripple <0.01 % eff., surge free, 0...+10 V P->A
Impedance	[kOhm]	100
Current	[mA]	20...0...-20, ripple <0.01 % eff., surge free, 0...+20 mA P->A
Impedance	[Ohm]	250
Current	[mA]	4...12...20, ripple <0.01 % eff., surge free, 12...20 mA P->A <3.6 mA = disable, >3.8 mA = according to NAMUR NE43
Impedance	[Ohm]	250
Differential input max.		
Code 0	[V]	30 for terminal D and E against PE (terminal G)
Code 5	[V]	30 for terminal 4 and 5 against PE (terminal ½)
Code 7	[V]	30 for terminal D and E against PE (terminal G)
Enable signal (only code 5/7)	[V]	5...30, Ri = 9 kOhm
Diagnostic signal	[V]	+10...0...-10 / +12.5 error detection, rated max. 5 mA
EMC		EN 61000-6-2, EN 61000-6-4
Electrical connection	Code 0/7 Code 5	6 + PE acc. EN 175201-804 11 + PE acc. EN 175201-804
Wiring min.	Code 0/7 Code 5	7x1.0 (AWG 16) overall braid shield 8x1.0 (AWG 16) overall braid shield
Wiring length max.	[m]	50

¹⁾ If valves with onboard electronics are used in safety-related parts of control systems, in case the safety function is requested, the valve electronics voltage supply is to be switched off by a suitable switching element with sufficient reliability.

²⁾ For applications with p_r>35 bar (max. 350 bar) the Y-port has to be connected and the plug in the Y-port has to be removed.


³⁾ Flow rate for different Δp per control edge: $Q_x = Q_{Nom.} \cdot \sqrt{\frac{\Delta p_x}{\Delta p_{Nom.}}}$

⁴⁾ Measured with load (100 bar pressure drop/two control edges).


Flow curves

at $\Delta p = 35$ bar per metering edge


Spool type **E01/E50**

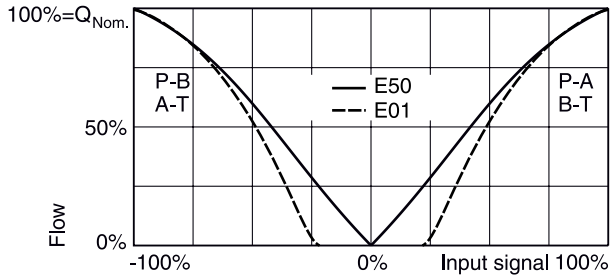

Spool type **B60**

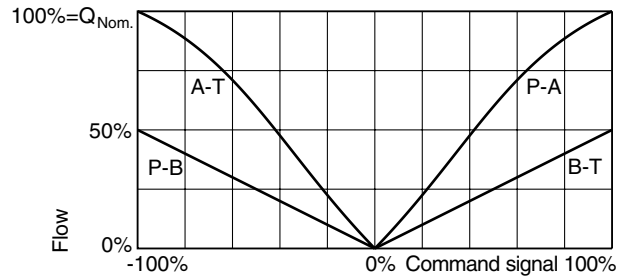


Pressure gain

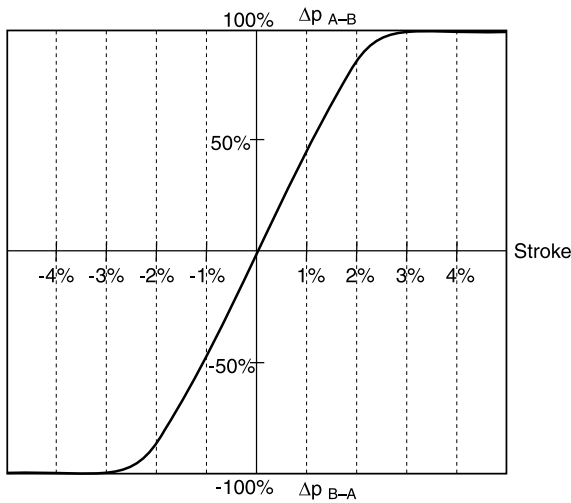

Functional limits


at 25 %, 50 %, 75 % and 100 % command signal

Spool type **E50M**

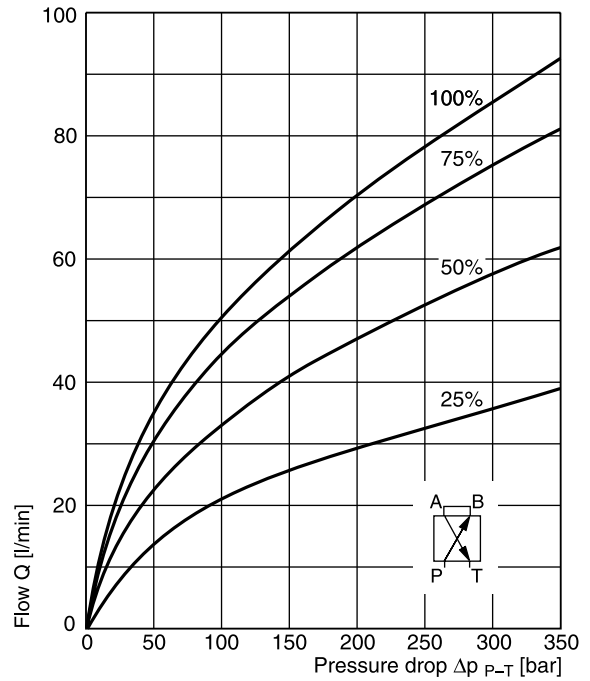


Frequency response

±5 % command signal
 ±90 % command signal

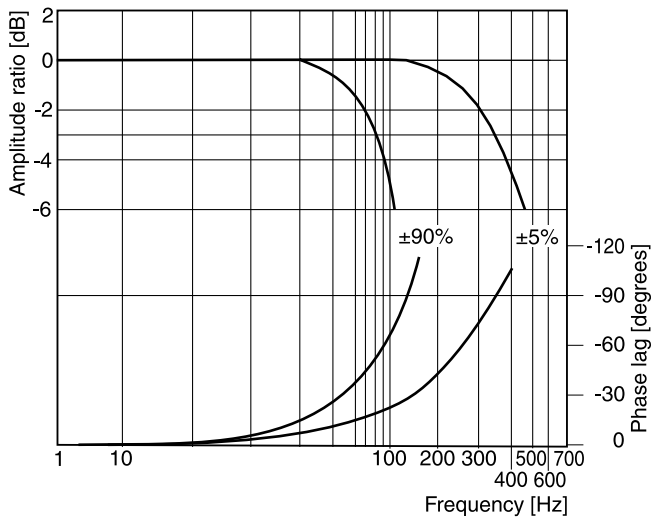


All characteristic curves measured with HLP46 at 50 °C.


Code 0

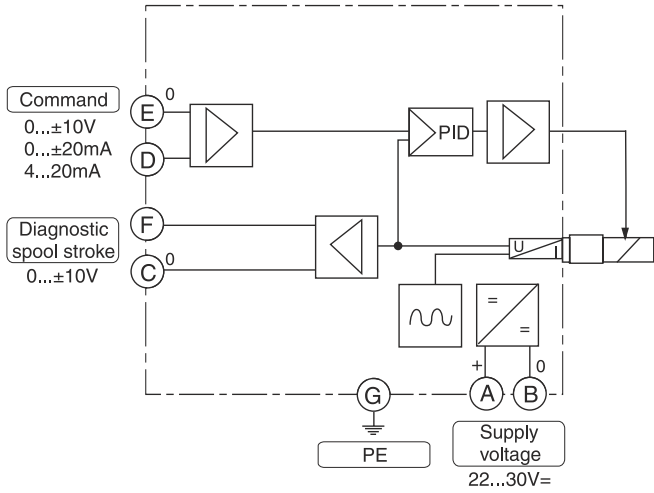


6 + PE




Code 5

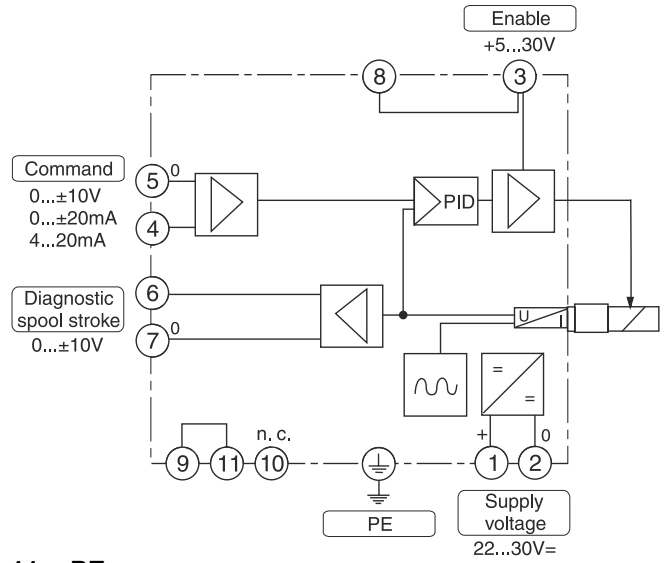


11 + PE



Code 7

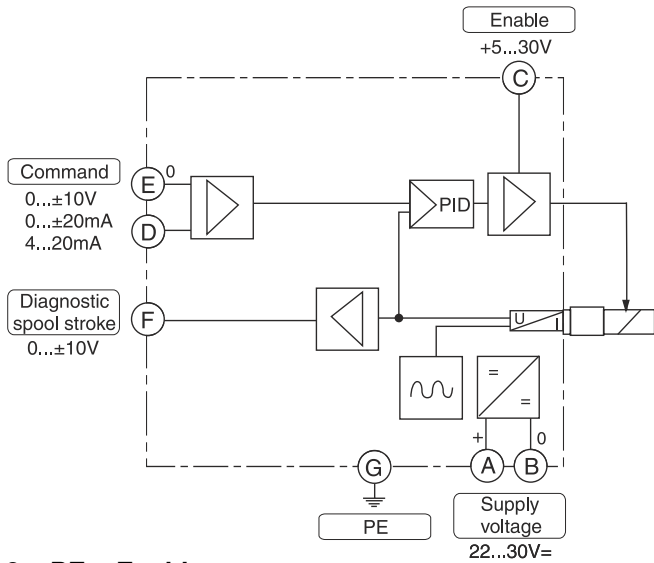

6 + PE + Enable



ProPxD interface program

The ProPxD software allows quick and easy setting of the digital valve electronics. Individual parameters as well as complete settings can be viewed, changed and saved via the comfortable user interface. Parameter sets saved in the non-volatile memory can be loaded to other valves of the same type or printed out for documentation purposes.


The PC software can be downloaded free of charge at www.parker.com/euro_hcd – see page “Support”.

Features




- Comfortable editing of valve parameters
- Saving and loading of customized parameter sets
- Executable with all Windows® operating systems from Windows® XP upwards
- Simple communication between PC and valve electronics via serial interface RS232



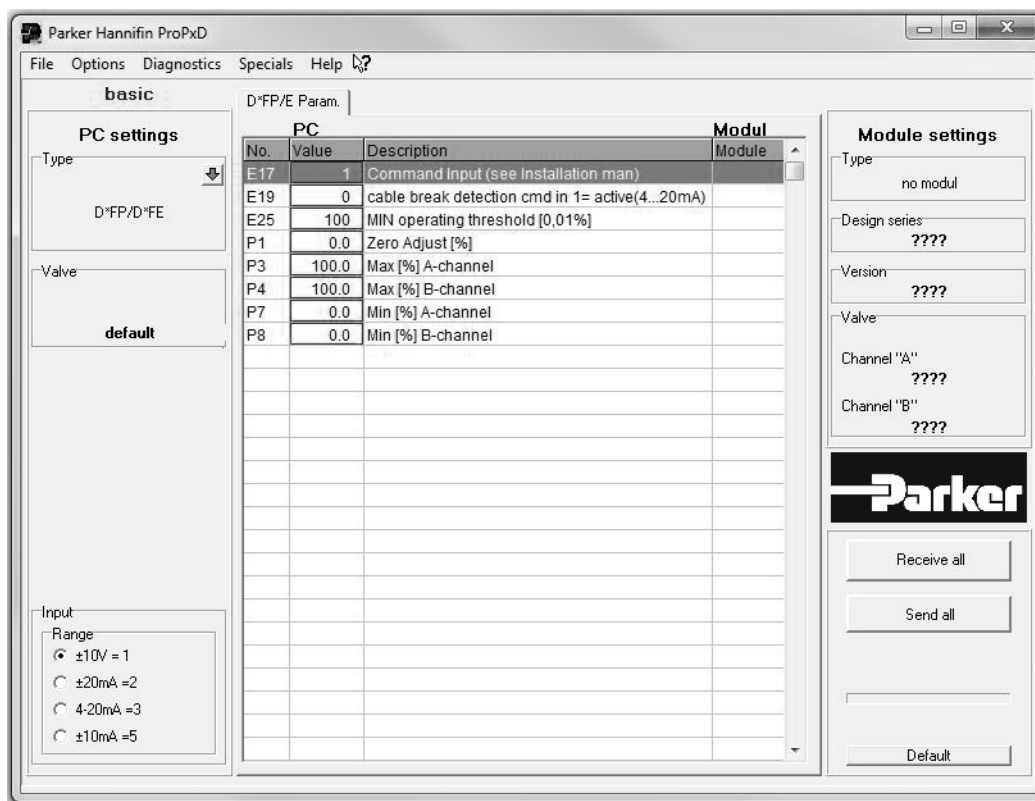


The valve electronics cannot be connected to a PC with a standard USB cable – this can result in damages of PC and/or valve electronics.

The parametrizing cable may be ordered under item no. 40982923.

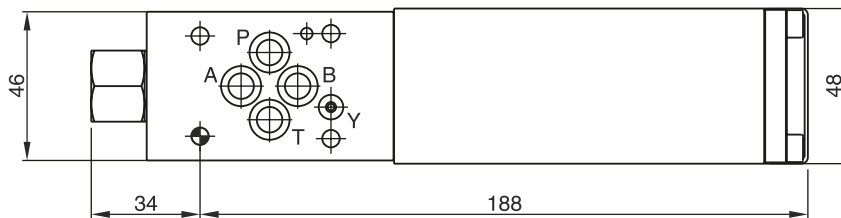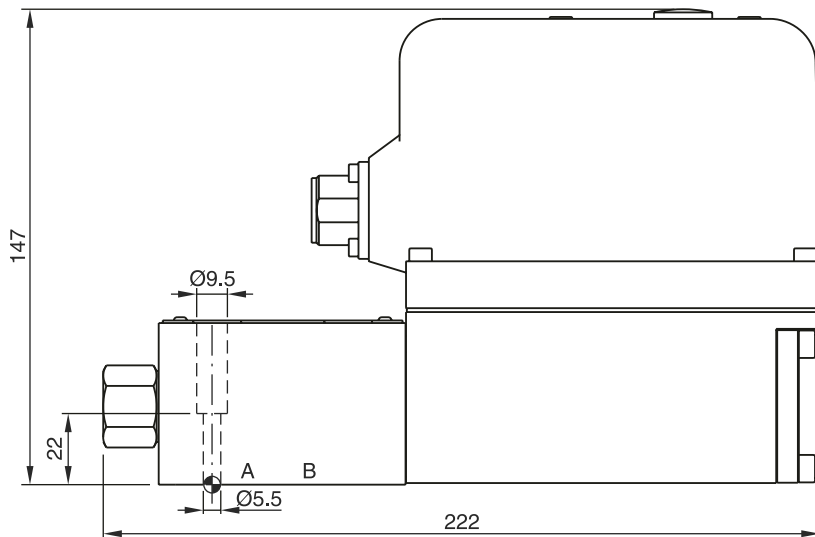

3



Surface finish	 Kit	 Kit	 Kit	 Kit
	BK375	4x M5x30 ISO 4762-12.9	7.6 Nm ±15 %	NBR: SK-D1FP FPM: SK-D1FP-V HFC: SK-D1FP-H