

Data sheet

Hydraulic screw coupling, Sleeve Size.4, G 3/4"(Female thread)

Item number:

511327.4



Example illustration

Item description

Function:

Quick fastener screw couplings shut off on the plug and the sleeve when uncoupled. The connection of the coupling sleeve and coupling plug is carried out via a screw connection with hand nut. During the coupling procedure, the valve chamber is sealed before the valves open. When uncoupling, the valves are already closed, before the connection can be pulled out of the seal. Can be coupled up to max. 50 bar under pressure

Materials:

zinc plated steel, seal: NBR

Temperature range:

-20°C to +100°C

Advantages:

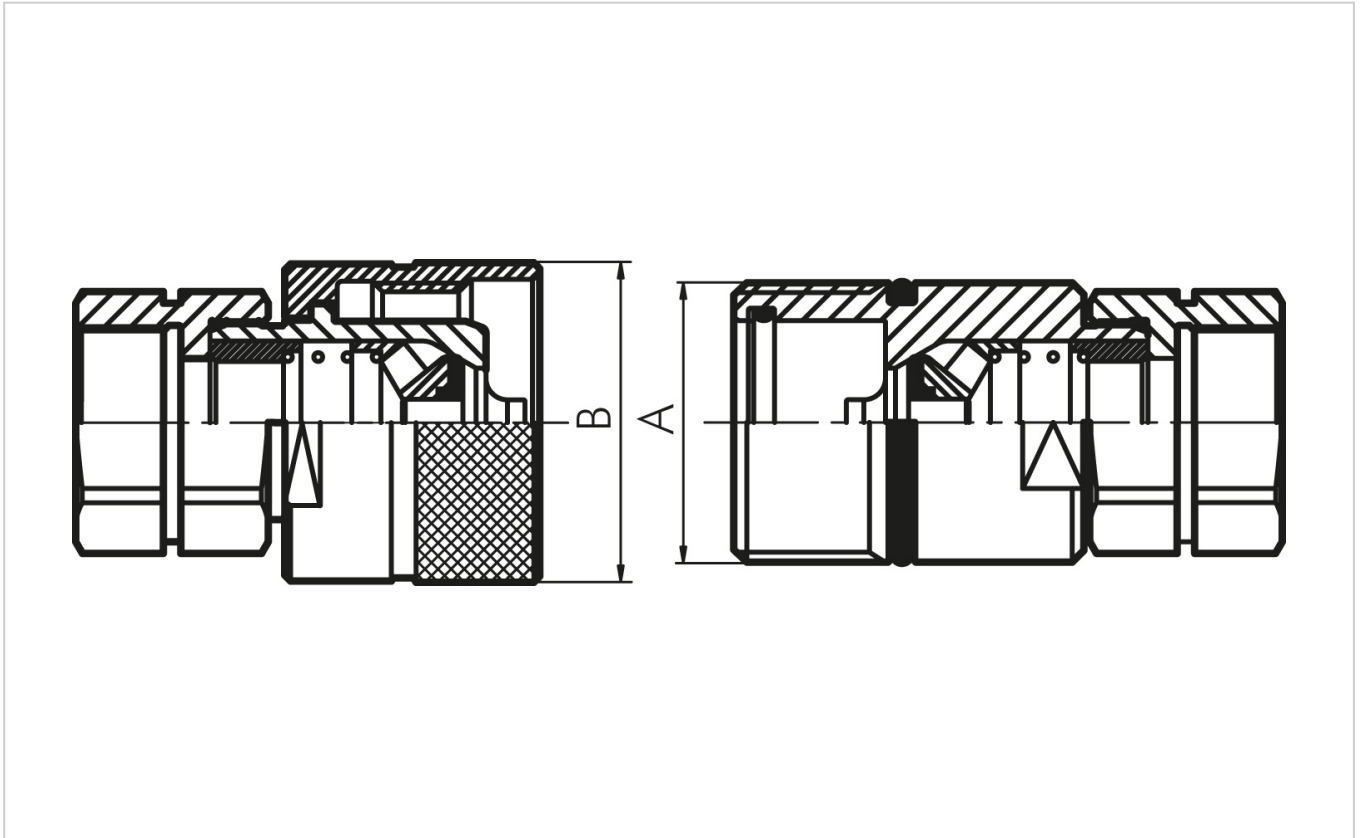
- secure against pressure thrusts and pressure vibrations,
- streamlining design of the flow rate range

Properties

Version	Sleeve
Thread internal	G 3/4"
A	M 42x2
B [mm]	48
DN [mm]	20
size	4
PN [bar]	400

Further information:

Weight	470 g / pcs
GTIN	4050571202385
Customs duty number	84812010
RoHS compliant	Yes

Drawing:

Drawing: Sizing for screw couplings

More information on this item and the process for ordering it can be found in our online shop
<https://www.landefeld.com> under item number **511327.4**.

Landefeld Druckluft und Hydraulik GmbH · Konrad-Zuse-Straße 1 · 34123 Kassel · Germany

All data are to be understood as non-binding reference values! We do not assume liability for any data selection not confirmed in writing. Unless otherwise specified, pressure values refer to liquids from Group II at +20°C.

As of: 07.07.2023