

# Data sheet

## High pressure 3-way ball valve, L-borehole, G 3/8", 0 to 500bar

**Item number:**

KH 3/38 L HD



Example illustration

## Item description

**Materials:**

Housing: zinc-plated steel, ball: hard chromium-plated steel, seal: POM / NBR, handle: zinc die-casting (from DN 20: straight - aluminium, angled - zinc-plated steel)

**Temperature range:**

-10°C to +80°C

**Media:**

Hydraulic oils, heating oil (water only after release by us). Apply input pressure only on the centre hole.

**Switching position:**

Can be changed by moving the handle, according to table, to position T4. The standard position for T boreholes is position T1.

**Optional:**

NPT thread **-NPT**, pressurisation from all 3 sides (PN 400, >= G 1/2": PN 350), housing burnished **-D3**

## Properties


<b>borehole</b>	L-borehole
<b>G</b>	G 3/8"
<b>DN [mm]</b>	10
<b>PN [bar]</b>	0 to 500
<b>Version</b>	Standard
<b>SW [mm]</b>	9
<b>Replacement handles aluminium straight</b>	G KH SW9

Replacement handles steel elbowed	G KH SW9 GK
-----------------------------------	-------------

**Further information:**

Weight	550 g / pcs
GTIN	4050571418304
Customs duty number	84818081
RoHS compliant	Yes
Manufacturer	Hydac

**Drawing:**

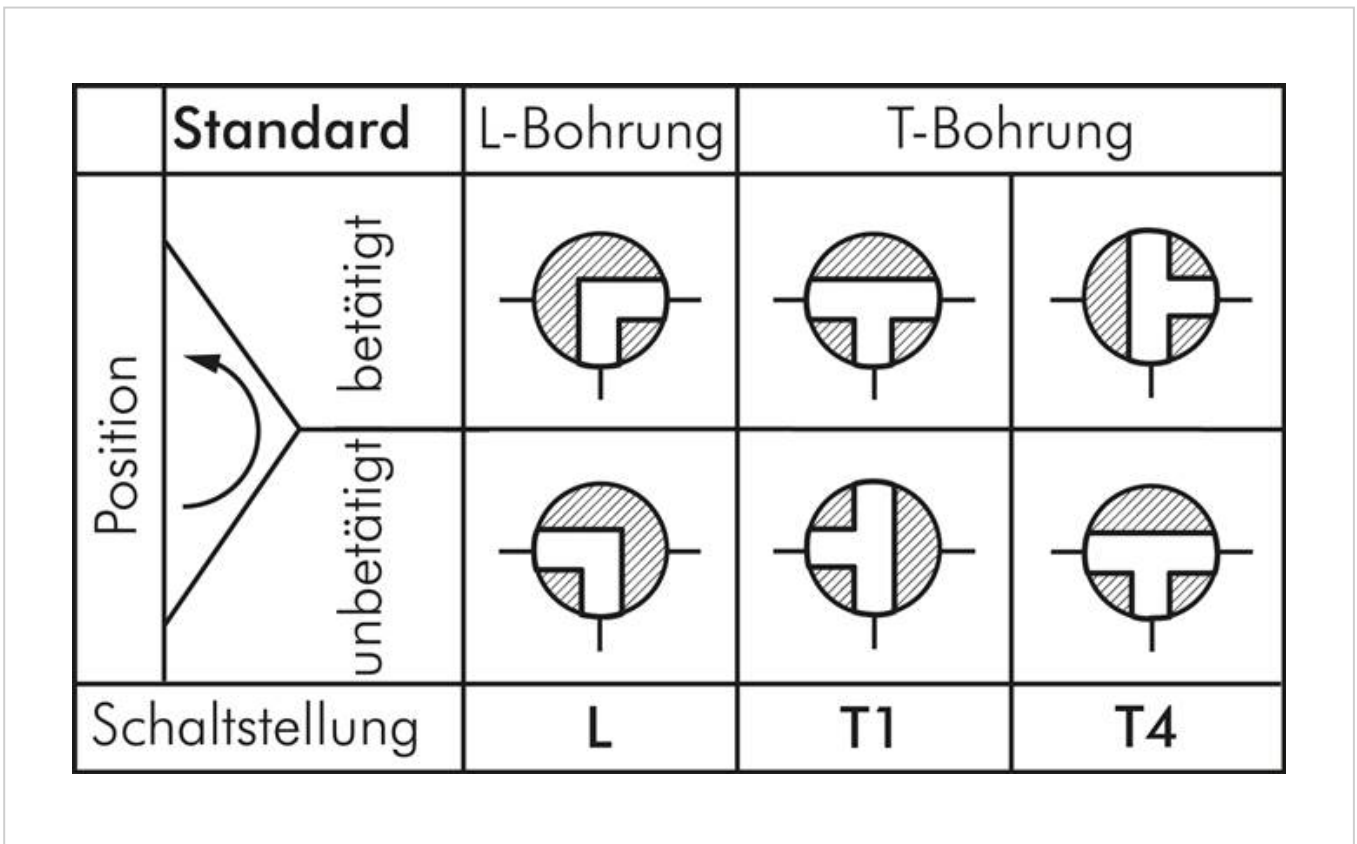

Drawing: Switching position

More information on this item and the process for ordering it can be found in our online shop <https://www.landefeld.com> under item number **KH 3/38 L HD**.

Landefeld Druckluft und Hydraulik GmbH · Konrad-Zuse-Straße 1 · 34123 Kassel · Germany

*All data are to be understood as non-binding reference values! We do not assume liability for any data selection not confirmed in writing. Unless otherwise specified, pressure values refer to liquids from Group II at +20°C.*

As of: 28.06.2023