


Data sheet

Home > Solenoid/Pneumatic/Manual/Mechanical Valves - Speed Controller - Exhaust Silencers > Pneumatically actuated valves - Airtec > 5/3-way pneumatic valves, Model series P > P 07 530

5/3-way pneumatic valve, G 1/4", Centre position closed, Standard

Item number:

P 07 530

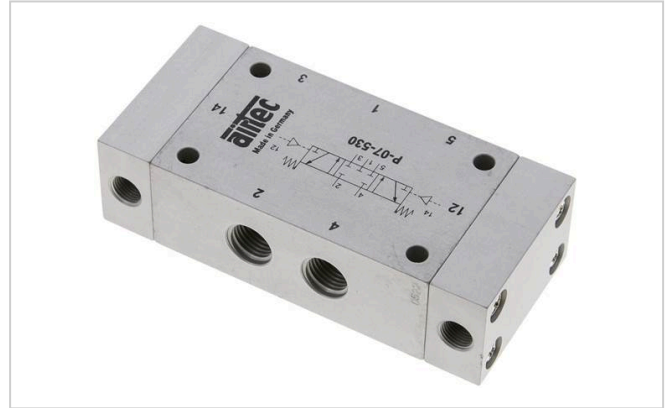

Example illustration

Item description

Materials:

Body: anodized aluminium, internal parts: aluminium and stainless steel, seals: plastic and NBR

Temperature range:

-10°C to +70°C

Media:

oiled and unoled filtered compressed air

Pressure input:

Connection 1

Properties

Version	Standard
function	Centre position closed
Thread (3x)	G 1/4"
Thread exhaust air (2x)	G 1/4"
Thread control connection (2x)	G 1/8"
Nominal width [mm]	9
flow [l/min]	1300
Operating pressure [bar]	0 - 8

Control pressure [bar]	3 - 8
------------------------	-------

Further information:

Weight	420 g / pcs
GTIN	4050571538217
Customs duty number	84812090
RoHS compliant	Yes
Manufacturer	Airtec

More information on this item and the process for ordering it can be found in our online shop <https://www.landefeld.com> under item number **P 07 530**.

Landefeld Druckluft und Hydraulik GmbH · Konrad-Zuse-Straße 1 · 34123 Kassel · Germany

All data are to be understood as non-binding reference values! We do not assume liability for any data selection not confirmed in writing. Unless otherwise specified, pressure values refer to liquids from Group II at +20°C.

As of: 18.09.2024