

# Data sheet

**LANDEFELD**

## Hydraulic reducer G 3/4"(male thread)-G 1/4"(Female thread), Zinc plated steel, Elastomer seal

**Item number:**

RI 3/4 X 1/4 ED



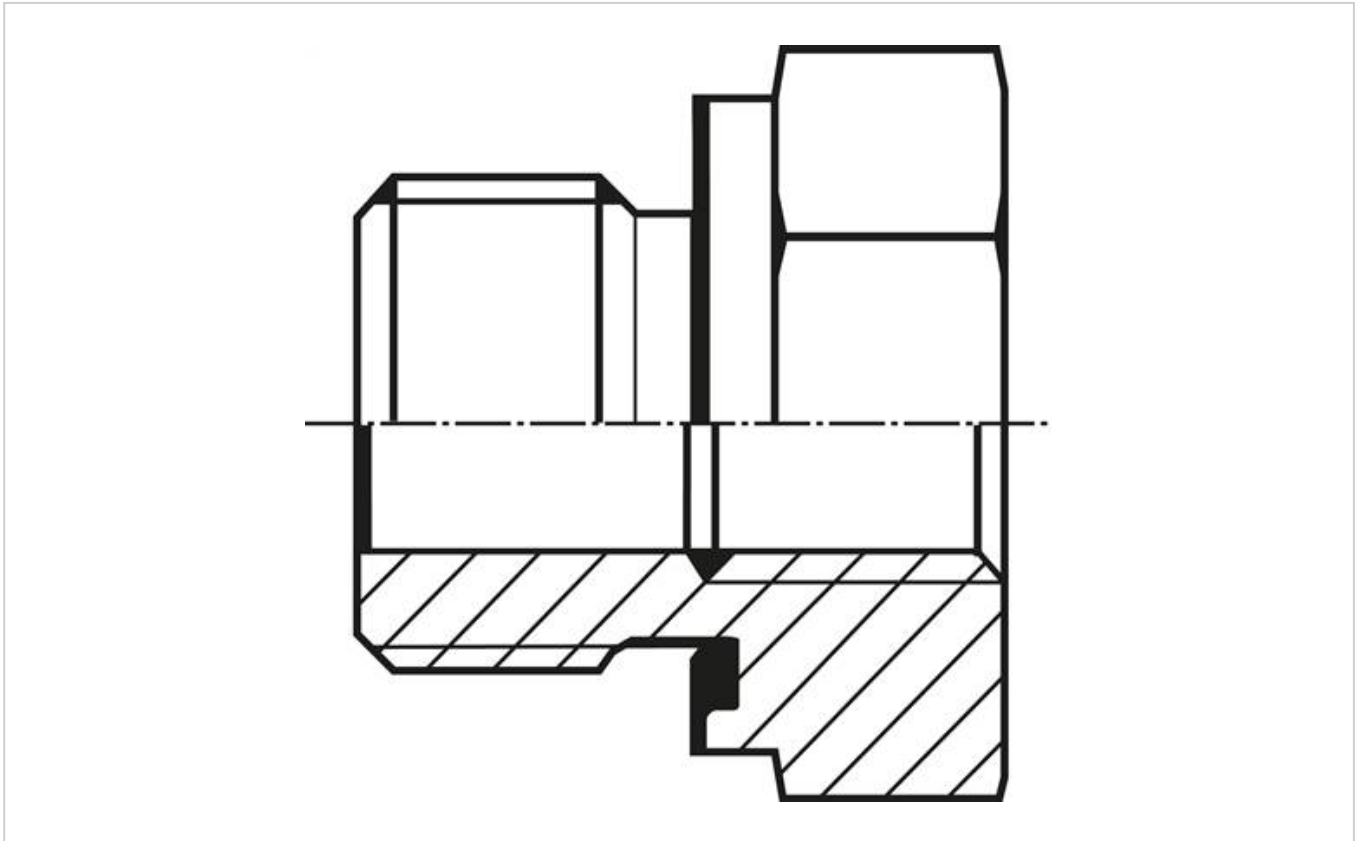
Example illustration

## Properties

|                               |                                      |
|-------------------------------|--------------------------------------|
| <b>Material</b>               | Zinc plated steel,<br>Elastomer seal |
| <b>Thread external</b>        | G 3/4"                               |
| <b>Thread internal</b>        | G 1/4"                               |
| <b>PN [bar]</b>               | 400                                  |
| <b>Temperature range [°C]</b> | -35 to +100                          |

## Further information:

|                            |               |
|----------------------------|---------------|
| <b>Weight</b>              | 100 g / pcs   |
| <b>GTIN</b>                | 4050571580629 |
| <b>Customs duty number</b> | 73079910      |
| <b>RoHS compliant</b>      | Yes           |

**Drawing:**

Drawing

More information on this item and the process for ordering it can be found in our online shop  
<https://www.landefeld.com> under item number **RI 3/4 X 1/4 ED**.

Landefeld Druckluft und Hydraulik GmbH · Konrad-Zuse-Straße 1 · 34123 Kassel · Germany

*All data are to be understood as non-binding reference values! We do not assume liability for any data selection not confirmed in writing. Unless otherwise specified, pressure values refer to liquids from Group II at +20°C.*

As of: 28.06.2023