

# Data sheet

## 3/2-way pneumatic valve, G 1/8", open (NO)

**Item number:**

RV 3211-06H A



Example illustration

### Item description

**Materials:**

Body and slider: aluminium, seals: NBR, pilot: polyamide

**Temperature range:**

-5°C to +60°C

**Operating pressure:**

1,5 - 8 bar

**Control pressure:**

2 - 8 bar

**Media:**

oiled and unoled filtered compressed air

**Service life:**

min. 40 million switching cycles

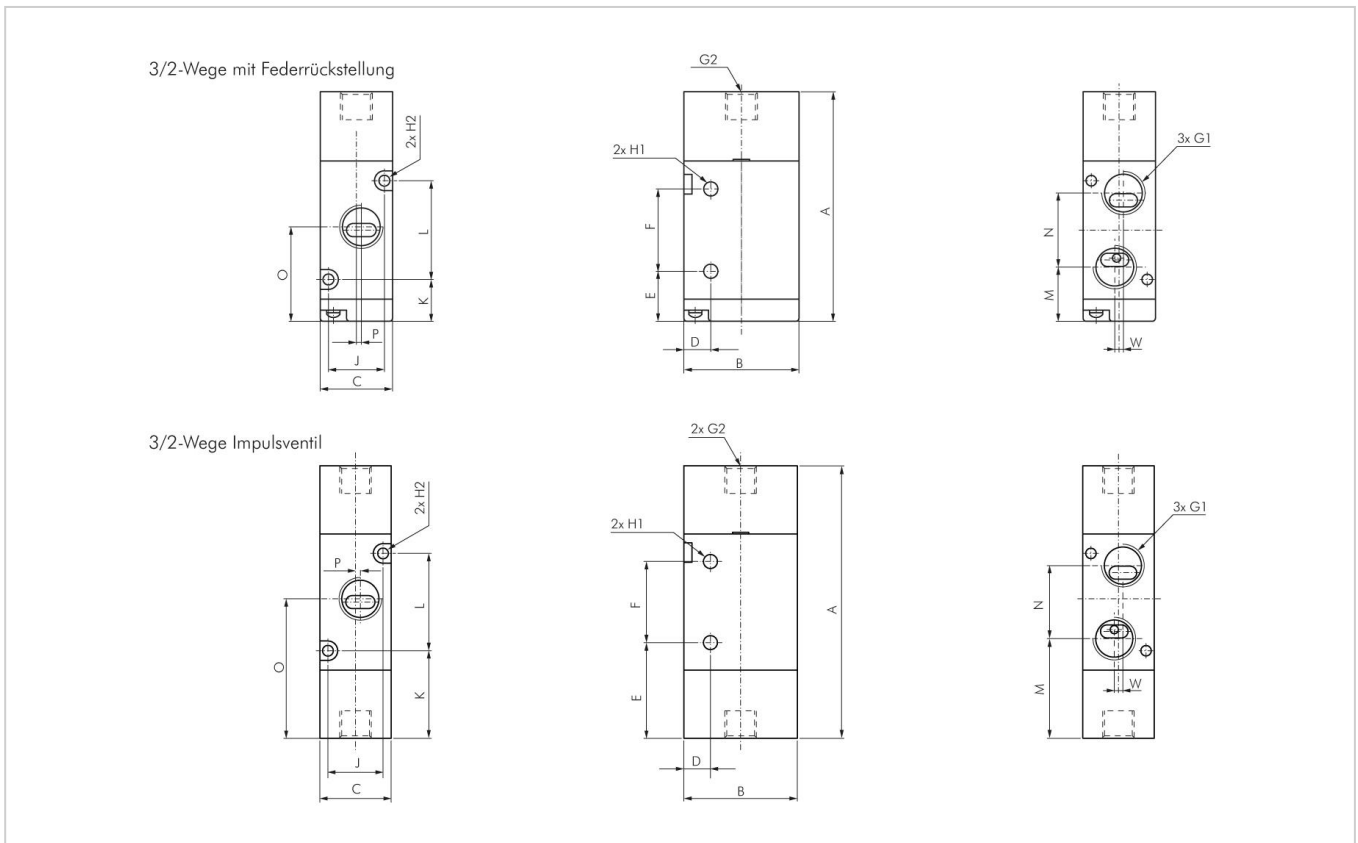
### Properties

<b>function</b>	open (NO)*
<b>Gewinde G1 (2x)</b>	G 1/8"
<b>Gewinde Abluft G1 (1x)</b>	G 1/8"
<b>Gewinde Steueranschluss G2</b>	G 1/8"
<b>Nominal width [mm]</b>	3,9
<b>flow [l/min]</b>	500

<b>A [mm]</b>	57,7
<b>B [mm]</b>	27
<b>C [mm]</b>	18
<b>D [mm]</b>	7,5
<b>E [mm]</b>	15,5
<b>F [mm]</b>	21
<b>H1 [mm]</b>	3,2
<b>H2 [mm]</b>	3,3
<b>J [mm]</b>	13
<b>K [mm]</b>	16,5
<b>L [mm]</b>	19
<b>M [mm]</b>	18
<b>N [mm]</b>	16
<b>O [mm]</b>	27
<b>P [mm]</b>	-1,5
<b>W [mm]</b>	2

### Further information:

<b>Weight</b>	70 g / pcs
<b>GTIN</b>	4050571714703
<b>Customs duty number</b>	84812090
<b>RoHS compliant</b>	Yes
<b>Manufacturer</b>	EMC

**Drawing:**

Drawing

More information on this item and the process for ordering it can be found in our online shop  
<https://www.landefeld.com> under item number **RV 3211-06H A**.

Landefeld Druckluft und Hydraulik GmbH · Konrad-Zuse-Straße 1 · 34123 Kassel · Germany

*All data are to be understood as non-binding reference values! We do not assume liability for any data selection not confirmed in writing. Unless otherwise specified, pressure values refer to liquids from Group II at +20°C.*

As of: 07.07.2023