
BUS R06K1-XA-02/015-S75G

Order Code: BUS004K





1) Set sensor, 2) Mounting plate, 3) Status indicator, 4) Operating voltage/mode, 5) Ultrasonic transducer axis

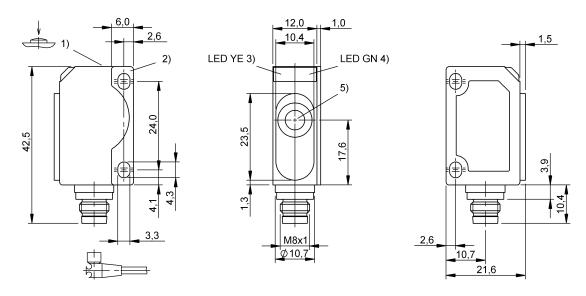





Rasin	footi	Iroc

Dasio reatares	
Application	Distance measurement
Approval/Conformity	CE
	WEEE
	UKCA
Operating mode	Analog measurement (output
	curve)
Series	R06K1
	UKCA Analog measurement (output curve)

Display/Operation

1 9: 1	
Adjuster	button
Display	Mode - LED green, flashing LED green: Power Object in range - LED yellow
Setting	Key disable on/off Factory setting (Reset) Output curve rising/falling Output curve window

Electrical connection

Connection	M8x1-Male, 4-pin
Polarity reversal protected	yes
Short-circuit protection	yes

Electrical data

Current draw max.	25 mA
Input function	Synchronization signal
Load resistance RL min. (Analog V)	100 kOhm
Operating voltage Ub	2030 VDC
Rated operating voltage Ue DC	24 V
Synchronization	external, any number of sensors
Ultrasonic Frequency	380 kHz
Environmental conditions	

Ambient temperature

IP rating	IP67
Storage temperature	-4085 °C
Functional safety	
MTTF (40 °C)	516 a
Interface	
Analog output	Analog, voltage 010 V

-25...70 °C

Output characteristic

Output characteristic	linear rising/falling
Material	

Housing material	ABS
Material sensing surface	PU foam/Epoxy resin/Glass

Ultrasonic Sensors

BUS R06K1-XA-02/015-S75G Order Code: BUS004K



Mechanical data

Dimension 12 x 42.5 x 21.6 mm

Mounting part Screw M3

Range/Distance

Measuring range20...250 mmRated operating distance Sn150 mmRepeat accuracy \pm 0.15 %FSResolution \leq 0.056 mm

Remarks

For additional information, refer to user's guide.

Order accessories separately.

Do not press key using a pointed tool.

Reference object for Sn: tube ø10mm. Max. range refers to the aligned plate.

The sensor is functional again after the overload has been eliminated.


For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams



BVLLUFF

Order Code: BUS004K

