


**BULKHEAD WATER PROOF F-F BETWEEN SERIES  
ADAPTOR CERAMIC INSULATOR**


**R176.754.150**  
SERIES HN

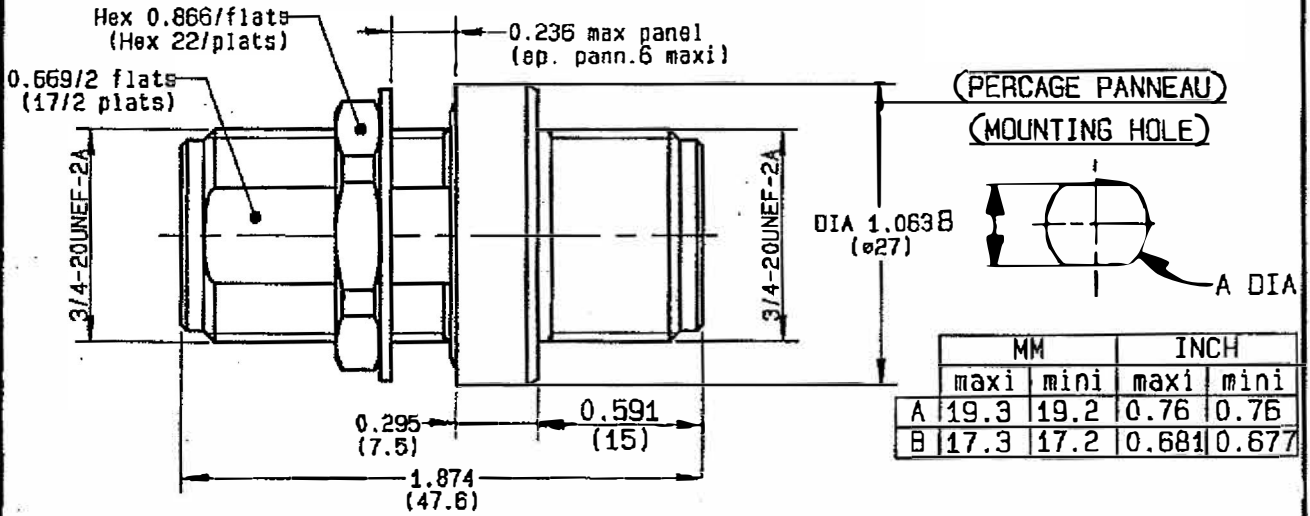

NOMINAL IMPEDANCE	25	Ω
FREQUENCY RANGE	0-3	GHz
TEMPERATURE RATING	-55/+155	°C
V.S.W.R	NA +	x F(GHz)Maxi
RF INSERTION LOSS	NA	√F(GHz) dB Maxi
VOLTAGE RATING	900	Vdc Maxi
DIELECTRIC WITHSTANDING VOLTAGE	NOTA	Veff Mini
INSULATION RESISTANCE	*	M ΩMini
HERMETIC SEAL	NA	Atm.cm <sup>3</sup> /s
LEAKAGE (pressurized only)	NA	MPa
MECHANICAL DURABILITY		Cycles
WEIGHT		gr
SPECIFICATION	1 410 015 H	

CABLES :	
OTHERS CHARACTERISTICS	
	*10 exp 12 Ohms under 500 Vdc
	Nota : 3500 Veff mini during 1 mn with leakage current <1mA
CABLE RETENTION	NA N Mini
CENTER CONTACT RETENTION	
Axial force - mating end	NA N Mini
Axial force - opposite end	NA N Mini
Torque	NA cm.N Mini
RECOMMENDED TORQUES	
Mating	NA cm.N
Panel nut	NA cm.N
Clamp nut	NA cm.N

CONNECTOR PARTS:	MATERIALS	FINISH	(all values are given in micrometers)
BODY	BRASS	NICKEL	
OUTER CONTACT	BRASS	NICKEL	
CENTER CONTACT	BERYLLIUM COPPER	GOLD	
INSULATOR	CERAMIC	-	
GASKET	SILICONE RUBBER	-	
OTHERS PIECES			

BER T	ISSUE	CREATION DATE	FILE PART-NUMBER	
	28-10-22 F	14-DEC-77		

The information given here is subject to change without notice. Design changes may be in order to improve the product.

Connect to the future