



NEW Digital Fiber Optic Sensor
FS-N40 Series

A Return To Simplified Sensing




A Genuine All-Purpose Solution
Easier and More Stable Than Ever Before

FS-N40 Series

A SIMPLE and RELIABLE Solution for Any Application

Fiber optic sensors provide a variety of solutions that are unmatched by any other type of sensor. The high-powered, yet precise, amplifier combines with a variety of flexible and compact fiber heads to tackle all sensing needs.

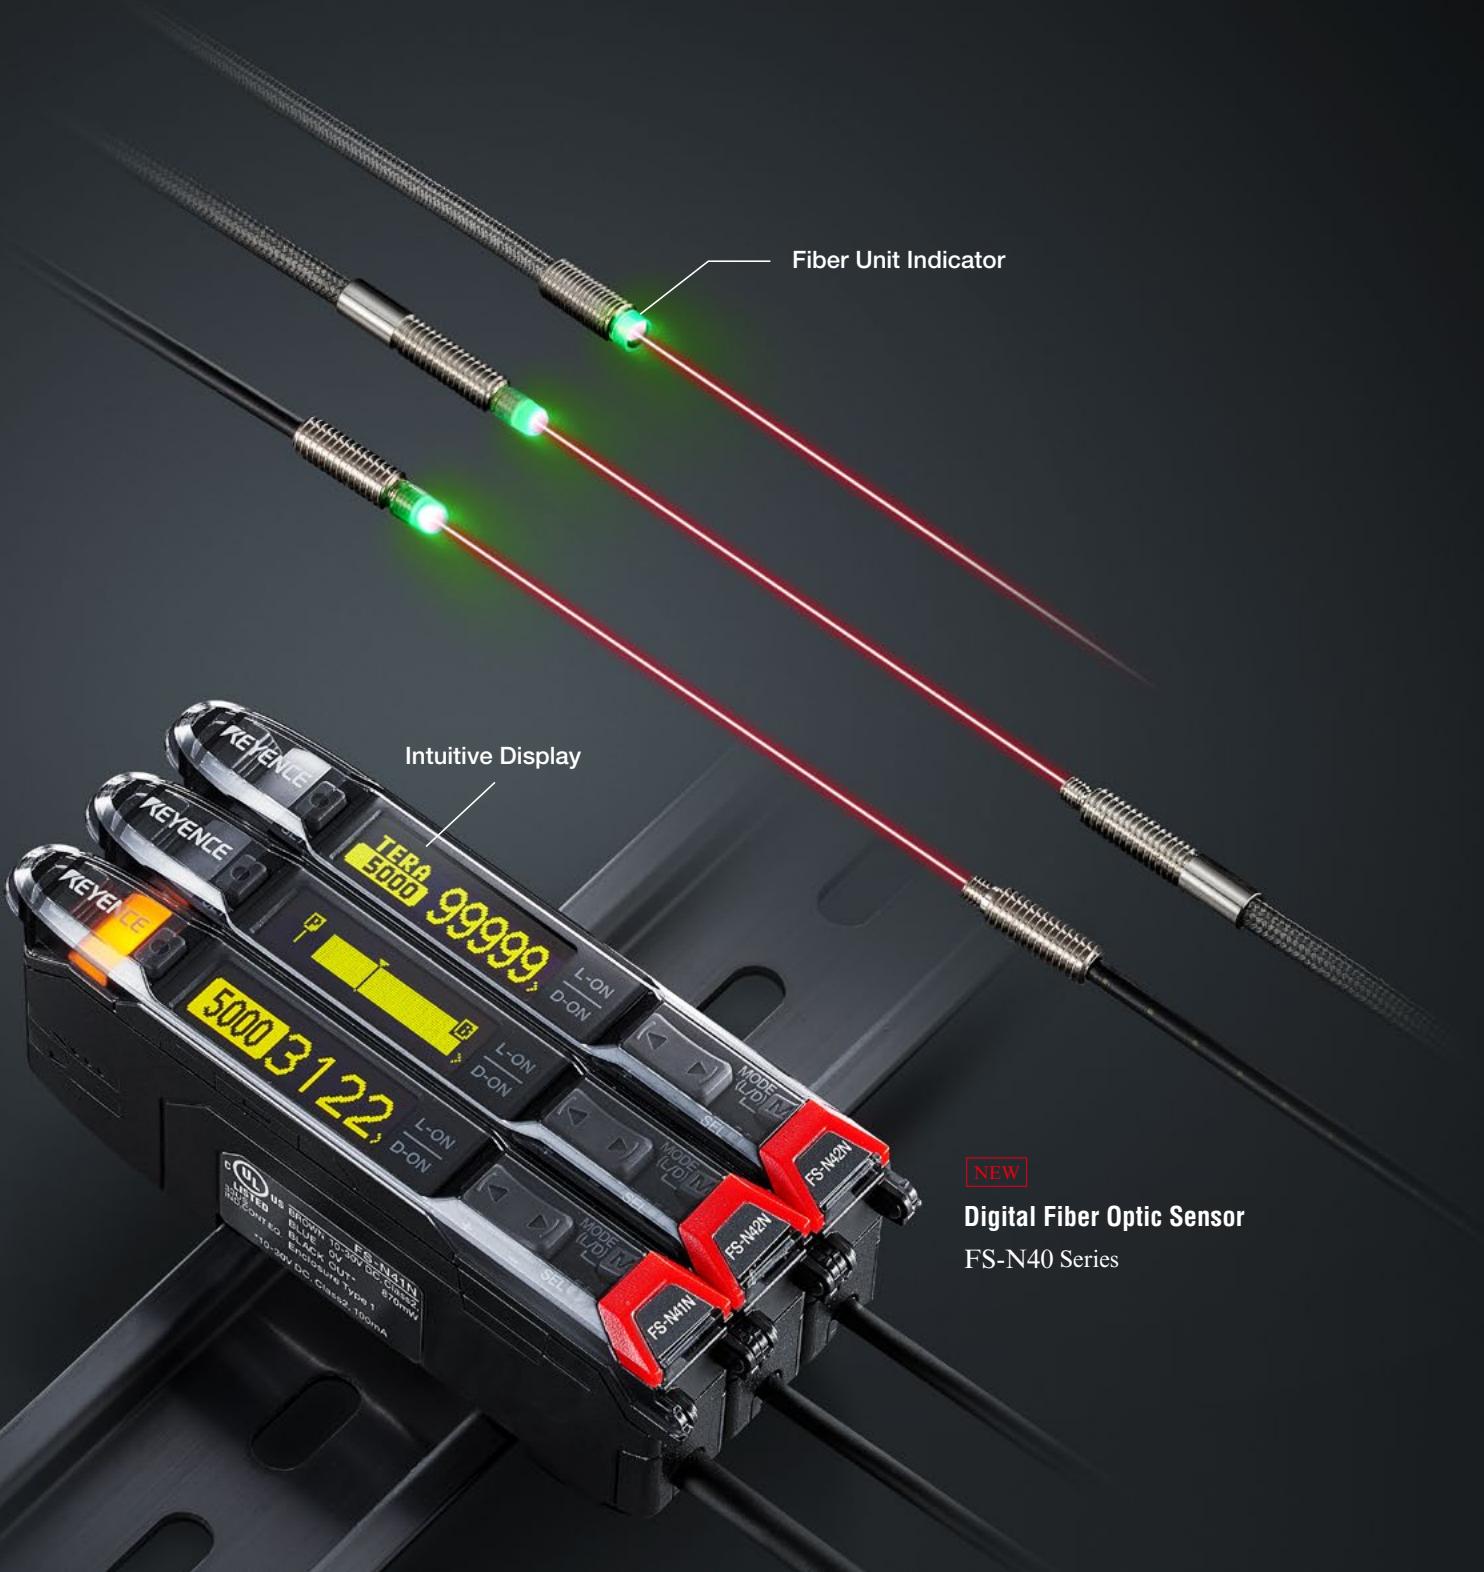

THE POWER OF FIBER OPTIC SENSING

FLEXIBLE

Handle any and all applications with one high-powered amplifier and a variety of head options.

- Detect Anything
- Detect Anywhere



SIMPLE

Setup is handled quickly and easily with this intuitive amplifier.

- Easy to Read Display
- Innovative Fiber Units



RELIABLE

Detection remains stable in any situation or environment.

- Built-In Preventive Maintenance
- Clear Status Indication



Flexible

Enhanced power makes the FS-N40 Series more capable than ever before.



Go from standard to high-power with the flick of a switch

Detect Anything




Contrasts/
Surface Finishes



Distant
Targets



Transparent
Targets

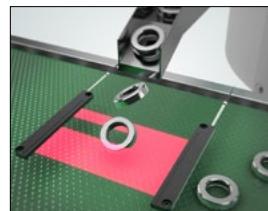


Targets in
Varying Positions



Small
Targets

Detect Anywhere

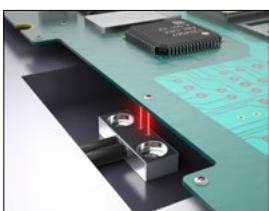

Tight
Spaces



Oily/Wet
Environments



High Temperature
Environments



Environments with
Chemicals



On Robotic
Arms

Long Range and Stable Detection with Any Head


With industry leading high-power, the FS-N40 Series enables long range detection with even the thinnest of fiber heads. This also ensures detection remains stable in environment where build-up occurs.



Thrubeam [1 mm 0.04" Cylindrical]	Previous (FINE) 140 mm 5.51"	FS-N40 (TERA) 800 mm 31.50"
Reflective [M3 Threaded]	Previous (FINE) 72 mm 2.83"	FS-N40 (TERA) 590 mm 23.23"

Increased Detection Capabilities

The FS-N40 Series has not only increased its power, but has also greatly improved its signal to noise ratio. This allows for consistent and reliable detection of changes in contrast, surface finish, and position.

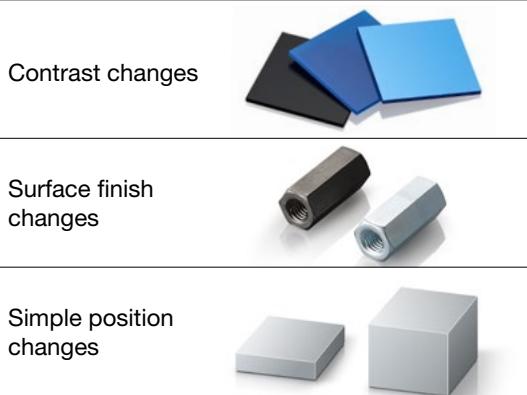


Deeper Understanding

New LED Module - "NEO Parabolic LED"

The high-power of the FS-N40 Series is derived from the use of a new LED module. This module boasts a high brightness LED and efficient circuit design, along with a parabolic mirror that ensures the majority of the light is transmitted into the fiber optic cable.

■ Evolution of LED Modules

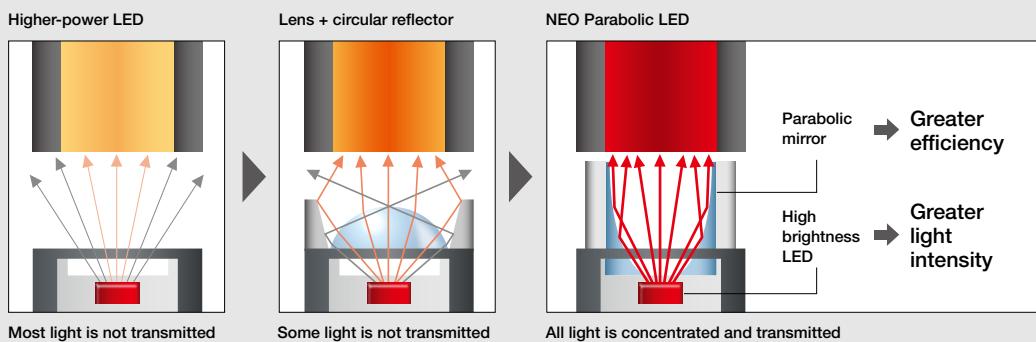

Simple

NEW INNOVATION

Easy to Read Display

No manuals required with this easy to understand interface.



Conventional Display

8888 8888

FS-N40 Display

A Power Modes C
B Light ON M

8888 8888

B Light ON M

D Detection Mode E

S Initialize M

Innovative OLED Display

The introduction of an OLED display places the FS-N40 Series leaps-and-bounds ahead of conventional fiber amplifiers. The ability to see clear and detailed information on a single screen dramatically reduces setup time.

Bar Graph Display

Simplify the display even further by representing the light intensity as a bar graph. This comes complete with a threshold point indicator and peak/bottom value flags.



Peak value ON/OFF point Bottom value

Easily Understandable Messages

No need to decipher cryptic display messages. Identify any issues or scenarios that the sensor may be experiencing by simply reading the display.

System Error


Keys Locked

Low Intensity

Check Dip Switch

Saturate Cancel

PIN Code

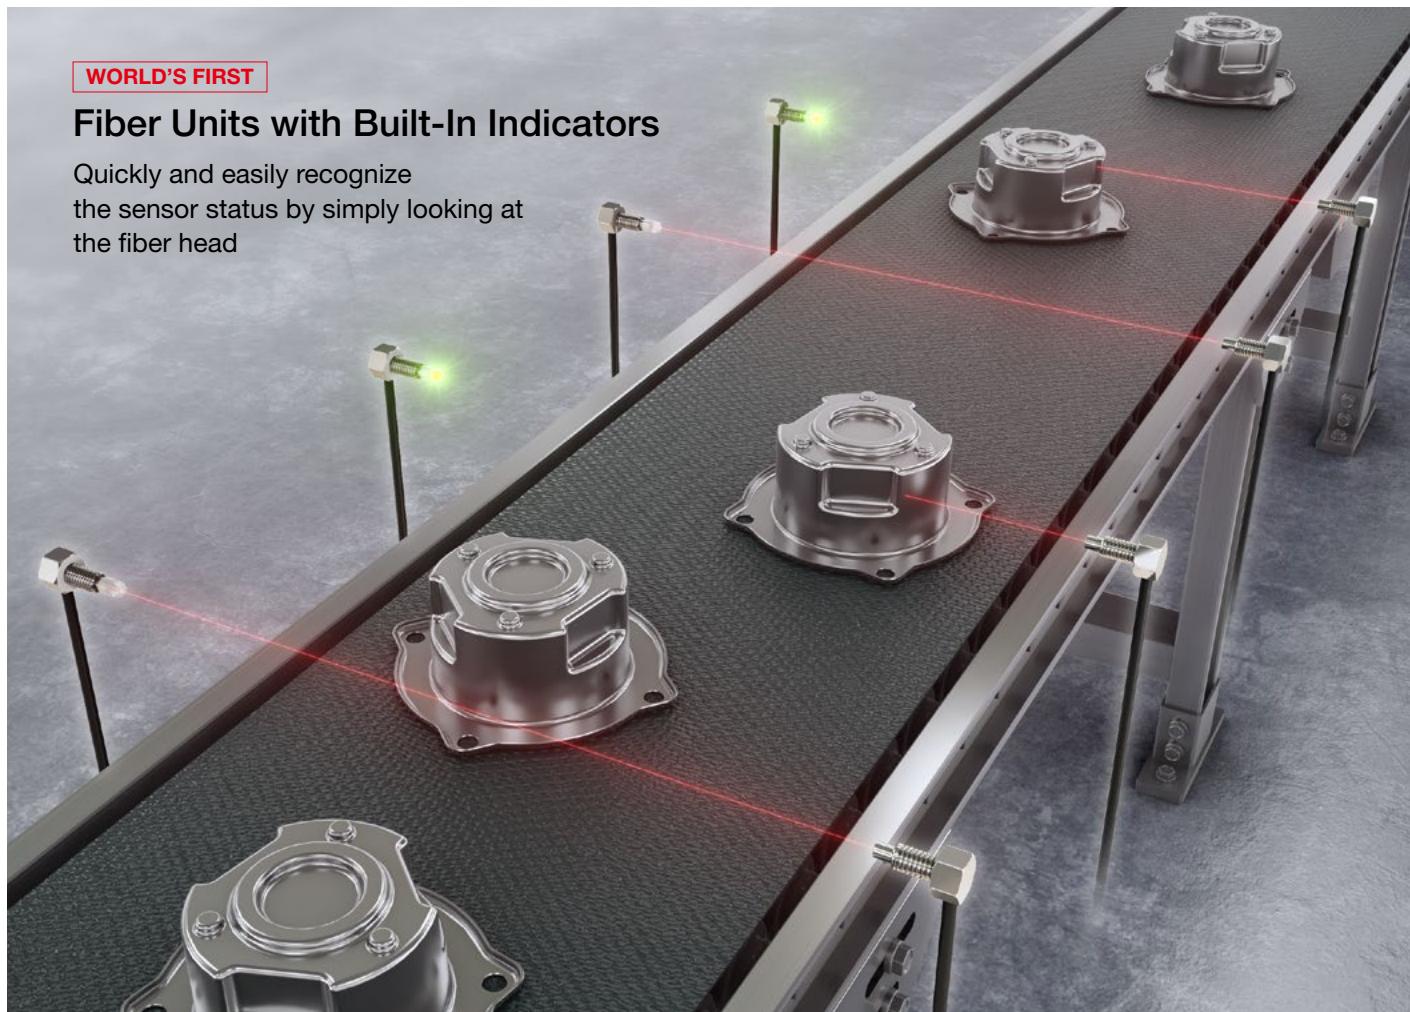


Integrated ON/OFF Status Indicators

It is no longer necessary to look inside of a control box and locate the proper amplifier to determine the detection status of a specific sensor. These innovative fiber heads, will light in Green when the output is ON for immediate recognition of the sensor status.

Alignment Assistance

Alignment has never been simpler with Optical Axis Assistance. The fiber unit illuminates when the two heads are aligned, eliminating the guesswork and time associated with alignment.

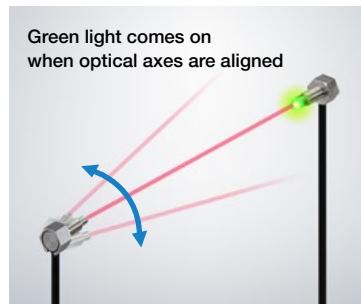

Easy Head Identification

Quickly recognize which head is being programmed by lighting the fiber head in green. This prevents any unnecessary confusion during setup.




Reliable

Built-In Preventive Maintenance Features


Harsh Environment Adjustment

Datum mode automatically adjusts the live and set values to compensate for build-up and maintain stable detection.

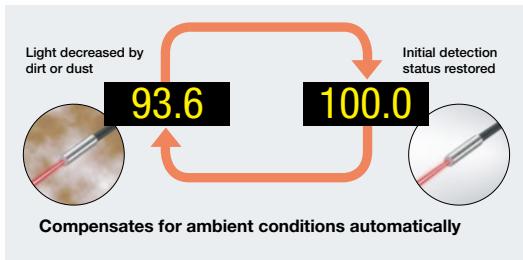


Automatic Power Control

When high precision detection is of the utmost concern, the light intensity can be automatically regulated to ignore the effects of power fluctuations.

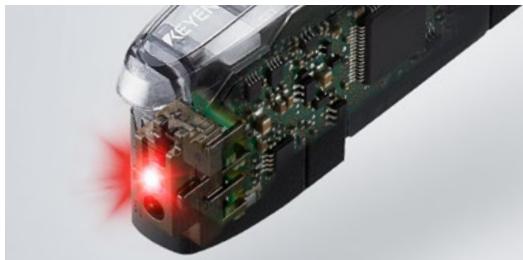

Interference Prevention

Prevent interference between up to 16 units that are connected together (KEYENCE 1-Line System), or 2 units that are not connected together.

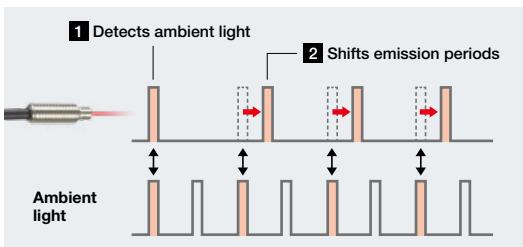

Heat Sink


Concerns about heat generation, and temperature induced strain on internal component, are eliminated with the built-in heat sink.



Customizable Interface for Clear Status Indications

Uniform Calibration and Display

With the push of a button, the set value and current value can be automatically calibrated to 50.0% and 100.0% respectively. This enables easy identification of detection statuses and maintenance needs at a glance.

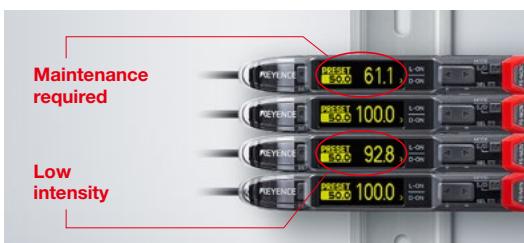

Various Display Options

The FS-N40 Series offers countless display and sub-display options. This allows users to view the data how they see fit and ensures clear understanding.



Additional Features

Highly Visible Indicator

The highly visible indicator, with an area 8.7x larger than conventional models, ensure that the ON/OFF status of the sensor can be seen from a distance.



Network Compatibility

Industrial network integration is possible with the use of the KEYENCE NU Series. Multiple network options are available!



EtherNet/IP™
DeviceNet™
CC-Link V2
EtherCAT®

Selectable Language Options

Language selection options for English, Japanese, Chinese, and German have been added to guarantee global ease-of-use.



Saturation Canceling

A simple button combination is all that is needed to eliminate saturation and ensure stable detection of transparent, tiny, or highly reflective targets.



IO-Link Compatibility

(FS-N41C Only)
The FS-N41C amplifier can communicate a large variety of information over IO-Link. This includes the live value, set value, settings, and much more.



IO-Link

Bipolar Outputs

(FS-N41C Only)
Regardless of NPN or PNP output needs, only one part number is required. The FS-N41C offers a bipolar selectable output.

Bipolar Outputs

NPN

PNP


Same model

NPN/PNP switching output

Multi-Output Unit


Dramatic Reductions in Cost and Time

Reduce Startup, Operation, and Maintenance Workloads

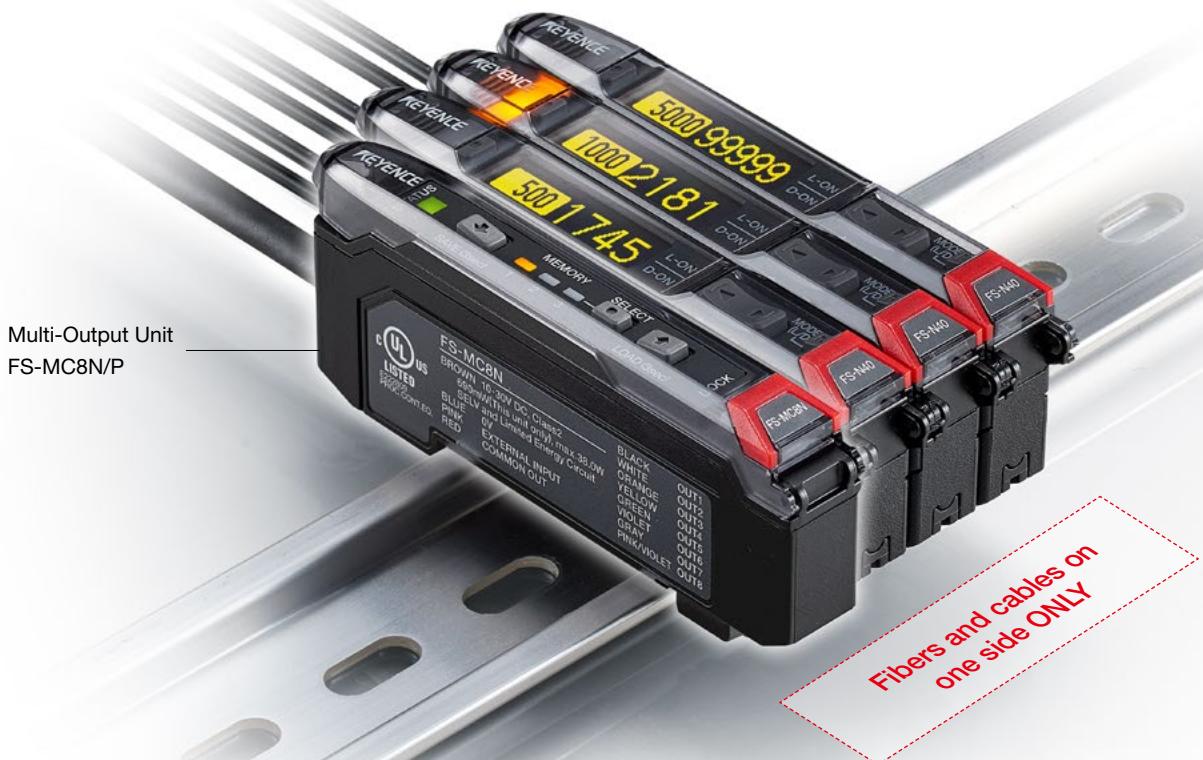

Reduced Cables

The Multi-Output Unit provides a clean cable layout with just one power supply/output cable coming from the device. Replacing or adding sensors has also never been easier; since now there is no longer a need to reroute cables.

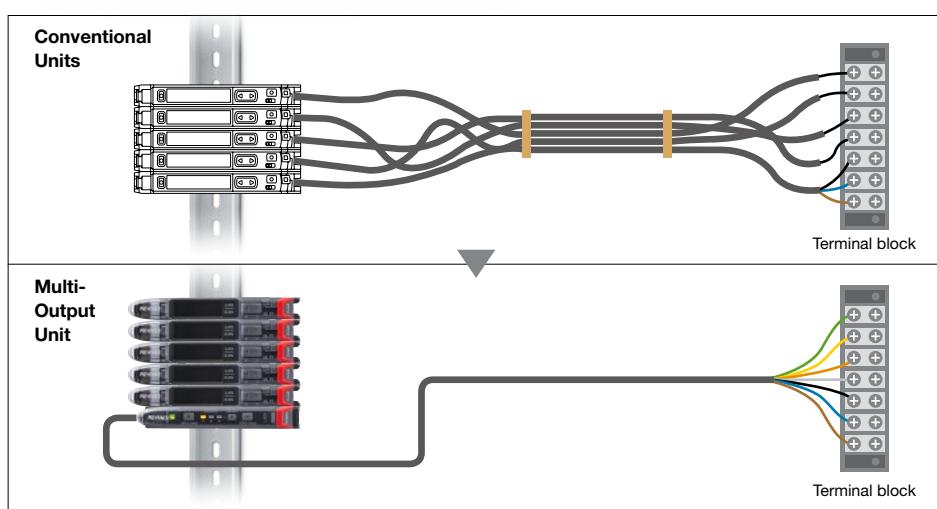

Memory Function

The settings for up to 8 connected amplifiers can be saved on the Multi-Output Unit. If any of the amplifiers need to be replaced, the settings can be batch written to the new amplifiers, eliminating the need for any manual recalibration. Up to 3 memory banks can be configured to provide easy changeover between different runs on a machine.



Benefits During Every Stage of Use

Setup	Changeover	Troubleshooting	Maintenance
Duplicate settings for fiber amplifiers installed on standard machines.	Quickly switch between 3 bank of settings when running different parts.	Return the sensors to their correct settings with the push of a button.	When replacing a unit, transfer necessary settings in seconds.

Easily Add Amplifiers without Extra Wiring

Adding amplifiers is a breeze with only one cable needing to be routed for the entire setup. Route this multi-core cable once and simply connect amplifiers as they become necessary.



Versatile Wiring and Expansion Options Options for Any Situation

When Network Compatibility is Necessary


Network
Communication
Unit



Network Communication Unit
NU Series

When Saving Space is Important

Multi-Output Unit

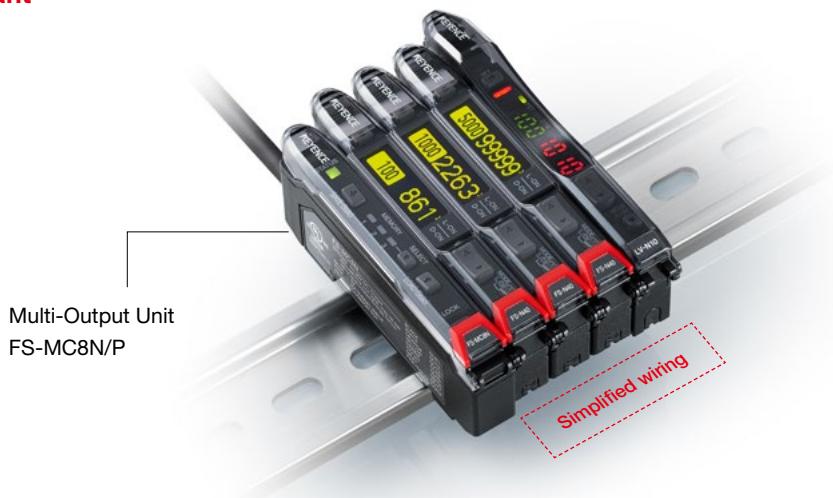


Multi-Output Unit
FS-MC8N/P

Simplified wiring

When Standard Connections are Adequate

Main Unit +
Expansion Units

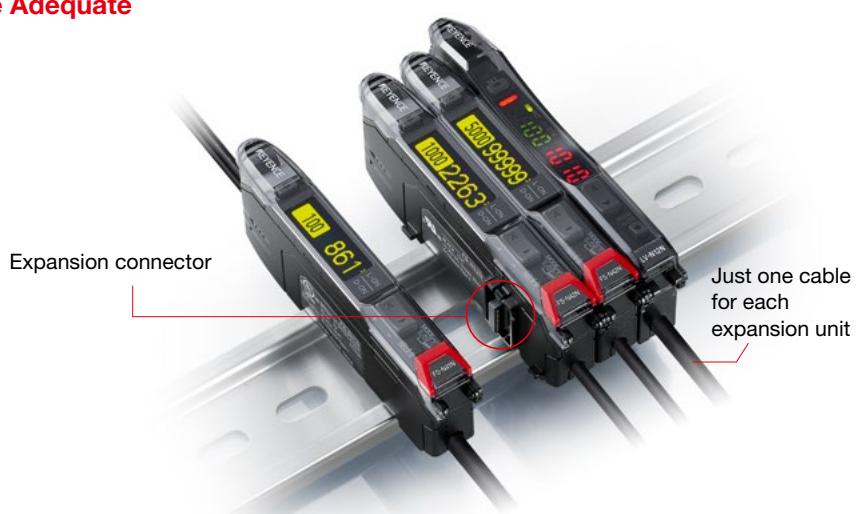

Expansion connector

Just one cable
for each
expansion unit

Compatible with a range of open industrial networks

- | Control multiple sensors at once via network communication

EtherNet/IP™

DeviceNet™

CC-Link V2

EtherCAT®

*EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

Increase Efficiency During Startup, Operation, and Maintenance

- | Memory function enables speedy settings recovery and easy changeover
- | Drastically decreases the number of necessary cables

Simplified Wiring

Easy Program Changeover

Effortless Maintenance

Best-Selling and Reliable Simplified Wiring

- | Connect up to 17 amplifiers, featuring stable interference prevention

Lineup

Amplifier Units

Cable type



Type	Model		Control outputs	External input
	NPN output	PNP output		
Standard	Main unit	FS-N41N	FS-N41P	1
	Expansion unit	FS-N42N	FS-N42P	
2-Output	Main unit	FS-N43N	FS-N43P	2
	Expansion unit	FS-N44N	FS-N44P	

M8 Connector type



IO-Link

Type	Model	Control outputs	External input
	Switchable between NPN/PNP output		
Main unit	FS-N41C	2 [*]	1 [*]

^{*}Switchable between 2 control outputs or 1 control output + 1 external input.
The system is not compatible with expansion units.

Zero line type



Type	Model	Control output
Expansion unit	FS-N40	None [*]

^{*}Counted as 1 output if expanded with Multi-Output Unit FS-MC8N/P or the NU Series communication unit.

Network Units

Type	Appearance	Network	Model
Communication unit		EtherNet/IP™	NU-EP1
		DeviceNet™	NU-DN1
		EtherCAT®	NU-EC1
		CC-Link	NU-CL1

Multi-Output Units



Type	Model		Separate control outputs	Common output	Common input
	NPN output	PNP output			
Main unit	FS-MC8N	FS-MC8P	8	1	1

Optional Parts (sold separately^{*1})

Description	Model
Amplifier securing bracket (for main unit)	OP-88245
End units ^{*1} (when using expansion units) OP-26751 (Set of 2)	OP-26751
M8 connector cable 2 m 6.6'/10 m 32.8' OP-73864	2 m 6.6' type OP-73864
	10 m 32.8' type OP-73865
Expansion converter unit OP-87199	This adapter allows the FS-N40 series to connect to non-NEO type expansion units using the KEYENCE 1-Line System.

^{*}1 Multi-output units come with end units.

Network Unit Optional Parts (sold separately)

Model	Type
OP-79426	Version 1.10 supported CC-Link dedicated cable 20 m 65.6'
OP-79427	Version 1.10 supported CC-Link dedicated cable 100 m 328.1'
OP-51504	STP (Shielded twisted-pair) cable 0.2 m 0.7'
OP-51505	STP (Shielded twisted-pair) cable 0.5 m 1.6'
OP-51506	STP (Shielded twisted-pair) cable 1 m 3.3'
OP-51507	STP (Shielded twisted-pair) cable 3 m 9.8'
OP-51508	STP (Shielded twisted-pair) cable 5 m 16.4'
OP-51509	STP (Shielded twisted-pair) cable 10 m 32.8'
OP-84338^{*1}	e-CON connector (2 pieces included)

^{*}1 Use a cable with sheath outer diameter of 1.15 to 1.35 mm 0.045" to 0.053" and wire range of 0.1 to 0.5 mm² 0.000155 to 0.000775".
To connect a device using a cable other than as specified above, prepare an e-CON connector that conforms with its wire diameter.

Fiber Unit Index

Model	Page	Model	Page	Model	Page
FU-10	P29	FU-5F	P21	FU-79	P23
FU-11	P33	FU-5FZ		FU-79U	
FU-12	P24	FU-50		FU-80TZ	
FU-13	P34	FU-51TZ	P22	FU-80MTZ	
FU-15		FU-52TZ		FU-81C	P32
FU-16	P21	FU-53TZ		FU-82C	
FU-16Z		FU-54TZ		FU-83C	
FU-18		FU-55	P21	FU-84C	P24
FU-18M		FU-56	P21 · 22	FU-85A	P32
FU-20	P29	FU-56TZ	P22	FU-85H	
FU-21X	P26 · 28	FU-57TE	P23	FU-85Z	
FU-22X	P27 · 31	FU-57TZ	P22	FU-86A	P24
FU-23X	P27	FU-58	P21	FU-86H	
FU-24X	P26 · 28	FU-58U	P21 · 23	FU-86Z	
FU-25	P26	FU-59		FU-87	P32
FU-31	P30	FU-59U		FU-87K	
FU-32	P22	FU-6F	P26	FU-88	P24
FU-33	P30	FU-61		FU-88K	
FU-34	P22	FU-61Z		FU-91	P32
FU-35FA	P26 · 28 · 29	FU-63	P31	FU-92	P23
FU-35FG	P19 · 28 · 29	FU-63T		FU-93	P33
FU-35FZ	P26 · 28 · 29	FU-63Z		FU-93Z	
FU-35TG	P19 · 28 · 29	FU-65X		FU-95	
FU-35TZ	P26 · 28 · 29	FU-66	P26	FU-95HA	
FU-37	P30	FU-66TZ		FU-95S	
FU-38		FU-66Z		FU-95W	
FU-38H	P32	FU-67		FU-95Z	
FU-38K		FU-67G	P19	FU-96	P23
FU-38L	P30	FU-67MG		FU-96T	
FU-38LK	P32	FU-67MTG		FU-97P	P32
FU-38R	P30	FU-67TG		FU-97S	
FU-38S		FU-67TZ	P26	FU-98	P23
FU-38V		FU-67V		FU-A05	P24
FU-4F	P27	FU-68	P31	FU-A05D	P33
FU-4FZ		FU-69U		FU-A10	P24
FU-40	P28	FU-69X		FU-A10D	P33
FU-40G		FU-7F	P20	FU-A40	P24
FU-40S	P30	FU-70U	P23	FU-A100	
FU-41TZ		FU-70TZ	P20	FU-E11	
FU-42TZ		FU-70TU	P23	FU-E40	
FU-43	P31	FU-71	P20	FU-L50Z	P20
FU-43TZ	P30	FU-71Z		FU-L51Z	
FU-44TZ		FU-73	P22	FU-L52Z	
FU-45X	P27 · 31	FU-75F		FU-L53Z	
FU-46		FU-76F		FU-L54Z	
FU-47TZ	P30	FU-77	P20	FU-L41Z	P27
FU-48	P27 · 31	FU-77G	P19	FU-R6F	P18
FU-48U		FU-77MG		FU-R67	
FU-49U		FU-77MTG		FU-R67G	
FU-49X		FU-77TG		FU-R67TG	
<hr/>		FU-77TZ	P20	FU-R67TZ	
<hr/>		FU-77V		FU-R7F	
<hr/>		FU-78		FU-R77	
<hr/>				FU-R77G	
<hr/>				FU-R77TG	
<hr/>				FU-R77TZ	
<hr/>				FU-V7FN	P35
<hr/>				FU-V84	
<hr/>				FU-V84L	
<hr/>				FU-2303	P19 · 28 · 29
<hr/>				FU-2540	P29
<hr/>					
<hr/>		Thrubeam Lenses	P25		
<hr/>				Reflective Lenses	P28 · 29

Solve Any and All Applications



Fiber Units FU Series



Mounting/Space Constraints

Integrated Bracket Fibers

The fiber is already integrated into a L-shaped bracket for quick and painless installation.



Thrubeam Models

P20

Reflective Models

P27

Threaded and Hex-shaped Fibers

Threaded models can be easily mounted to a machine with one or two nuts. Hex-shaped model provide easy cable routing and prevent snagging.



Thrubeam Models

P20

Reflective Models

P26

Difficult Detection Targets

Long Distance Targets

By focusing the light being emitted, these fibers can see targets at distances that are too far for conventional fibers.



Thrubeam Models

P21

Reflective Models

P28

Transparent Targets

The use of a reflector allows these fibers to stably detect transparent targets with ease.



Retro-Reflective Models

P34

Demanding Environments

High Traffic/Guarded

Perfect for high traffic environments, these guarded fibers will not be damaged by crushing, pinching, or snagging.



Thrubeam Models

P19

Reflective Models

P19

Oil/Chemical Exposure

The fluorocarbon resin coating allows these fiber units to be used in locations where oil or chemical exposure is constant.



Thrubeam Models

P23

Reflective Models

P32

Flat Bracket Fibers

These low profile fibers provide a compact design and integrated mounting holes for easy installation in tight spaces.



Thrubeam Models

P22

Reflective Models

P30

Cylindrical Fibers

These fibers can fit in nearly any location and are held in place with a set screw.



Thrubeam Models

P21

Reflective Models

P27

Sleeve Type Fibers

These fibers feature a thin sleeve that can be routed into the necessary detection location, while being secured somewhere else.



Thrubeam Models


P22

Reflective Models

P30

Varied Position/Falling Targets

By looking over an area, instead of a fixed point, it is possible to detect falling targets or targets that are not in repeatable positions.

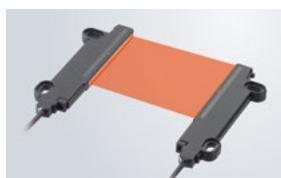

Thrubeam Models

P24

Reflective Models

P33

Small Targets

With the use of built-in or attachable lenses, the light is focused to a fine point for consistent small target detection.



Reflective Models

P28

Liquid Levels

It is possible to reliably detect liquid levels using fibers. This can be done through immersion or by attaching them to a transparent tube.



Reflective Models

P33

Robotic Arms/Constant Motion

With bend ratings of up to 50 million bends (typical value), these fibers are ideal for robotic integration or anywhere consistent bending occurs.



Thrubeam Models

P23

Reflective Models

P31

Vacuum Chambers

These specially designed fibers can be used in vacuum environments and still provide stable detection.



Thrubeam Models

P35

High Temperature Locations

Detect targets in high temperature environments with fibers that can withstand temperatures of up to 350°C 662°F.



Thrubeam Models

P24

Reflective Models









P32

Featured Fibers

NEW ACTIVE RECEIVER FIBER UNITS

Thrubeam




Threaded and Hex-Shaped Active Receiver Fibers

Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹			Optical axis diameter (mm inch)	Model Weight
Size / Shape					TERA (Longest)	Other power modes	MEGA		
M4	Hex-shaped		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +60°C (-40 to +140°F)	R2 R0.08" ToughFlex	3600 141.73" 640 25.20"	3100 122.05" 2100 82.68" 1300 51.18"	880 34.65" 320 12.60" 190 7.48"	Transmitter: ø1 ø0.04"	FU-R77TZ Approx. 25g
			1 m 3.3' Cut not allowed -40 to +60°C (-40 to +140°F)	R10 R0.39" Stainless Steel	1800 70.87" 640 25.20"	1800 70.87" 1800 70.87" 1300 51.18"	880 34.65" 320 12.60" 190 7.48"		
			2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +60°C (-40 to +140°F)	R2 R0.08" ToughFlex	3600 141.73" 880 34.65"	3600 141.73" 3000 116.11" 1800 70.87"	1300 51.18" 430 16.93" 240 9.45"		
			2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +60°C (-40 to +140°F)	R25 R0.98" ToughFlex	3600 141.73" 1100 43.31"	3600 141.73" 3200 125.98" 2200 86.61"	1500 59.06" 540 21.26" 290 11.42"		
	Threaded		1 m 3.3' Cut not allowed -40 to +60°C (-40 to +140°F)	R10 R0.39" Stainless Steel	1800 70.87" 880 34.65"	1800 70.87" 1800 70.87" 1800 70.87"	1300 51.18" 430 16.93" 240 9.45"	Receiver: ø3.2 ø0.13"	FU-R77 Approx. 21g
			1 m 3.3' Cut not allowed -40 to +60°C (-40 to +140°F)	R10 R0.39" Stainless Steel	1800 70.87" 880 34.65"	1800 70.87" 1800 70.87" 1800 70.87"	1300 51.18" 430 16.93" 240 9.45"		
			1 m 3.3' Cut not allowed -40 to +60°C (-40 to +140°F)	R10 R0.39" Stainless Steel	1800 70.87" 880 34.65"	1800 70.87" 1800 70.87" 1800 70.87"	1300 51.18" 430 16.93" 240 9.45"		
			1 m 3.3' Cut not allowed -40 to +60°C (-40 to +140°F)	R10 R0.39" Stainless Steel	1800 70.87" 880 34.65"	1800 70.87" 1800 70.87" 1800 70.87"	1300 51.18" 430 16.93" 240 9.45"		

*1 When using the FS-N40 Series. "3600 mm 141.73" (1800 mm 70.87)" is assumed as the maximum because the fiber cable length is 2 m 6.6' (1 m 3.3').

Reflective

Threaded and Hex-Shaped Active Receiver Fibers

Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹			Model Weight
Size / Shape					TERA (Longest)	Other power modes	MEGA	
M6	Hex-shaped		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +60°C (-40 to +140°F)	R2 R0.08" ToughFlex	790 31.10" 210 8.27"	710 27.95" 550 21.65" 470 18.50"	310 12.20" 90 3.54" 56 2.20"	FU-R67TZ Approx. 25g
			1 m 3.3' Cut not allowed -40 to +60°C (-40 to +140°F)	R10 R0.39" Stainless Steel	790 31.10" 210 8.27"	710 27.95" 550 21.65" 470 18.50"	310 12.20" 90 3.54" 56 2.20"	
			2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +60°C (-40 to +140°F)	R2 R0.08" ToughFlex	1100 43.31" 210 8.27"	900 35.43" 740 29.13" 490 19.29"	320 12.60" 110 4.33" 65 2.56"	
			2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +60°C (-40 to +140°F)	R25 R0.98" ToughFlex	1150 45.28" 300 11.81"	1100 43.31" 860 33.88" 570 22.44"	410 16.14" 140 5.51" 67 2.64"	
	Threaded		1 m 3.3' Cut not allowed -40 to +60°C (-40 to +140°F)	R10 R0.39" Stainless Steel	1100 43.31" 210 8.27"	900 35.43" 740 29.13" 490 19.29"	320 12.60" 110 4.33" 65 2.56"	FU-R67 Approx. 21g
			1 m 3.3' Cut not allowed -40 to +60°C (-40 to +140°F)	R10 R0.39" Stainless Steel	1100 43.31" 210 8.27"	900 35.43" 740 29.13" 490 19.29"	320 12.60" 110 4.33" 65 2.56"	
			1 m 3.3' Cut not allowed -40 to +60°C (-40 to +140°F)	R10 R0.39" Stainless Steel	1100 43.31" 210 8.27"	900 35.43" 740 29.13" 490 19.29"	320 12.60" 110 4.33" 65 2.56"	
			1 m 3.3' Cut not allowed -40 to +60°C (-40 to +140°F)	R10 R0.39" Stainless Steel	1100 43.31" 210 8.27"	900 35.43" 740 29.13" 490 19.29"	320 12.60" 110 4.33" 65 2.56"	

*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only).

ARMOR GUARDED FIBER UNITS

Thrubeam

Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹			Optical axis diameter (mm inch)	Model Weight
Size / Shape					TERA (Longest)	Other power modes	MEGA ULTRA SUPER	TURBO HSPD S-HSPD	
M4	Hex-shaped		1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R10 R0.39" Stainless Steel		1800 70.87* 1800 70.87* 1800 70.87*	1400 55.12* 430 16.93* 280 11.02*	ø1.13 ø0.04"	FU-77TG Approx. 43g
			1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R20 R0.79" Stainless Steel		1800 70.87* 1800 70.87* 1800 70.87*	1400 55.12* 430 16.93* 280 11.02*		
	Threaded		1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R10 R0.39" Stainless Steel		1800 70.87* 1800 70.87* 1800 70.87*	1400 55.12* 430 16.93* 280 11.02*		FU-77G Approx. 39g
			1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R20 R0.79" Stainless Steel		1800 70.87* 1800 70.87* 1800 70.87*	1400 55.12* 430 16.93* 280 11.02*		

*1 When using the FS-N40 Series. "3600 mm 141.73" (1800 mm 70.87)" is assumed as the maximum because the fiber cable length is 2 m 6.6' (1 m 3.3').

Reflective

Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹			Model Weight	
Size / Shape					TERA (Longest)	Other power modes	MEGA ULTRA SUPER		
M3	Threaded		1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R10 R0.39"		590 23.23* 130 5.12*	540 21.26* 420 16.54* 320 12.60*	190 7.48* 47 1.85* 28 1.10*	FU-2303 Approx. 20g
			1 m 3.3' Free-cut (ø1.3 ø0.05" x 2) spiral 30 cm 11.81" -40 to +50°C (-40 to +122°F)	R10 R0.39"		590 23.23* 130 5.12*	540 21.26* 420 16.54* 320 12.60*	190 7.48* 47 1.85* 28 1.10*	
M6	Hex-shaped		1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R10 R0.39" Stainless Steel		900 35.43* 380 14.96*	830 32.68* 730 28.74* 670 26.38*	520 20.47* 150 5.91* 89 3.50*	FU-67TG Approx. 32g
			1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R25 R0.98" Stainless Steel		900 35.43* 380 14.96*	830 32.68* 730 28.74* 670 26.38*	520 20.47* 150 5.91* 89 3.50*	
	Coaxial		1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R10 R0.39" Stainless Steel		580 22.83* 120 4.72*	530 20.87* 390 15.35* 250 9.84*	170 6.69* 45 1.77* 27 1.06*	FU-67MTG Approx. 80g
			1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R25 R0.98" Stainless Steel		580 22.83* 120 4.72*	530 20.87* 390 15.35* 250 9.84*	170 6.69* 45 1.77* 27 1.06*	
	Threaded		1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R25 R0.98" Stainless Steel		1100 43.31* 380 14.96*	1000 39.37* 830 32.68* 610 24.02*	500 19.69* 150 5.91* 88 3.46*	FU-67MG Approx. 70g
			1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R10 R0.39" Stainless Steel		1100 43.31* 380 14.96*	1000 39.37* 830 32.68* 610 24.02*	500 19.69* 150 5.91* 88 3.46*	

*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

Thrubeam

Threaded and Hex-Shaped Fibers

Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch)* ¹			Optical axis diameter (mm inch)	Model Weight
Size / Shape					TERA (Longest)	FINE (Initial)	Other power modes		
M4	Hex-shaped		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex	3600 141.73" 3000 118.11" 1900 74.80"	3600 141.73" 3000 118.11" 1900 74.80"	1400 55.12" 430 16.93" 280 11.02"	ø1.13 ø0.04"	FU-77TZ Approx. 25g
			2 m 6.6' Free-cut (ø2.3 ø0.09") -20 to +50°C (-4 to +122°F)	R1 R0.04" ToughFlex	3600 141.73" 3000 118.11" 3600 141.73"	3600 141.73" 3000 118.11" 3600 141.73"	2500 98.43" 1200 47.24" 720 28.35"	ø2.3 ø0.09"	FU-70TZ Approx. 22g
	Threaded		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +50°C (-40 to +122°F)	R0.5 R0.02" ToughFlex	3600 141.73" 3000 118.11" 1900 74.80"	3600 141.73" 3000 118.11" 1900 74.80"	1400 55.12" 430 16.93" 280 11.02"	ø1.13 ø0.04"	FU-77V Approx. 25g
			2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +70°C (-40 to +158°F)	R2 R0.08" ToughFlex	3600 141.73" 3000 118.11" 2600 102.36"	3600 141.73" 3000 118.11" 2600 102.36"	1900 74.80" 540 21.28" 310 12.20"	ø1 ø0.04"	FU-77 Approx. 21g
M6	Threaded		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +70°C (-40 to +158°F)	R25 R0.98" ToughFlex	3600 141.73" 3600 141.73" 2600 102.36"	3600 141.73" 3600 141.73" 2600 102.36"	1900 74.80" 540 21.28" 310 12.20"	ø1.5 ø0.06"	FU-71Z Approx. 25g
			2 m 6.6' Free-cut (ø2.2 ø0.09") FU-71Z: -40 to +50°C (-40 to +122°F) FU-71: -40 to +70°C (-40 to +158°F)	R4 R0.16" ToughFlex	3600 141.73" 760 29.92" Lens attachment ▶ P25	2800 110.24" 2100 82.68" 1300 51.18"	1000 39.37" 260 10.24" 180 7.09"	ø1.5 ø0.06"	FU-78 Approx. 9g
	Threaded		2 m 6.6' Free-cut (ø2.2 ø0.09") FU-71Z: -40 to +50°C (-40 to +122°F) FU-71: -40 to +70°C (-40 to +158°F)	R25 R0.98"	3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 3600 141.73" 3600 141.73"	3000 118.11" 1000 39.37" 590 23.23"	ø1.5 ø0.06"	FU-71 Approx. 25g

*1 When using the FS-N40 Series. "3600 mm 141.73" (1800 mm 70.87)" is assumed as the maximum because the fiber cable length is 2 m 6.6' (1 m 3.3').

Integrated Bracket Fibers

Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch)* ¹			Optical axis diameter (mm inch)	Model Weight
Beam emitting direction	Optical axis height				TERA (Longest)	FINE (Initial)	Other power modes		
Top	10 mm 0.39"		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex	3600 141.73" 2900 114.17" 2200 86.61" 1300 51.18"	3600 141.73" 2900 114.17" 2200 86.61" 1300 51.18"	1000 39.37" 290 11.42" 170 6.69"	ø1.13 ø0.04"	FU-L51Z Approx. 30g
	15 mm 0.59"		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +50°C (-40 to +122°F)		3600 141.73" 2900 114.17" 2200 86.61" 1300 51.18"	3600 141.73" 2900 114.17" 2200 86.61" 1300 51.18"	1000 39.37" 290 11.42" 170 6.69"	ø1.13 ø0.04"	FU-L52Z Approx. 30g
	20 mm 0.79"		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +50°C (-40 to +122°F)		3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 3600 141.73" 3600 141.73"	3000 118.11" 1000 39.37" 590 23.23"	ø1.13 ø0.04"	FU-L53Z Approx. 30g
Top (Built-in lens)	10 mm 0.39"		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex	3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 3600 141.73" 3600 141.73"	3000 118.11" 1000 39.37" 590 23.23"	ø3.5 ø0.14"	FU-L50Z Approx. 30g
Side	10 mm 0.39"		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +50°C (-40 to +122°F)		2500 98.43" 1800 70.87" 1100 43.31"	2500 98.43" 1800 70.87" 1100 43.31"	840 33.07" 270 10.63" 140 5.51"	ø1.13 ø0.04"	FU-L54Z Approx. 30g

*1 When using the FS-N40 Series. "3600 mm 141.73" is assumed as the maximum because the fiber cable length is 2 m 6.6'.

Cylindrical (Set Screw Installation Fibers)

Type Size	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹⁾			Optical axis diameter (mm inch)	Model Weight
				TERA (Longest) FINE (Initial)	Other power modes			
$\varnothing 1.0$ $\varnothing 0.04"$		1 m 3.3' Free-cut ($\varnothing 1.0 \varnothing 0.04"$) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex High-flex	800 31.50" 170 6.69"	700 27.56" 510 20.08" 360 14.17"	220 8.66" 64 2.52" 40 1.57"	$\varnothing 0.5$ $\varnothing 0.02"$	FU-58U Approx. 4g
		50 cm 19.69' Cut not allowed -40 to +50°C (-40 to +122°F)	R10 R0.39"	400 15.75" 85 3.35"	380 14.96" 270 10.63" 180 7.09"	120 4.72" 40 1.57" 23 0.91"	$\varnothing 0.265$ $\varnothing 0.01"$	FU-58 Approx. 8g
$\varnothing 1.5$ $\varnothing 0.06"$		1 m 3.3' Free-cut ($\varnothing 1.0 \varnothing 0.04"$) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex High-flex	800 31.50" 170 6.69"	700 27.56" 510 20.08" 360 14.17"	220 8.66" 64 2.52" 40 1.57"	$\varnothing 0.5$ $\varnothing 0.02"$	FU-59U Approx. 4g
		1 m 3.3' Free-cut ($\varnothing 1.0 \varnothing 0.04"$) -40 to +70°C (-40 to +158°F)	R4 R0.16" High-flex	1500 59.06" 350 13.78"	1200 47.24" 900 35.43" 600 23.62"	440 17.32" 130 5.12" 77 3.03"	$\varnothing 0.7$ $\varnothing 0.03"$	FU-59 Approx. 3g
$\varnothing 2.5$ $\varnothing 0.10"$		50 cm 19.69' Cut not allowed -40 to +70°C (-40 to +158°F)	R10 R0.39"	73 2.87" 16 0.63"	55 2.17" 41 1.61" 27 1.06"	21 0.83" 5 0.20" 2 0.08"	$\varnothing 0.125$ $\varnothing 0.005"$	FU-55 Approx. 3g
	Do not bend $\varnothing 0.25 \varnothing 0.10"$ sleeve. $\varnothing 0.3 \varnothing 0.01"$	50 cm 19.69' Cut not allowed -40 to +70°C (-40 to +158°F)						FU-56 Approx. 3g
$\varnothing 3$ $\varnothing 0.12"$		2 m 6.6' Free-cut ($\varnothing 2.2 \varnothing 0.09"$) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex	3600 141.73" 1100 43.31"	3600 141.73" 3000 118.11" 1900 74.80"	1400 55.12" 430 16.93" 280 11.02"	$\varnothing 1.13$ $\varnothing 0.04"$	FU-5FZ Approx. 19g
		2 m 6.6' Free-cut ($\varnothing 2.2 \varnothing 0.09"$) -40 to +70°C (-40 to +158°F)	R25 R0.98"	3600 141.73" 1500 59.06" 2600 102.36"	3600 141.73" 3600 141.73" 2600 114.17"	1900 74.80" 540 21.26" 310 12.20"	$\varnothing 1$ $\varnothing 0.04"$	FU-5F Approx. 19g

*1 When using the FS-N40 Series. "3600 mm 141.73"" is assumed as the maximum because the fiber cable length is 2 m 6.6'.

Focused Beam/High-Power Fibers

Type Beam emitting direction	Aperture angle	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹⁾			Optical axis diameter (mm inch)	Model Weight
					TERA (Longest) FINE (Initial)	Other power modes			
Side	Approx. 6°		2 m 6.6' Free-cut ($\varnothing 1.0 \varnothing 0.04"$) FU-16Z: -40 to +50°C (-40 to +122°F) FU-16/18: -40 to +70°C (-40 to +158°F)	R2 R0.08" ToughFlex	3600 141.73" 3600 30.55" 3600 141.73"	3600 118.11" 1300 51.18" 770 30.31"		$\varnothing 2.5$ $\varnothing 0.10"$	FU-16Z Approx. 8g
				3600 141.73" 3600 137.85" 3600 141.73"	3600 141.73" 1700 66.93" 1000 39.37"		FU-16 Approx. 8g		
	Approx. 2°			R10 R0.39"	3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 1600 62.99" 840 33.07"			FU-18 Approx. 8g
Top	Approx. 6°		2 m 6.6' Free-cut ($\varnothing 1.0 \varnothing 0.04"$) -40 to +70°C (-40 to +158°F)	R2 R0.08" ToughFlex	2200 86.61" 1500 59.06" 1100 43.31"	900 35.43" 350 13.78" 230 9.06"	$\varnothing 1$ $\varnothing 0.04"$	$\varnothing 2.8$ $\varnothing 0.11"$	FU-18M Approx. 6g
			2 m 6.6' Free-cut ($\varnothing 1.0 \varnothing 0.04"$) -40 to +50°C (-40 to +122°F)	3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 2900 114.17" 1400 55.12"		FU-50 Approx. 8g		

*1 When using the FS-N40 Series. "3600 mm 141.73"" is assumed as the maximum because the fiber cable length is 2 m 6.6'.

Thrubeam

Flat Bracket Fibers

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹⁾			Optical axis diameter (mm inch)	Model Weight
				TERA (Longest)		Other power modes		
				FINE (Initial)	MEGA ULTRA SUPER	TURBO HSPD S-HSPD		
Top	<td data-kind="parent" data-rs="4">1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +50°C (-40 to +122°F)</td> <td data-kind="parent" data-rs="4">R2 R0.08" ToughFlex</td> <td>950 37.40"</td> <td>810 31.89" 570 22.44" 370 14.57"</td> <td>270 10.63" 90 3.54" 50 1.97"</td> <td>ø0.5 ø0.02"</td> <td>FU-51TZ Approx. 5g</td>	1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex	950 37.40"	810 31.89" 570 22.44" 370 14.57"	270 10.63" 90 3.54" 50 1.97"	ø0.5 ø0.02"	FU-51TZ Approx. 5g
		3600 141.73" 1100 43.31"	3100 122.05" 1900 74.80"	1400 55.12" 420 16.84" 250 9.84"	ø1 ø0.04"	FU-52TZ Approx. 15g		
	<td data-kind="ghost"></td> <td data-kind="ghost"></td> <td>950 37.40"</td> <td>810 31.89" 570 22.44" 370 14.57"</td> <td>270 10.63" 90 3.54" 50 1.97"</td> <td>ø0.5 ø0.02"</td> <td>FU-57TZ Approx. 5g</td>			950 37.40"	810 31.89" 570 22.44" 370 14.57"	270 10.63" 90 3.54" 50 1.97"	ø0.5 ø0.02"	FU-57TZ Approx. 5g
		740 29.13" 170 6.69"	570 22.44" 400 15.75" 300 11.81"	220 8.68" 86 3.39" 39 1.54"	ø1 ø0.04"	FU-53TZ Approx. 10g		
Flat	<td data-kind="parent" data-rs="2">1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +50°C (-40 to +122°F)</td> <td data-kind="parent" data-rs="2">R2 R0.08" ToughFlex</td> <td>3600 141.73" 1100 43.31"</td> <td>3100 51.18" 2700 106.30" 1800 70.87"</td> <td>400 15.75" 240 9.45"</td> <td>ø1 ø0.04"</td> <td>FU-54TZ Approx. 25g</td>	1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex	3600 141.73" 1100 43.31"	3100 51.18" 2700 106.30" 1800 70.87"	400 15.75" 240 9.45"	ø1 ø0.04"	FU-54TZ Approx. 25g
		3200 125.98" 2500 98.43" 1500 59.06"	1100 43.31" 400 15.75" 240 9.45"	ø1.13 ø0.04"	ø1.13 ø0.04"	FU-56TZ Approx. 20g		

*1 When using the FS-N40 Series. "3600 mm 141.73" is the maximum because the fiber cable length is 2 m 6.6'.

Sleeve Type Fibers

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹⁾			Optical axis diameter (mm inch)	Model Weight
				TERA (Longest)		Other power modes		
				FINE (Initial)	MEGA ULTRA SUPER	TURBO HSPD S-HSPD		
Side	<td data-kind="parent" data-rs="2">1 m 3.3' Free-cut (ø1.3 ø0.05") -40 to +70°C (-40 to +158°F)</td> <td data-kind="parent" data-rs="4">R25 R0.98"</td> <td>690 27.17" 140 5.51"</td> <td>540 21.66" 420 16.54" 280 11.02"</td> <td>180 7.09" 56 2.20" 32 1.26"</td> <td>ø0.6 ø0.02"</td> <td>FU-32 Approx. 5g</td>	1 m 3.3' Free-cut (ø1.3 ø0.05") -40 to +70°C (-40 to +158°F)	R25 R0.98"	690 27.17" 140 5.51"	540 21.66" 420 16.54" 280 11.02"	180 7.09" 56 2.20" 32 1.26"	ø0.6 ø0.02"	FU-32 Approx. 5g
		2800 110.24" 610 24.02"	2200 86.61" 1700 66.93" 1100 43.31"	770 30.31" 190 7.48" 120 4.72"	ø1 ø0.04"	FU-34 Approx. 17g		
	<td data-kind="parent" data-rs="2">2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +70°C (-40 to +158°F)</td> <td data-kind="ghost"></td> <td>3600 141.73" 1400 55.12"</td> <td>3600 141.73" 1400 55.12"</td> <td>1800 70.87" 540 21.26" 320 12.99"</td> <td>ø1 ø0.04"</td> <td>FU-73 Approx. 24g</td>	2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +70°C (-40 to +158°F)		3600 141.73" 1400 55.12"	3600 141.73" 1400 55.12"	1800 70.87" 540 21.26" 320 12.99"	ø1 ø0.04"	FU-73 Approx. 24g
		390 15.35" 85 3.35"	370 14.57" 260 10.24" 180 7.09"	120 4.72" 40 1.57" 20 0.79"	ø0.265 ø0.01"	FU-75F Approx. 10g		
Top	<td data-kind="parent" data-rs="2">1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +70°C (-40 to +158°F)</td> <td data-kind="parent" data-rs="2">R10 R0.39"</td> <td>1100 43.31" 310 12.20"</td> <td>850 33.46" 570 22.44"</td> <td>400 15.75" 120 4.72" 90 3.54"</td> <td>ø0.5 ø0.02"</td> <td>FU-76F Approx. 10g</td>	1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +70°C (-40 to +158°F)	R10 R0.39"	1100 43.31" 310 12.20"	850 33.46" 570 22.44"	400 15.75" 120 4.72" 90 3.54"	ø0.5 ø0.02"	FU-76F Approx. 10g
		73 2.87" 16 0.63"	55 2.17" 41 1.61" 27 1.06"	21 0.83" 5 0.20" 2 0.08"	ø0.125 ø0.005"	FU-56 Approx. 3g		

*1 When using the FS-N40 Series. "3600 mm 141.73" is the maximum because the fiber cable length is 2 m 6.6'.

Oil/Chemical Resistant Fibers

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹⁾			Optical axis diameter (mm inch)	Model Weight	
				TERA (Longest)	Other power modes	MEGA ULTRA SUPER	TURBO HSPD S-HSPD		
Top		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +70°C (-40 to +158°F)	R40 R1.57"		3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 2400 94.49" 1500 59.06"	ø3.7 ø0.15"	FU-92 Approx. 71g
		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +70°C (-40 to +158°F)			3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 1900 74.80"	ø6 ø0.24"	FU-98 Approx. 70g
Side		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +70°C (-40 to +158°F)	R25 ² R0.98"		3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 3600 141.73" 3600 141.73"	3100 122.05" 860 33.66" 570 22.44"	ø2.8 ø0.11"	FU-96 Approx. 71g
		2 m 6.6' Free-cut (ø2.2 ø0.09") 0 to +60°C (0 to +140°F)			3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 2400 94.49"	ø3.7 ø0.15"	FU-96T Approx. 35g
Side (oil resistant)		2 m 6.6' Free-cut (ø2.2 ø0.09") -20 to +100°C (-4 to +212°F)	R2 R0.08"		3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 3600 141.73" 3600 141.73"	2500 98.43" 1000 39.37" 790 31.10"	ø2.3 ø0.09"	FU-80TZ Approx. 30g
		2 m 6.6' Free-cut (ø2.2 ø0.09") -20 to +100°C (-4 to +212°F)			3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 2900 114.17"	ø4.3 ø0.17"	FU-80MTZ Approx. 55g

*1 When using the FS-N40 Series. "3600 mm 141.73" is assumed as the maximum because the fiber cable length is 2 m 6.6'.

*2 Fibers cannot be bent within 25 mm 0.98" of the end of the case screw cap.

High-Flex Fibers (Repeated Bending Fibers)

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹⁾			Optical axis diameter (mm inch)	Model Weight	
				TERA (Longest)	Other power modes	MEGA ULTRA SUPER			
ø1.0 ø0.04"		1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +50°C (-40 to +122°F)	R2 R0.08"		800 31.50" 170 6.69"	700 27.56" 510 20.08" 360 14.17"	220 5.66" 64 2.52" 40 1.57"	ø0.5 ø0.02"	FU-58U Approx. 4g
		1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +50°C (-40 to +122°F)			1800 70.87" 1200 47.24" 1800 70.87"	1400 55.12" 420 16.54" 240 9.45"	ø2.3 ø0.09"		
M3		1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +50°C (-40 to +122°F)	ToughFlex High-flex		1200 47.24" 900 35.43" 600 23.62"	1400 55.12" 410 16.14" 210 8.26"	ø2.3 ø0.09"	FU-79U Approx. 4g	
		1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +50°C (-40 to +122°F)			1500 59.06" 1200 47.24" 1000 39.37"	440 17.32" 130 5.12" 77 3.03"	ø2.3 ø0.09"		FU-70U Approx. 5g
ø1.5 ø0.06"		1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +70°C (-40 to +158°F)	R4 R0.16"		1500 59.06" 1200 47.24" 900 35.43"	820 32.28" 610 24.02" 410 16.14"	300 11.81" 90 3.54" 58 2.28"	ø0.7 ø0.03"	FU-59 Approx. 3g
		1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +70°C (-40 to +158°F)			350 13.78"	600 23.62"			
6 × 10.5 × 2.5 0.24" × 0.41" × 0.10"		1 m 3.3' Free-cut (ø1.0 ø0.04") -40 to +70°C (-40 to +158°F)	R4 R0.16"		1000 39.37" 200 7.87"	820 32.28" 610 24.02" 410 16.14"	300 11.81" 90 3.54" 58 2.28"	ø0.7 ø0.03"	FU-57TE Approx. 5g

*1 When using the FS-N40 Series. "3600 mm 141.73" (1800 mm 70.87)" is assumed as the maximum because the fiber cable length is 2 m 6.6' (1 m 3.3').

Thrubeam

Heat Resistant Fibers

Type Heat resistant temperatures ²	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹			Optical axis diameter (mm inch)	Model Weight
				TERA (Longest)		Other power modes		
				MEGA	ULTRA	SUPER		
100°C ³ (212°F)		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +100°C (-40 to +212°F)	R5 R0.20" ToughFlex	 3600 141.73" 1200 4724" Lens attachment ▶ P25	3600 141.73" 3600 141.73" 2100 82.68" 280 11.02"	1500 59.06" 460 18.11" 280 11.02"	ø1 ø0.04"	FU-86Z Approx. 25g
105°C ³ (221°F)		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +105°C (-40 to +221°F)	R25 R0.98"	 3600 141.73" 1400 55.12" Lens attachment ▶ P25	3600 141.73" 3600 141.73" 2600 102.36"	1900 74.80" 540 21.26" 320 12.60"		FU-86A Approx. 22g
150°C ⁴ (302°F)		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +150°C (-40 to +302°F)	R20 R0.79"	 3600 141.73" 620 24.41"	3200 125.98" 2100 82.68" 1300 51.18"	860 33.96" 400 15.15" 230 9.06"	ø1.5 ø0.06"	FU-86H Approx. 35g
180°C ⁵ (356°F)		2 m 6.6' Free-cut (ø2.2 ø0.09") -60 to +180°C (-76 to +356°F)	R35 R1.38"	 3600 141.73" 680 25.77"	3200 125.98" 2200 86.61" 1400 55.12"	940 37.01" 450 17.72" 260 10.24"		FU-88 Approx. 36g
200°C (392°F)		2m 6.6' Cut not allowed -40 to +200°C (-40 to +392°F)	R8 R0.31"	 2900 114.17"	2100 82.68" 1500 59.06" 1100 43.31"	810 31.89" 300 11.81" 170 6.69"	ø1 ø0.04"	FU-88K Approx. 30g
300°C (572°F)		2m 6.6' Cut not allowed -40 to +300°C (-40 to +572°F)	R25 R0.98"	 460 18.11"	Lens attachment ▶ P25			FU-84C Approx. 66g

*1 When using the FS-N40 Series, "3600 mm 141.73" is assumed as the maximum because the fiber cable length is 2 m 6.6".

*2 Use the fiber sensor under dry conditions. Allow some margin for the temperature upper limit when selecting a heat-resistant fiber unit.

*3 The recommended maximum ambient temperature during operation is 90°C (194°F) when constantly using the fiber unit in a high-temperature environment.

*4 The recommended maximum ambient temperature during operation is 130°C (266°F) when constantly using the fiber unit in a high-temperature environment.

*5 The recommended maximum ambient temperature during operation is 150°C (302°F) when constantly using the fiber unit in a high-temperature environment.

Area/Array Fibers

Type Detecting method	Optical axis width	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹			Optical axis diameter (mm inch)	Model Weight
					TERA (Longest)		Other power modes		
					MEGA	ULTRA	SUPER		
Array	5 mm 0.20"		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +70°C (-40 to +158°F)	R4 ² R0.16"	 3600 141.73"	3600 141.73"	910 35.83"	Approx. 6 x 0.3 0.24" x 0.01"	FU-A05 Approx. 20g
	10 mm 0.39"		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +70°C (-40 to +158°F)		 810 31.89"	810 31.89"	340 13.39" 1400 55.12"	Approx. 11 x 0.3 0.43" x 0.01"	FU-A10 Approx. 20g
	40 mm 1.57"		2 m 6.6' Free-cut (not including the 50 mm 1.97" spiral section) -20 to +50°C (-4 to +122°F)	R10 R0.39"	 3600 141.73"	3600 141.73" 3200 125.98" 2100 82.68"	1500 59.06" 610 24.02" 350 13.78"	Approx. 40 x 0.25 1.57" x 0.01"	FU-A40 Approx. 70g
	100 mm 3.94"		2 m 6.6' Free-cut (not including the 50 mm 1.97" spiral section) -20 to +50°C (-4 to +122°F)		 3600 141.73"	3600 141.73" 3200 125.98" 2000 78.74"	1400 55.12" 540 21.26" 310 12.20"	Approx. 100 x 0.25 3.94" x 0.01"	FU-A100 Approx. 110g
Area	10 mm 0.39"		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex	 3600 141.73"	3600 141.73" 3600 141.73" 3600 141.73"	2800 110.24" 1000 39.37" 580 22.83"	10 x 3 0.39" x 0.12" (With 1.0 mm 0.04" wide slit)	FU-12 Approx. 23g
	11 mm 0.43"		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +50°C (-40 to +122°F)		 3600 141.73"	3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 2200 86.61" 1200 47.24"	11 x 2 0.43" x 0.08" (With 0.5 mm / 1.0 mm 0.02"/0.04" wide slit)	FU-E11 Approx. 20g
	40 mm 1.57"		2 m 6.6' Free-cut (ø2.2 ø0.09") -40 to +50°C (-40 to +122°F)		 3600 141.73"	3600 141.73" 3600 141.73" 3600 141.73"	3600 141.73" 3600 141.73" 3600 141.73"	40 x 3 1.57" x 0.12" (0.5 x 20 mm 0.02" x 0.79" / 0.5 x 30 mm 0.02" x 1.18" slit options available)	FU-E40 Approx. 30g

*1 When using the FS-N40 Series, "3600 mm 141.73" is assumed as the maximum because the fiber cable length is 2 m 6.6".

*2 R10 R0.39" for the first 10 mm 0.39" of cable from the housing.

Detecting Distances Using Thrubeam Lenses

Type	Appearance (mm inch)	Ambient temperature	Model Weight	Applicable fiber units	Detecting distance (mm inch) ¹						
					TERA	MEGA	ULTRA	SUPER	TURBO	FINE	HSPD
Ultra-long detecting distance Aperture Angle: Approx. 8°	 Tip: ø4.3 ø0.17"	-40 to +70°C (-40 to +158°F)	F-4 Approx. 1g	FU-77TZ/77V/77	3600 141.73"					2700 106.30"	1700 66.93"
				FU-7F	3600 141.73"					3200 125.98"	2000 78.74"
				FU-78	3600 141.73"					2500 98.43"	1400 55.12"
				FU-77G/77TG/77MG/77MTG	1800 70.87"					1700 66.93"	
Long-detecting distance Aperture Angle: Approx. 15°	 Tip: ø4 ø0.16"	-40 to +300°C (-40 to +572°F)	F-2 Approx. 2g	FU-77TZ/77V/77/84C/88K	3600 141.73"					2100 82.68"	1100 43.31"
				FU-7F/86A	3600 141.73"					2500 98.43"	1400 55.12"
				FU-86Z	3600 141.73"					1900 74.80"	1000 39.37"
				FU-78	3600 141.73"					1600 62.99"	900 35.43"
				FU-77G/77TG/77MG/77MTG	1800 70.87"					1100 43.31"	
Side-view with mounting holes	 Fixing Nut 9.3 0.37", 16.7 0.22", 5.6 0.66"	-40 to +105°C (-40 to +221°F)	F-5 Approx. 10g	FU-77V/77	3600 141.73"					2600 102.36"	1600 62.99"
				FU-7F/86A	3600 141.73"					3100 122.05"	1900 74.80"
				FU-86Z	3600 141.73"					2900 114.17"	1800 70.87"
				FU-78	3600 141.73"					2300 90.55"	1300 51.18"
				FU-77G/77MG	1800 70.87"					1600 62.99"	
Side-view	 Tip: ø4 ø0.16"	-40 to +70°C ² (-40 to +158°F)	F-1 Approx. 2g	FU-77V/77	3600 141.73"	3200 125.98"	2200 86.61"	1600 62.99"	530 20.87"	300 11.81"	
				FU-77G/77MG	1800 70.87"				1600 62.99"	530 20.87"	300 11.81"
				FU-7F/86A	3600 141.73"		2700 106.30"	2300 90.55"	630 24.80"	370 14.57"	
				FU-86Z	3600 141.73"		2400 94.49"	2000 78.74"	590 23.23"	350 13.78"	
				FU-78/84C/88K	3600 141.73"	3000 118.11"	1900 74.80"	1300 51.18"	960 37.80"	360 14.17"	200 7.87"

*1 The maximum sensing distance of 3600 mm **141.73"** (1800 mm **70.87"**) is possible because the fiber length on one side is 2 m **6.6'** (1 m **3.33**).

*2 When using the F-1 at a temperature of 70°C (**158°F**) or more, specify the "Heat-resistant F-1".

Slit For FU-E40 (Sold Separately)











Slit Type	With OP-84365 attached	With OP-84366 attached
Optical Axis Size	30 × 0.5 mm 1.18" × 0.02"	20 × 0.5 mm 0.79" × 0.02"
Detecting distance for each power mode (mm inch) ¹	TERA	3600 141.73"
	MEGA	3600 141.73"
	ULTRA	3500 137.80"
	SUPER	1500 59.06"
	TURBO	760 29.92"
	FINE	460 18.11"
	HSPD	160 6.30"
	S-HSPD	80 3.15"
Slit weight (transmitter/receiver set)	Approx. 4g	

*1 When using the FS-N40 Series. "3600 mm **141.73"**" is assumed as the maximum because the fiber cable length is 2 m **6.6'**.



Reflective

Threaded and Hex-Shaped Fibers

Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹			Model Weight	
Size / Shape	Detecting arrangement				TERA (Longest)	Other power modes	MEGA ULTRA SUPER		
M3	Hex-shaped	Coaxial		1 m 3.3' Free-cut (ø1.3 ø0.05" x 2) -40 to +50°C (-40 to +122°F)	R2 R0.08"	 580 22.83" 120 4.72"	530 20.87" 390 15.35" 250 9.84"	170 6.69" 45 1.77" 27 1.06"	FU-35TZ Approx. 7g
				1 m 3.3' Free-cut (ø1.3 ø0.05" x 2) -40 to +50°C (-40 to +122°F)	ToughFlex	 590 23.23" 130 5.12"	540 21.26" 420 16.54" 320 12.60"	190 7.48" 47 1.85" 28 1.10"	FU-35FZ Approx. 6g
		Threaded		1 m 3.3' Free-cut (ø1.3 ø0.05" x 2) -40 to +70°C (-40 to +158°F)	R25 R0.98"	 1000 39.37" 200 7.87"	780 30.71" 600 23.62" 420 16.54"	270 10.63" 76 2.99" 49 1.93"	FU-35FA Approx. 6g
				50 cm 19.69" Cut not allowed FU-21X : -40 to +70°C (-40 to +158°F) FU-24X : -40 to +50°C (-40 to +122°F)	R10 R0.39"	 300 11.81" 63 2.48"	220 8.66" 150 5.91" 91 3.58"	68 2.68" 23 0.91" 15 0.59"	FU-21X Approx. 4g
	Hex-shaped	Parallel		2 m 6.6' Free-cut (ø1.3 ø0.05" x 2) -40 to +50°C (-40 to +122°F)	R2 R0.08"	 800 31.50" 250 9.84"	750 29.53" 660 25.98" 460 18.11"	370 14.57" 100 3.94" 60 2.36"	FU-66TZ Approx. 10g
				2 m 6.6' Free-cut (ø1.3 ø0.05" x 2) FU-66Z : -40 to +50°C (-40 to +122°F) FU-66 : -40 to +70°C (-40 to +158°F)	ToughFlex	 1200 47.24" 340 13.39"	1000 39.37" 750 29.53" 550 21.65"	430 16.93" 110 4.33" 66 2.80"	FU-66Z Approx. 10g
		Threaded		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +50°C (-40 to +122°F)	R25 R0.98"	 1400 55.12" 470 18.50"	1100 43.31" 900 35.43" 690 27.17"	550 21.65" 200 7.87" 120 4.72"	FU-66 Approx. 10g
				2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +50°C (-40 to +122°F)	R2 R0.08"	 900 35.43" 380 14.96"	830 32.68" 730 28.74" 670 26.38"	520 20.47" 150 5.91" 89 3.50"	FU-67TZ Approx. 25g
M6	Hex-shaped	Parallel		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +50°C (-40 to +122°F)	R0.5 R0.02"	 1100 43.31" 380 14.96"	1000 39.37" 830 32.68" 610 24.02"	500 19.69" 150 5.91" 88 3.46"	FU-67V Approx. 25g
				2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +50°C (-40 to +122°F)	R2 R0.08"	 1500 59.06" 550 21.65"	1300 51.18" 1100 43.31" 780 30.71"	640 25.20" 230 9.06" 140 5.51"	FU-61Z Approx. 22g
		Threaded		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +50°C (-40 to +122°F)	ToughFlex	 1100 43.31" 380 14.96"	1000 39.37" 830 32.68" 610 24.02"	500 19.69" 150 5.91" 88 3.46"	FU-67 Approx. 21g
				2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C (-40 to +158°F)	R25 R0.98"	 2400 94.49" 600 23.62"	2200 86.61" 1300 51.18" 1000 39.37"	680 26.77" 270 10.63" 180 7.09"	FU-61 Approx. 21g
	Coaxial	Parallel		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C (-40 to +158°F)	R25 R0.98"	 1400 55.12" 480 18.90"	1200 47.24" 1000 39.37" 780 30.71"	550 21.65" 220 8.66" 130 5.12"	FU-6F Approx. 21g
				2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C (-40 to +158°F)		 790 31.10" 290 11.42"	780 30.71" 750 29.53" 680 26.77"	450 17.72" 210 8.27" 120 4.72"	FU-25 Approx. 18g

¹ When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

Cylindrical (Set Screw Installation Fibers)

Type Size	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹			Model Weight
				TERA (Longest)		Other power modes	
				MEGA ULTRA SUPER	TURBO HSPD S-HSPD		
$\varnothing 1.5$ $\varnothing 0.06^*$		1 m 3.3' Cut not allowed -40 to +70°C (-40 to +158°F)	R4 R0.16" High-flex	■ 280 11.02" 59 2.32"	250 9.84" 170 6.69" 130 5.12"	91 3.58" 25 0.98" 14 0.55"	FU-49X Approx. 3g
		1 m 3.3' Cut not allowed -40 to +70°C (-40 to +158°F)	R10 R0.39"	■ 64 2.52" 8 0.31"	46 1.81" 30 1.18" 22 0.87"	14 0.55" 3 0.12" 1 0.04"	FU-46 Approx. 2g
$\varnothing 2$ $\varnothing 0.08^*$		1 m 3.3' Free-cut (Ø1.0 Ø0.04" × 2) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex High-flex	■ 290 11.42" 59 2.32"	220 8.66" 180 7.03" 110 4.33"	80 3.15" 21 0.83" 12 0.47"	FU-49U Approx. 4g
$\varnothing 2.5$ $\varnothing 0.10^*$		50 cm 19.69" Cut not allowed -40 to +70°C (-40 to +158°F)	R25 R0.98"	■ 160 6.30" 42 1.65"	120 4.72" 100 3.94" 76 2.99"	54 2.13" 20 0.79" 11 0.43"	FU-22X Approx. 4g
$\varnothing 3$ $\varnothing 0.12^*$		2 m 6.6' Free-cut (Ø1.3 Ø0.05" × 2) FU-4FZ: -40 to +50°C (-40 to +122°F) FU-4F: -40 to +70°C (-40 to +158°F)	R2 R0.08" ToughFlex		1000 39.37" 750 29.53" 550 21.65"	430 16.93" 110 4.33" 68 2.60"	FU-4FZ Approx. 8g
		1 m 3.3' Free-cut (Ø1.0 Ø0.04" × 2) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex High-flex	■ 290 11.42" 59 2.32"	1100 43.31" 900 35.43" 690 27.17"	550 21.65" 200 7.87" 120 4.72"	FU-4F Approx. 8g
		2 m 6.6' Free-cut (Ø1.0 Ø0.04" × 2) -40 to +70°C (-40 to +158°F)	R4 R0.16" High-flex	■ 500 19.69" 90 3.54"	350 13.78" 270 10.63" 190 7.48"	120 4.72" 32 1.26" 18 0.71"	FU-48 Approx. 7g
		50 cm 19.69" Cut not allowed -40 to +70°C (-40 to +158°F)	R25 R0.98"		830 32.68" 730 28.74" 660 25.98"	540 21.26" 220 8.66" 180 7.09"	FU-23X Approx. 4g
		50 cm 19.69" Cut not allowed -40 to +70°C (-40 to +158°F)	R4 R0.16"	■ 120 4.72" 33 1.30"	100 3.94" 83 3.27" 68 2.68"	46 1.81" 11 0.43" 6 0.24"	FU-45X Approx. 4g

*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)



Integrated Bracket Fibers

Type Beam emitting direction	Optical axis height	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹			Model Weight
					TERA (Longest)		Other power modes	
					MEGA ULTRA SUPER	TURBO HSPD S-HSPD		
Top	10 mm 0.39"		2 m 6.6' Free-cut (Ø2.2 Ø0.09") -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex		1000 39.37" 780 30.71" 580 22.83"	470 18.50" 150 5.91" 90 3.54"	FU-L41Z Approx. 25g

*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

Reflective

Focused Beam/High-Power Fibers

Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch)*1			Model Weight
Beam emitting direction	Aperture angle				TERA (Longest) FINE (Initial)	Other power modes	MEGA ULTRA SUPER	
Top	Approx. 8°	 Thickness: 5.2 ± 0.20 mm Height: 21.083 in	2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex	 30 to 2700 1.18" to 105.30"	30 to 2400 1.18" to 94.49"	30 to 690 1.18" to 27.17"	FU-40 Approx. 23g
		 Thickness: 5.2 ± 0.20 mm Height: 21.083 in	1 m 3.3' Cut not allowed -40 to +50°C (-40 to +122°F)	R10 R0.39" Stainless Steel	 30 to 530 1.18" to 20.87"	30 to 1200 1.18" to 47.24"	30 to 220 1.18" to 8.66"	FU-40G Approx. 50g

*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

Small Spot Reflective Fibers

Lens Attachment (Small Spot) + Fiber Unit


Type	Beam spot diameter (mm inch)	Focal distance (mm inch)	Lens Attachment			Fiber Unit						
			Appearance (mm inch)	Ambient temperature Weight	Model	Appearance	Minimum bend radius (mm inch)	Model				
Small Spot	Approx. ø0.1 ø0.004"	 7±2 0.28±0.08"	 Tip: ø7.4 ø0.29"	-30 to +70°C (-22 to +158°F) Approx. 1g	 R2 R0.08" ToughFlex	R10 R0.39"	FU-24X					
	Approx. ø0.2 ø0.01"					 R25 R0.98"		FU-21X				
	Approx. ø0.4 ø0.02"					 R2 R0.08" ToughFlex		FU-35FZ				
	Approx. ø0.5 ø0.02"					 R10 R0.39" Stainless Steel		FU-35FG/ 2303				
						 R25 R0.98"		FU-35FA				
						 R2 R0.08" ToughFlex		FU-35TZ				
						 R10 R0.39" Stainless Steel		FU-35TG				
						 R2 R0.08" ToughFlex		FU-35FZ				
						 R10 R0.39" Stainless Steel		FU-35FG/ 2303				
	Approx. ø1.0 ø0.04"	 35±3 1.38±0.12"	 Tip: ø10.6 ø0.42"	-40 to +70°C (-40 to +158°F) Approx. 5g	 R25 R0.98"	FU-21X						
	Approx. ø2.0 ø0.08"					 R2 R0.08" ToughFlex	FU-35FZ					
	 R10 R0.39" Stainless Steel					FU-35FG/ 2303						
	 R2 R0.08" ToughFlex					FU-35TZ						
	 R25 R0.98"					FU-35FA						

Lens Attachment (Parallel Beam) + Fiber Unit

Type	Beam spot diameter (mm inch)	Lens Attachment			Fiber Unit			Detecting distance (mm inch) ¹⁾		
		Appearance (mm inch)	Ambient temperature Weight	Model	Appearance	Minimum bend radius (mm inch)	Model	TERA (Longest)	FINE (Initial)	Other power modes
Parallel Beam Spot	Approx. ø4 ø0.16" (within the detecting range of 0 to 20 mm 0 to 0.79")	 Tip: ø4.3 ø0.17"	-30 to +70°C (-22 to +158°F) Approx. 2g	F-3HA	R2 R0.08" ToughFlex	FU-35FZ	76 2.99"	76 2.99"	68 2.68"	MEGA
					R10 R0.39" Stainless Steel	FU-35FG/2303	66 2.60"	76 2.99"	32 1.26"	ULTRA
					R25 R0.98"	FU-35FA	100 3.94"	100 3.94"	100 3.94"	SUPER
					R2 R0.08" ToughFlex	FU-35TZ	68 2.68"	68 2.68"	54 2.13"	HSPD
					R10 R0.39" Stainless Steel	FU-35TG	50 1.97"	68 2.68"	39 1.54"	S-HSPD
								68 2.68"	30 1.18"	


*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

Lens Attachment (Variable Beam Spot Sizes)

Type	Beam spot diameter (mm inch)	Focal distance (mm inch)	Lens Attachment			Fiber Unit		
			Appearance (mm inch)	Ambient temperature Weight	Model	Appearance	Minimum bend radius (mm inch)	Model
Side-view adjustable spot	ø0.5 to 3 ø0.02" to ø0.12"	8 to 30 0.31" to ø1.18"	 ø0.5 to 3 ø0.02" to ø0.12" 8 to 30 0.31" to ø1.18"	-30 to +70°C (-22 to +158°F) Approx. 2g	F-5HA	R2 R0.08" ToughFlex	FU-35FZ	
						R10 R0.39" Stainless Steel	FU-35FG/2303	
						R25 R0.98"	FU-35FA	

F-5HA+FU-35FZ

Target width vs. operating range (Typical)

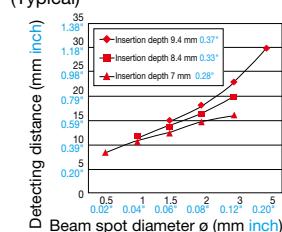


Built-In Lens Variable Beam Spot

Type	Beam spot diameter (mm inch)	Focal distance (mm inch)	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Model	Weight	Minimum bend radius (mm inch)
Adjustable beam spot	ø0.9 to 3.5 ø0.04" to ø0.14"	10 to 30 0.39" to 1.18"	M6	2 m 6.6' Free-cut (ø1.3 ø0.05" x 2) -40 to +70°C (-40 to +158°F)	FU-10	Approx. 5g	R25 R0.98"
			M6	2 m 6.6' Cut not allowed -40 to +70°C (-40 to +158°F)	FU-2540	Approx. 30g	R25 R0.98"

FU-10

Adjustable range of spot diameter (Typical)

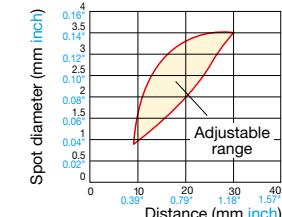

Ultra-Small Beam Spot

Type	Beam spot diameter (mm inch)	Focal distance (mm inch)	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Model	Weight	Minimum bend radius (mm inch)
Small Spot	Approx. ø0.1 ø0.004"	5 0.20"	Tip: ø3 ø0.12"	50 cm 19.69" Cut not allowed -40 to +70°C (-40 to +158°F)	FU-20	Approx. 2g	R25 R0.98"

* Cannot be used with the FS-N40 Series in S-HSPD/HSPD mode.

Reflective

Definite-Reflective Fibers

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch)*			Beam spot diameter (mm inch)	Model Weight	
				TERA (Longest) FINE (Initial)	Other power modes				
					MEGA ULTRA SUPER	TURBO HSPD S-HSPD			
Top		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C (-40 to +158°F)	R25 R0.98"	■ 15 to 150 0.59" to 5.91" ■ 15 to 55 0.59" to 2.17"	15 to 110 0.59" to 4.33" 15 to 100 0.59" to 3.94" 15 to 76 0.59" to 2.99" 15 to 27 0.59" to 1.06"		—	FU-40S Approx. 25g	
Side		2 m 6.6' Free-cut (ø1.0 ø0.04" x 2) -40 to +70°C (-40 to +158°F)	R10 R0.39"	3 0.12" center of detecting distance 3 0.12" center of detecting distance	3 0.12" center of detecting distance 3 0.12" center of detecting distance	3 0.12" center of detecting distance 3 0.12" center of detecting distance	Approx. 4.5 0.18" ↔ Approx. 3.5 0.14" (At distance of 3 0.12")	FU-37 Approx. 6g	
Flat		2 m 6.6' Free-cut (ø1.0 ø0.04" x 2) -40 to +70°C (-40 to +158°F)		6 0.24" center of detecting distance 6 0.24" center of detecting distance	6 0.24" center of detecting distance 6 0.24" center of detecting distance 6 0.24" center of detecting distance	6 0.24" center of detecting distance 6 0.24" center of detecting distance 6 0.24" center of detecting distance	Approx. ø1.5 ø0.06" (At distance of 6 0.24")	FU-38 Approx. 5g	
		2 m 6.6' Free-cut (ø1.0 ø0.04" x 2) -40 to +70°C (-40 to +158°F)		0 to 4 0" to 0.16" 0 to 4 0" to 0.16"	0 to 4 0" to 0.16" 0 to 4 0" to 0.16" 0 to 4 0" to 0.16"	0 to 4 0" to 0.16" 0 to 4 0" to 0.16" 0 to 4 0" to 0.16"	—	FU-38V Approx. 5g	
		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +60°C (-40 to +140°F)		R25 R0.98"	■ 8 to 89 0.31" to 3.50" ■ 8 to 54 0.31" to 2.13"	8 to 64 0.31" to 2.52" 8 to 61 0.31" to 2.40" 8 to 59 0.31" to 2.02"	8 to 57 0.31" to 2.24" 8 to 36 0.31" to 1.42" 10 to 26 0.39" to 1.02"	—	FU-38L Approx. 20g
		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C (-40 to +158°F)		R5 R0.20"	0 to 25 0" to 0.98" 0 to 25 0" to 0.98"	0 to 25 0" to 0.98" 0 to 25 0" to 0.98" 0 to 25 0" to 0.98"	0 to 25 0" to 0.98" 0 to 25 0" to 0.98" 0 to 25 0" to 0.98"	—	FU-38S Approx. 20g
		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C (-40 to +158°F)		R25 R0.98"	0 to 14 0" to 0.55" 0 to 14 0" to 0.55"	0 to 14 0" to 0.55" 0 to 14 0" to 0.55" 0 to 14 0" to 0.55"	0 to 14 0" to 0.55" 0 to 14 0" to 0.55" 0 to 14 0" to 0.55"	—	FU-38R Approx. 20g

*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

Flat Bracket Fibers








Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch)*			Model Weight
				TERA (Longest) FINE (Initial)	Other power modes		
					MEGA ULTRA SUPER	TURBO HSPD S-HSPD	
Top		1 m 3.3' Free-cut (ø1.0 ø0.04" x 2) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex	■ 1 to 370 0.04" to 14.57" ■ 1 to 66 0.04" to 2.60"	1 to 270 0.04" to 10.63" 1 to 200 0.04" to 7.87" 1 to 130 0.04" to 5.12"	1 to 100 0.04" to 3.94" 1 to 22 0.04" to 0.87" 1 to 10 0.04" to 0.39"	FU-44TZ Approx. 3g
Side		1 m 3.3' Free-cut (ø1.0 ø0.04" x 2) -40 to +50°C (-40 to +122°F)		■ 1 to 370 0.04" to 14.57" ■ 1 to 66 0.04" to 2.60"	1 to 270 0.04" to 10.63" 1 to 200 0.04" to 7.87" 1 to 130 0.04" to 5.12"	1 to 100 0.04" to 3.94" 1 to 22 0.04" to 0.87" 1 to 10 0.04" to 0.39"	FU-47TZ Approx. 4g
Flat		1 m 3.3' Free-cut (ø1.0 ø0.04" x 2) -40 to +50°C (-40 to +122°F)		■ 2 to 180 0.08" to 7.09" ■ 2 to 42 0.08" to 1.65"	2 to 150 0.08" to 5.91" 2 to 110 0.08" to 4.33" 2 to 74 0.08" to 2.91"	2 to 52 0.08" to 2.05" 2 to 33 0.08" to 0.51" 2 to 4 0.08" to 0.16"	FU-41TZ Approx. 5g
		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +50°C (-40 to +122°F)		■ 1 to 1000 0.04" to 39.37" ■ 1 to 120 0.04" to 4.72"	1 to 820 0.04" to 32.28" 1 to 540 0.04" to 21.25" 1 to 320 0.04" to 12.67"	1 to 220 0.04" to 8.65" 1 to 85 0.04" to 3.35" 1 to 79 0.04" to 3.11"	FU-42TZ Approx. 24g
		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +50°C (-40 to +122°F)		■ 1 to 1000 0.04" to 39.37" ■ 1 to 120 0.04" to 4.72"	1 to 820 0.04" to 32.28" 1 to 540 0.04" to 21.25" 1 to 320 0.04" to 12.67"	1 to 220 0.04" to 8.65" 1 to 85 0.04" to 3.35" 1 to 79 0.04" to 3.11"	FU-43TZ Approx. 22g

*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

Sleeve Type Fibers



Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch)*			Model Weight
				TERA (Longest) FINE (Initial)	Other power modes		
					MEGA ULTRA SUPER	TURBO HSPD S-HSPD	
Side		2 m 6.6' Free-cut (ø1.0 ø0.04" x 2) -40 to +70°C (-40 to +158°F)	R10 R0.39"	■ 340 13.39" ■ 159 2.32"	290 11.42" 220 8.66" 130 5.12"	85 3.35" 22 0.87" 12 0.47"	FU-31 Approx. 5g
		1 m 3.3' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C (-40 to +158°F)	R25 R0.98"	■ 750 29.53" ■ 83 3.27"	540 21.26" 420 16.54" 230 9.06"	150 5.91" 54 2.13" 31 1.22"	FU-33 Approx. 10g

*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹⁾			Model Weight
				TERA (Longest)	Other power modes		
Beam emitting direction				MEGA ULTRA SUPER	TURBO HSPD S-HSPD		
Top	Sleeve section cannot be bent 	50 cm 19.69" Cut not allowed -40 to +70°C (-40 to +158°F)	R4 R0.16"	150 5.91* 33 1.30*	110 4.33* 92 3.62* 68 2.68*	46 1.81* 13 0.51* 7 0.28*	FU-65X Approx. 5g
	Min. bend radius of sleeve: R10 R0.39" 	2 m 6.6' Free-cut (ø1.3 ø0.05" x 2) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex	580 22.83* 90 3.54*	420 16.54* 280 11.02* 170 6.69*	120 4.72* 29 1.14* 17 0.67*	FU-63Z Approx. 10g
	Min. bend radius of sleeve: R10 R0.39" 	2 m 6.6' Free-cut (ø1.3 ø0.05" x 2) -40 to +70°C (-40 to +158°F)	R25 R0.98"	640 25.20* 130 5.12*	500 19.69* 390 15.35* 250 9.84*	170 6.69* 50 1.97* 30 1.18*	FU-63 Approx. 10g
	Sleeve section cannot be bent 	50 cm 19.69" Cut not allowed -40 to +70°C (-40 to +158°F)	R4 R0.16"	120 4.72* 33 1.30*	100 3.94* 83 3.27* 68 2.68*	46 1.81* 11 0.43* 6 0.24*	FU-63T Approx. 10g
	Sleeve section cannot be bent 	2 m 6.6' Free-cut (ø1.3 ø0.05" x 2) -40 to +70°C (-40 to +158°F)	R25 R0.98"	640 25.20* 130 5.12*	500 19.69* 390 15.35* 250 9.84*	170 6.69* 50 1.97* 30 1.18*	FU-45X Approx. 4g
	Sleeve section cannot be bent 	2 m 6.6' Free-cut (ø1.3 ø0.05" x 2) -40 to +70°C (-40 to +158°F)	R25 R0.98"	640 25.20* 130 5.12*	500 19.69* 390 15.35* 250 9.84*	170 6.69* 50 1.97* 30 1.18*	FU-43 Approx. 8g
Coaxial, narrow beam 10°	Sleeve section cannot be bent 	1 m 3.3' Cut not allowed -40 to +70°C (-40 to +158°F)	R10 R0.39"	64 2.52* 8 0.31*	46 1.81* 30 1.18* 22 0.87*	14 0.55* 3 0.12* 1 0.04*	FU-46 Approx. 2g
	Sleeve section cannot be bent 	50 cm 19.69" Cut not allowed -40 to +70°C (-40 to +158°F)	R25 R0.98"	160 6.30* 42 1.65*	120 4.72* 100 3.94* 76 2.99*	54 2.13* 20 0.79* 11 0.43*	FU-22X Approx. 4g

*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

High-Flex Fibers (Repeated Bending Fibers)

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹⁾			Model Weight
				TERA (Longest)	Other power modes		
Size				MEGA ULTRA SUPER	TURBO HSPD S-HSPD		
ø2 ø0.08"	ø2 ø0.08" 	1 m 3.3' Free-cut (ø1.0 ø0.04" x 2) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex High-flex	290 11.42* 59 2.32*	220 8.66* 180 7.09* 110 4.33*	80 3.15* 21 0.83* 12 0.47*	FU-49U Approx. 4g
	ø3 ø0.12" 	1 m 3.3' Free-cut (ø1.0 ø0.04" x 2) -40 to +50°C (-40 to +122°F)					
M3	M3 	1 m 3.3' Free-cut (ø1.0 ø0.04" x 2) -40 to +50°C (-40 to +122°F)	R4 R0.16"	280 11.02* 59 2.32*	250 9.84* 170 6.69* 130 5.12*	91 3.58* 25 0.98* 14 0.55*	FU-49X Approx. 3g
	M3 	1 m 3.3' Cut not allowed -40 to +70°C (-40 to +158°F)					
ø3 ø0.12"	ø3 ø0.12" 	2 m 6.6' Free-cut (ø1.0 ø0.04" x 2) -40 to +70°C (-40 to +158°F)	R4 R0.16"	500 19.69* 90 3.54*	350 13.78* 270 10.63* 190 7.48*	120 4.72* 32 1.26* 18 0.71*	FU-48 Approx. 7g
	M4 	2 m 6.6' Free-cut (ø1.0 ø0.04" x 2) -40 to +70°C (-40 to +158°F)					

*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

Reflective

Oil/Chemical Resistant Fibers

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹			Standard target to be detected	Model Weight
				TERA (Longest)	Other power modes	MEGA ULTRA SUPER	TURBO HSPD S-HSPD	
Top		2 m 6.6' Free-cut (ø1.3 0.05" x 2) -40 to +70°C (-40 to +158°F)	R40 R1.57"	310 12.20" 290 11.42" 250 9.84"	310 12.27" 130 5.12" 95 3.74"	—	—	FU-91 Approx. 32g
		2 m 6.6' Free-cut (ø1.3 0.05" x 2) -40 to +60°C (-40 to +140°F)		8 to 20 0.31" to 0.79"	8 to 20 0.31" to 0.79"	8 to 20 0.31" to 0.79"	200 x 200 mm 7.87" x 7.87"	FU-97P Approx. 75g
		2 m 6.6' Free-cut (ø1.3 0.05" x 2) -40 to +85°C (-40 to +185°F)		8 to 20 0.31" to 0.79"	8 to 20 0.31" to 0.79"	8 to 20 0.31" to 0.79"	t = 0.7 mm 0.03" Glass substrate	FU-97S Approx. 90g

¹ When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

Heat Resistant Fibers

Type	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹			Model Weight	
				TERA (Longest)	Other power modes	MEGA ULTRA SUPER	TURBO HSPD S-HSPD	
100°C ⁴ (212°F)		2 m 6.6' Free-cut (ø2.2 0.09" x 2) -20 to +100°C (-40 to +212°F)	R5 R0.20" ToughFlex	900 35.43" 290 11.42"	810 31.89" 700 27.56" 520 20.47"	430 16.93" 150 5.91" 86 3.39"	FU-85Z Approx. 25g	
105°C ⁴ (221°F)		2 m 6.6' Free-cut (ø2.2 0.09" x 2) -40 to +105°C (-40 to +221°F)	R25 R0.98"	1200 47.24" 420 16.54"	1100 43.31" 860 33.86" 630 24.80"	530 20.87" 210 8.27" 130 5.12"	FU-85A Approx. 21g	
150°C ⁵ (302°F)		2 m 6.6' Free-cut (ø2.2 0.09" x 2) -40 to +150°C (-40 to +302°F)	R20 R0.79"	1100 43.31" 290 11.42"	950 37.40" 870 34.25" 650 25.59"	540 21.26" 150 5.91" 90 3.54"	FU-85H Approx. 35g	
180°C ⁶ (356°F)		2 m 6.6' Free-cut (ø2.2 0.09" x 2) -60 to +180°C (-76 to +356°F)	R35 R1.38"	1200 47.24" 370 14.57"	1000 39.37" 890 35.04" 670 26.38"	560 22.05" 170 6.69" 100 3.94"	FU-87 Approx. 33g	
200°C (392°F)		1 m 3.3' Cut not allowed -40 to +200°C (-40 to +392°F)	R8 R0.31"					FU-87K Approx. 15g
300°C (572°F)		1 m 3.3' Cut not allowed -40 to +300°C (-40 to +572°F)	R25 R0.98"	790 31.10" 350 13.78"	770 30.31" 670 26.38" 600 23.62"	500 19.69" 170 6.69" 100 3.94"	FU-82C Approx. 29g	
		1 m 3.3' Cut not allowed -40 to +300°C (-40 to +572°F)						FU-83C Approx. 23g
350°C (662°F)		1 m 3.3' Cut not allowed -30 to +350°C (-22 to +662°F)		670 26.38" 250 9.84"	650 25.59" 590 23.23" 550 21.65"	470 18.50" 140 5.51" 90 3.54"	FU-81C Approx. 24g	
250°C (482°F)	<td>2 m 6.6' Cut not allowed -40 to +250°C (-40 to +482°F)</td> <td data-kind="parent" data-rs="2">R25 R0.98"</td> <td>8 to 86 0.31" to 3.39" 8 to 51 0.31" to 2.01"</td> <td>8 to 62 0.31" to 2.44" 8 to 57 0.31" to 2.24" 8 to 54 0.31" to 2.13"</td> <td>8 to 51 0.31" to 2.01" 8 to 30 0.31" to 1.18" 9 to 23 0.35" to 0.91"</td> <td>FU-38LK Approx. 70g</td>	2 m 6.6' Cut not allowed -40 to +250°C (-40 to +482°F)	R25 R0.98"	8 to 86 0.31" to 3.39" 8 to 51 0.31" to 2.01"	8 to 62 0.31" to 2.44" 8 to 57 0.31" to 2.24" 8 to 54 0.31" to 2.13"	8 to 51 0.31" to 2.01" 8 to 30 0.31" to 1.18" 9 to 23 0.35" to 0.91"	FU-38LK Approx. 70g	
	<td>1 m 3.3' Cut not allowed -40 to +250°C (-40 to +482°F)</td> <td data-kind="ghost"></td> <td>2.5 to 150 0.10" to 5.91"</td> <td>2.5 to 110 0.10" to 4.33" 2.5 to 93 0.10" to 3.66" 2.5 to 45 0.10" to 1.77"</td> <td>2.5 to 37 0.10" to 1.46" 2.5 to 17 0.10" to 0.67" 2.5 to 10 0.10" to 0.39"</td> <td>FU-38K Approx. 45g</td>	1 m 3.3' Cut not allowed -40 to +250°C (-40 to +482°F)		2.5 to 150 0.10" to 5.91"	2.5 to 110 0.10" to 4.33" 2.5 to 93 0.10" to 3.66" 2.5 to 45 0.10" to 1.77"	2.5 to 37 0.10" to 1.46" 2.5 to 17 0.10" to 0.67" 2.5 to 10 0.10" to 0.39"	FU-38K Approx. 45g	
180°C ⁶ (356°F)	<td>2 m 6.6' Free-cut (ø2.2 0.09" x 2) -40 to +180°C (-40 to +356°F)</td> <td>R35 R1.38"</td> <td>2.5 to 27 0.10" to 1.06"</td> <td></td> <td></td> <td></td> <td>FU-38H Approx. 45g</td>	2 m 6.6' Free-cut (ø2.2 0.09" x 2) -40 to +180°C (-40 to +356°F)	R35 R1.38"	2.5 to 27 0.10" to 1.06"				FU-38H Approx. 45g

¹ When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.)

² The smallest detectable object was determined at the optimal detecting distance and sensitivity settings.

³ Use the fiber sensor under dry conditions. Allow some margin for the temperature upper limit when selecting a heat-resistant fiber unit.

⁴ The recommended maximum ambient temperature during operation is 90°C (194°F) when constantly using the fiber unit in a high-temperature environment.

⁵ The recommended maximum ambient temperature during operation is 130°C (266°F) when constantly using the fiber unit in a high-temperature environment.

⁶ The recommended maximum ambient temperature during operation is 150°C (302°F) when constantly using the fiber unit in a high-temperature environment.

Area/Array Fibers

Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹⁾			Model Weight
Detecting method	Optical axis width				TERA (Longest) FINE (Initial)	Other power modes		
			MEGA ULTRA SUPER	TURBO HSPD S-HSPD				
Array	10 mm 0.39" (at distance of 4mm 0.16")		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C (-40 to +158°F)	R4 ² R0.16"	1200 47.24"	1100 43.31"	300 11.81"	FU-A05D Approx. 20g
	15 mm 0.59" (at distance of 4mm 0.16")		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C (-40 to +158°F)		250 9.84"	780 30.71"	440 17.32"	
Area	15 mm 0.59" (at distance of 15mm 0.59")		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C (-40 to +158°F)	R25 R0.98"	5 to 210 0.20" to 8.27" 5 to 210 0.20" to 8.27" 5 to 210 0.20" to 8.27"	5 to 210 0.20" to 8.27" 5 to 160 0.20" to 6.30" 5 to 110 0.20" to 4.33"	5 to 210 0.20" to 8.27" 5 to 160 0.20" to 6.30" 5 to 110 0.20" to 4.33"	FU-11 Approx. 19g

*1 When using the FS-N40 Series. Standard target: White matte paper (Reflective type only.) *2 R10 R0.39" for the first 10 mm 0.39" of cable from the housing.

Liquid-Level Fibers

Type			Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Accessories	Model Weight
Detecting method	Transparent tube diameter (mm inch)	Beam axes					
Tube-mountable	ø4 to 26 ø0.16" to 1.02"	16		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C (-40 to +158°F)	R5 R0.20"	Binding band x 2 Nonslip rubber x 2	FU-95S Approx. 23g
		1		2 m 6.6' Free-cut (ø1.0 ø0.04" x 2) -40 to +50°C (-40 to +122°F) FU-95Z: -40 to +105°C (-40 to +221°F)* FU-95HA: -40 to +105°C (-40 to +221°F)* FU-95: -40 to +70°C (-40 to +158°F)	R2 R0.08" ToughFlex	Binding band x 2 Nonslip rubber x 2 Spacer x 2 Screw x 2 Nut x 2	
	More than ø26 1.02" recommended	16		2 m 6.6' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C (-40 to +158°F)	R10 R0.39"	FU-95 Approx. 7g	
					R10 R0.39"	—	FU-95W Approx. 20g

* The recommended maximum ambient temperature during operation is 90°C (194°F) when constantly using the fiber unit in a high-temperature environment.

Type		Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)		Model Weight
Detecting method	PFA-sheathed section			PFA-sheathed section	Fiber	
Immersion	R40 ² R1.57"		2 m 6.6' Free-cut (ø1.3 ø0.05" x 2) FU-93Z: -40 to +50°C (-40 to +122°F) FU-93: -40 to +70°C (-40 to +158°F)	R0.5 R0.02" ToughFlex	FU-93Z Approx. 78g	
				R40 ² R1.57"	R25 R0.98"	FU-93 Approx. 78g

* Not bendable up to 80 mm 3.15" from the tip.

Helpful Usage Tips

- Use the timer function on the fiber optic amplifier if chattering occurs due to dripping or bubbles in the liquid.
- Do not pull or push the fiber unit. 30N every three seconds maximum for the FU-93 Series, and 10N every three seconds maximum for the FU-95 Series.
- Stable detection may not be possible in the following cases (FU-93 Series):
 - If a bubble adheres to the tip of the sensor;
 - If foreign material adheres to the tip of the sensor;
 - When detecting highly adhesive liquid;
 - When detecting high temperature liquids such as strong acid or strong alkali (Liquid with PFA mixed or penetrated, or fluorinated acid.); and opalescent liquid or liquid that colors PFA.
- A tube whose wall thickness is 3 mm 0.12" or greater may make detection difficult. (FU-95 Series)
- FU-95 Series cannot be used for opaque tubes.
- Use the Display Scaling function of the FS-N40/N10 Series to adjust the displayed light intensity.
- With the FU-93/93Z, the sensor and PFA case are inserted into a thermo fitted tube 80 mm 3.15", up to the tip, in order to secure them in place. Take care to avoid cutting this tube, which will result in looseness.

Retro-Reflective

Retro-Reflective Fibers

Type Beam emitting direction	Appearance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch)*1			Model Weight	
				TERA (Longest) FINE (Initial)	Other power modes			
					MEGA ULTRA SUPER	TURBO HSPD S-HSPD		
M6		2 m 6.6' Free-cut (ø1.0 ø0.04" x 2) -40 to +50°C (-40 to +122°F)	R2 R0.08" ToughFlex		10 to 1000 0.39" to 39.37" 10 to 810 0.39" to 31.89" 10 to 550 0.39" to 21.65"	10 to 380 0.39" to 14.96" — —	FU-13 Approx. 8g	
Square type		2 m 6.6' Free-cut (ø1.0 ø0.04" x 2) -20 to +55°C (-4 to +131°F)	R10 R0.39"		100 to 10000 3.94" to 393.70" 100 to 8500 3.94" to 334.65" 100 to 4200 3.94" to 165.35"	100 to 2800 3.94" to 110.24" 100 to 1700 3.94" to 66.93" 100 to 1200 3.94" to 47.24"	FU-15 Approx. 12g	

*1 When using the FS-N40 Series.

Reflector/Reflective Tape Specifications (Optional Parts)

Type	Power modes	R-2 (OP-95388)	R-3 (OP-96436)	R-5	Reflective tape (OP-96629)
FU-13	TERA (mm inch)	10 to 2200 0.39" to 86.61"	10 to 1800 0.39" to 70.87"	10 to 1200 0.39" to 47.24"	10 to 1100 0.39" to 43.31"
	MEGA (mm inch)	10 to 2000 0.39" to 78.74"	10 to 1700 0.39" to 66.93"	10 to 1100 0.39" to 43.31"	10 to 1000 0.39" to 39.37"
	ULTRA (mm inch)	10 to 1600 0.39" to 62.99"	10 to 1300 0.39" to 51.18"	10 to 910 0.39" to 35.83"	10 to 810 0.39" to 31.89"
	SUPER (mm inch)	10 to 1100 0.39" to 43.31"	10 to 920 0.39" to 36.22"	10 to 630 0.39" to 24.80"	10 to 550 0.39" to 21.65"
	TURBO (mm inch)	10 to 760 0.39" to 29.92"	10 to 600 0.39" to 23.62"	10 to 380 0.39" to 14.96"	10 to 380 0.39" to 14.96"
	FINE (mm inch)	10 to 460 0.39" to 18.11"	10 to 360 0.39" to 14.17"	10 to 230 0.39" to 9.06"	10 to 220 0.39" to 8.66"
	HSPD (mm inch)	10 to 250 0.39" to 9.84"	10 to 200 0.39" to 7.87"	10 to 120 0.39" to 4.72"	—
	S-HSPD (mm inch)	10 to 230 0.39" to 9.06"	10 to 180 0.39" to 7.09"	—	—
FU-15	TERA (mm inch)	100 to 14000 3.94" to 551.18"	100 to 9500 3.94" to 374.02"	100 to 4400 3.94" to 173.23"	Reflective tape cannot be used.
	MEGA (mm inch)	100 to 10000 3.94" to 393.70"	100 to 6800 3.94" to 267.72"	100 to 4000 3.94" to 157.48"	
	ULTRA (mm inch)	100 to 8500 3.94" to 334.65"	100 to 6100 3.94" to 240.16"	100 to 3700 3.94" to 145.67"	
	SUPER (mm inch)	100 to 4200 3.94" to 165.35"	100 to 3300 3.94" to 129.92"	100 to 2400 3.94" to 94.49"	
	TURBO (mm inch)	100 to 2800 3.94" to 110.24"	100 to 2200 3.94" to 86.61"	100 to 1900 3.94" to 74.80"	
	FINE (mm inch)	100 to 2300 3.94" to 90.55"	100 to 1800 3.94" to 70.87"	100 to 1800 3.94" to 70.87"	
	HSPD (mm inch)	100 to 1700 3.94" to 66.93"	100 to 1200 3.94" to 47.24"	100 to 1200 3.94" to 47.24"	
	S-HSPD (mm inch)	100 to 1200 3.94" to 47.24"	100 to 920 3.94" to 36.22"	100 to 920 3.94" to 36.22"	

Fiber Unit Adapter Options

Fibers with a cable diameter of 1.0 mm 0.04" or 1.3 mm 0.05" come with an adapter to connect to the fiber amplifier. If you lose the adapter, purchase the appropriate adapter listed here.

Appearance	Cable diameter	Adaptor
	ø1.3 ø0.05"	Adaptor A (OP-26500)
	ø1.0 ø0.04"	Adaptor B (OP-26501)

Thrubeam

Vacuum Environment Type Fibers

Type			Appearance (mm inch)	Ambient temperature	Minimum bend radius (mm inch)	Detecting distance (mm inch) ¹				Model Weight
Detecting Dimensions method	Description	Heat resistant temperatures				TERA (Longest)	FINE (Initial)	MEGA ULTRA SUPER	TURBO HSPD S-HSPD	
Thrubeam	Vacuum side	350°C (662°F)	M4×P0.7 SUS304 3.012" 0.47" 25.098" 12 0.47"	1 m 3.3' Cut not allowed -40 to +350°C (-40 to +662°F)	R25 R0.98"	2400 94.49" 1200 47.24" 500 19.69"	1800 70.87" 610 24.02" 850 33.46" 210 8.27" 110 4.33"	FU-V84 FU-V84L	Approx. 55g Approx. 60g	
		350°C (662°F)	M4×P0.7 SUS304 3.012" 0.47" 21.1 0.53" Max 37	1 m 3.3' Cut not allowed -40 to +350°C (-40 to +662°F)						
	Air side	70°C (158°F)	Across-flats: 8 0.31" 10 0.39"	2 m 6.6' Free-cut (0.2.2 ø0.09") -40 to +70°C (-40 to +158°F)					FU-V7FN	Approx. 30g

*1 When using the FS-N40 Series.

Type		Appearance (mm inch)	Ambient temperature	Material	Accessories				Model Weight
Description	Heat resistant temperatures				TERA	MEGA	ULTRA	SUPER	
Optical integrator for thrubeam set	200°C (392°F)	 45 1.77"	-10 to +200°C (14 to +392°F)	Fiber: Multi-component glass	M6nut, spring washer, washer two (2) each O-ring (2): Fluoro-rubber (JIS Type 4D)				FU-VJ1 Approx. 25g


Type		Appearance (mm inch)	Ambient temperature	Applicable fiber units	Detecting distance (mm inch) ²								Model Weight
Description	Heat resistant temperatures				TERA	MEGA	ULTRA	SUPER	TURBO	FINE	HSPD	S-HSPD	
Vacuum long-distance lens	350°C (662°F)	 End ø4 ø0.16" 7.7 0.30"	-10 to +350°C (14 to +662°F)	FU-V84 FU-V84L	5600 220.47"	5600 220.47"	5600 220.47"	4400 173.23"	3000 118.11"	2200 86.61"	1000 39.37"	740 29.13"	F-V2 Approx. 2g

*2 When using the FS-N40 Series.

Type		Appearance (mm inch)	Ambient temperature	Features	Accessories				Model Weight	
Description	Heat resistant temperatures				TERA	MEGA	ULTRA	SUPER		
2 channel chamber flange	200°C (392°F)	 ø70 ø2.76"	-10 to +200°C (14 to +392°F)	With this part, two sets of optical integrators (four optical integrators in total) can be connected to the four through holes. This part has an outer diameter of 70 mm 2.76" and is sealed with a V40 O-ring. For details on the shape, see "Dimensions."	O-ring (1) Material: Fluoro-rubber (JIS Type 4D)					FU-VJ2 Approx. 280g

Attaching the Optical Integrator

An optical integrator can be used to seal the vacuum side and air side and transmit light between the vacuum-side fiber and the air-side fiber. Optical integrators undergo leak testing prior to shipping. (Leak testing in which the leak amount is 1×10^{-10} Pa· m³/sec or less)

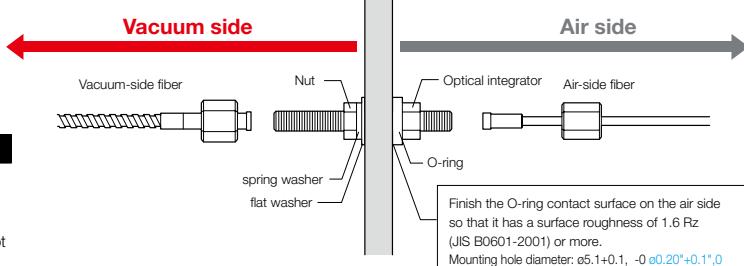

PRECAUTIONS

Be careful when breaking the seal as the vacuum side fiber and optical coupler are placed in a package containing deaerator after being cleaned with alcohol. They are not baked after cleaning, so bake before use.

Specifications

■ Amplifier Units

Model	NPN output FS-N41N	FS-N42N	FS-N43N	FS-N44N	FS-N41C ^{*1} (Selectable output)	FS-N40					
	PNP output FS-N41P	FS-N42P	FS-N43P	FS-N44P							
Cable/connector	Cable		M8 Connector ^{*2}		-						
Main unit/expansion unit	Main unit	Expansion unit	Main unit	Expansion unit	Main unit	Expansion unit					
Number of control outputs	1	1	2	2	2 ^{*3}	None ^{*4}					
Number of external inputs	-	-	1	1	1 ^{*3}	-					
Light source LED	Transmitter side: Red, four-element LED (wavelength: 660 nm)										
Response time	23 µs (S-HSPD ^{*5} /50 µs (HSPD ^{*6})/250 µs (FINE)/500 µs (TURBO)/ 1 ms (SUPER)/4 ms (ULTRA)/16 ms (MEGA)/64 ms (TERA)										
Control output	Residual voltage	Open-collector, 30 V or less total for 2 outputs (when used as a solitary unit) / 20 mA or less (when used as an expansion unit)				-					
		NPN 1.4 V or less (output current: 10 mA or less) / 2 V or less (output current: 10 to 100 mA) PNP 1.6 V or less (output current: 10 mA or less) / 2.2 V or less (output current: 10 to 100 mA)				-					
External input	Input time: 2 ms (ON) / 20 ms (OFF) or longer ^{*7}										
Unit expansion (excluding the FS-N41C)	Up to 16 units (17 units connected in total including the main unit). However, each dual output type will be treated as two expansion units.										
Protection circuit	Protection against reverse power connection, output overcurrent, output surge, and reverse output connection										
Mutual interference prevention	S-HSPD / HSPD: 0 units, FINE: 4 units, TURBO / SUPER / ULTRA / MEGA / TERA: 8 units (The mutual interference prevention values are twice those shown here when Double is set.)										
Power supply voltage	10 to 30 VDC (including 10% ripple (P-P) or less), class 2 or LPS ^{*8}										
Power supply	NPN FS-N40	During normal operation: 870 mW or less (34 mA or less at 24 V / 62 mA or less at 12 V) ECO ON: 800 mW or less (31 mA or less at 24 V / 56 mA or less at 12 V) ECO FULL: 710 mW or less (28 mA or less at 24 V / 49 mA or less at 12 V)									
		Single output type (FS-N41P / N42P) and FS-N41C During normal operation: 910 mW or less (36 mA or less at 24 V / 65 mA or less at 12 V) ECO ON: 840 mW or less (33 mA or less at 24 V / 60 mA or less at 12 V) ECO FULL: 750 mW or less (30 mA or less at 24 V / 52 mA or less at 12 V)									
	PNP FS-N41C	Dual output type (FS-N43P / N44P) During normal operation: 990 mW or less (39 mA or less at 24 V / 72 mA or less at 12 V) ECO ON: 920 mW or less (36 mA or less at 24 V / 66 mA or less at 12 V) ECO FULL: 830 mW or less (33 mA or less at 24 V / 59 mA or less at 12 V)									
Ambient light	Incandescent lamp: 20,000 lx or less, sunlight: 30,000 lx or less										
Ambient temperature	-20°C -4°F to +55°C +131°F (no freezing) ^{*10}										
Vibration resistance	10 to 55 Hz; double amplitude 1.5 mm 0.06 ; 2 hours each for X, Y, and Z axes										
Shock resistance	500 m / s ² ; 3 times each for X, Y, and Z axes										
Case material	Main unit and cover: polycarbonate										
Weight	Approx. 78 g	Approx. 48 g	Approx. 83 g	Approx. 73 g	Approx. 25 g	Approx. 23 g					

*1 IO-Link Specification V1.1/COM2 (38.4 kbps) is supported.

*2 Ensure the cable length is 30 m **98.4'** or less for the M8 connector type. Ensure the cable length is 20 meters **65.6'** or less when connecting by way of IO-Link.

*3 Output 2 and the external input are selectable.

*4 This counts as 1 output when connecting multiple units to the FS-MC8N/P, NU Series.

*5 Restrictions when S-HSPD is selected

- Output 2 of dual output types (FS-N43N / N43P / N44N / N44P / N41C) is fixed to OFF.
- IO-Link communication (FS-N41C) cannot be used.
- Area detection, Area % Mode, DATUM, Rising edge, and Falling edge cannot be selected for Detection Mode.
- Output timer, Limit Detection, and Display Gain cannot be used.
- FULL cannot be selected for the ECO function.

*6 Restrictions when HSPD is selected

- Display Gain cannot be used.

*7 The input time becomes 25 ms (ON)/25 ms (OFF) when external calibration input is selected.

*8 When expanding the system to 9 or more units, use a power supply voltage of 12 V or higher.

*9 The load current is excluded. The power consumption including the load when the maximum number of units are connected is 38 W max.

*10 When expanded by 1 to 2 units: -20°C **-4°F** to +55°C **+131°F**. When expanded by 3 to 10 units: -20°C **-4°F** to +50°C **+122°F**.

When expanded by 11 to 16 units: -20°C **-4°F** to +45°C **+113°F**. When using 2 outputs, 1 unit is counted as 2 units.

The prescribed values for the ambient temperature assume that the sensor amplifier has been mounted on a DIN rail installed on a metal surface.

Exercise special care when installing the product in an airtight space.

■ Multi-Output Unit

Model	NPN output	FS-MC8N
	PNP output	FS-MC8P
Number of inputs and outputs		Separate control outputs: 8, common output: 1, common input: 1
Response time		Depends on the response time settings of the connected expansion units
Unit expansion		Up to 8 expansion units can be connected. (However, each dual output type will be treated as 2 expansion units.) Allowable passing current: 1200 mA or less
Indicators		STATUS indicator (green and red two-color display) MEMORY indicator (orange) LOCK indicator (orange)
Separate control output, common output	NPN output	NPN open-collector, 30 V or less, 20 mA or less per output, residual voltage: 1.4 V or less
	PNP output	PNP open-collector, 30 V or less, 20 mA or less per output, residual voltage: 1.6 V or less
External input time		Input time of the connected expansion units +11 ms
Protection circuit		Protection against reverse power connection, reverse output connection, output overcurrent, and output surge
Power supply	Power supply voltage¹	10 to 30 VDC (including 10% ripple (P-P) or less), class 2 or LPS
	Power consumption²	690 mW or less (when used as a solitary unit) (26 mA or less at 24 V/38 mA or less at 12 V [excluding the load current])
Environmental resistance	Ambient temperature	-20°C -4°F to +55°C +131°F (no freezing)
	Vibration resistance	10 to 55 Hz; double amplitude 1.5 mm 0.06"; 2 hours each for X, Y, and Z axes
	Shock resistance	500 m/s ² , 3 times each for X, Y, and Z axes
Case material		Main unit and cover: polycarbonate
Weight		Approx. 110 g


*1 Match the rated power supply voltage of the expansion units to be connected to the system.

*2 The power consumption including the load when the maximum number of units are connected is 38 W max.

I/O Circuit Diagrams


■ Amplifier Units (Cable Type)

FS-N41N/N42N

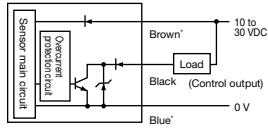


*FS-N41N only

FS-N41P/N42P

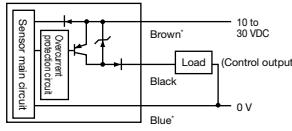


*FS-N41P only

FS-N43N/N44N

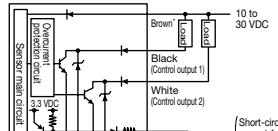

*FS-N43N only


FS-N43P/N44P

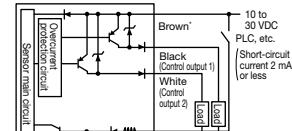

*FS-N43P only


■ Amplifier Unit (M8 Connector Type FS-N41C)

Select PNP or NPN and the function of I/O pin (2) during the initial settings.




When using the sensor in PNP mode

[OUT1 + OUT2 selected]

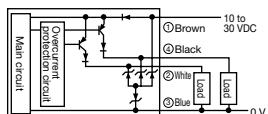


[OUT1 + INPUT selected]

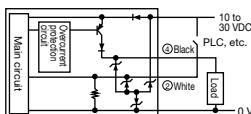


When using the sensor in NPN mode

[OUT1 + OUT2 selected]

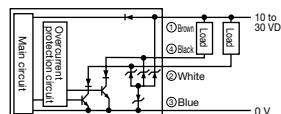


[OUT1 + INPUT selected]

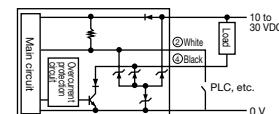

The wire colors indicate the colors when using an OP-73864/73865 M8 connector cable (sold separately).


■ Multi-Output Unit

FS-MC8N

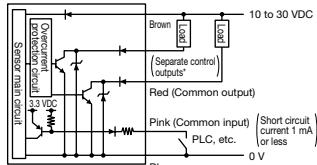

* Black, white, orange, yellow, green, purple, gray, pink / purple


FS-MC8P

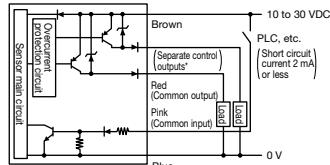




FS-N41N/N41P/N43N/N43P
Main Unit
(Cable Type)

$\varnothing 3.9 \text{ } \varnothing 0.15"$ 3-core x brown/blue/black 0.34 mm^2 0.000527^{*2}
Cord length 2 m $6.56'$



Maximum when cover is opened
105.2 $4.14"$
4 $0.16"$
8.1 $0.32"$

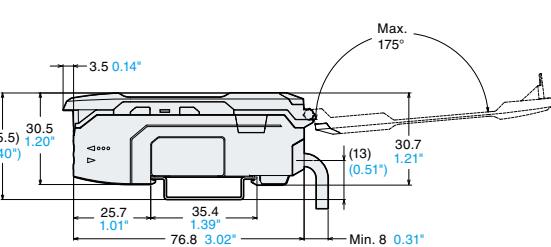


* FS-N43N/N43P is $\varnothing 3.9 \text{ } \varnothing 0.15$, 5-core x brown/blue 0.34 mm^2 0.000527^{*2} , black/white/pink 0.18 mm^2 0.000279^{*2}


FS-N42N/N42P/N44N/N44P
Expansion Unit
(Cable Type)

$\varnothing 2.6 \text{ } \varnothing 0.10"$ 1-core x black 0.34 mm^2 $0.000527^{*2 \dagger 1}$
Cord length 2 m $6.56'$

10.7 $0.42"$



Maximum when cover is opened
105.2 $4.14"$
4 $0.16"$
8.1 $0.32"$

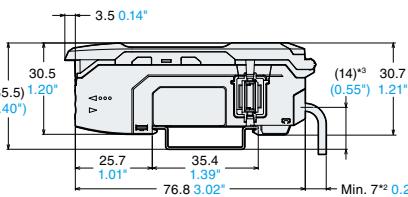

*1. FS-N44N/N44P is $\varnothing 3.9 \text{ } \varnothing 0.15$, 3-core x black/white/pink 0.18 mm^2 0.000279^{*2}


*2. Minimum 8 for FS-N44N/N44P

*3. (13) for FS-N44N/N44P




FS-N41C
Main Unit (M8 Connector Type)

10.7 $0.42"$





Maximum when cover is opened
105.2 $4.14"$
4 $0.16"$
8.1 $0.32"$

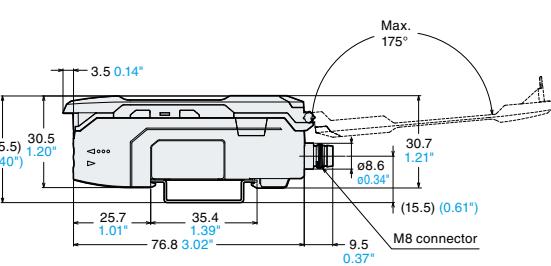


FS-N40
Expansion Unit (Zero Line Type)

10.7 $0.42"$

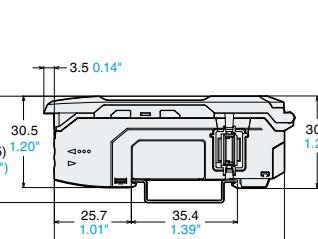


Maximum when cover is opened
105.2 $4.14"$
4 $0.16"$
8.1 $0.32"$

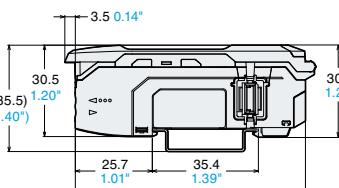


M8 Connector Cable (Optional Part, Sold Separately)

Cable length	L (m feet)
OP-73864	2 $6.6'$
OP-73865	10 $32.8'$



Amplifier Securing Bracket (OP-88245 Optional Part, Sold Separately)


Cable Type

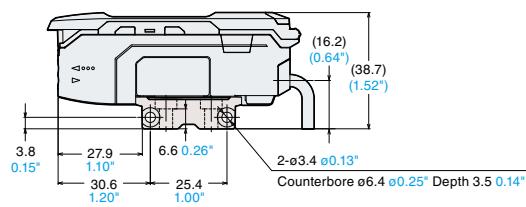

Back of securing bracket

Material: Polycarbonate

M8 Connector Type

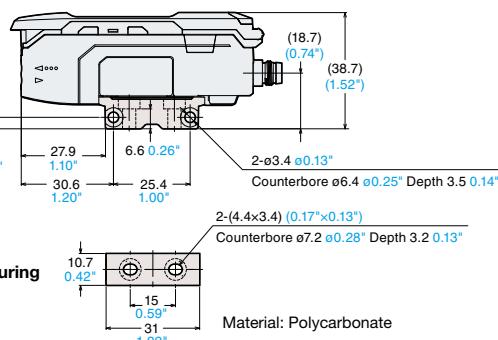


Back of securing bracket

Material: Polycarbonate


Common to All Models

End Unit


(OP-26751 Optional Part, Sold Separately)



When Mounted on a DIN Rail

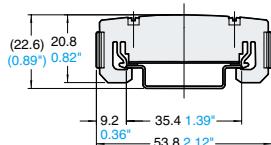

When Several Units are Connected

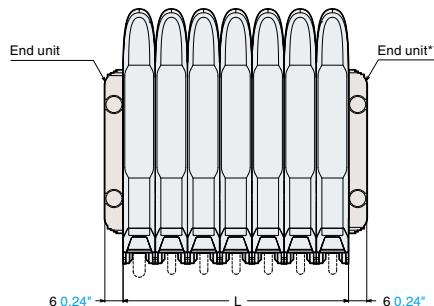


Total Number	L (mm inch)
1	10.7 0.42"
2	21.4 0.84"
3	32.1 1.26"
4	42.8 1.69"
5	53.5 2.11"
6	64.2 2.53"
7	74.9 2.95"
8	85.6 3.37"
9	96.3 3.79"
10	107 4.21"
11	117.7 4.63"
12	128.4 5.06"
13	139.1 5.48"
14	149.8 5.90"
15	160.5 6.32"
16	171.2 6.74"
17	181.9 7.16"


*1. When using expansion units, be sure to use the end units. (Optional)



FS-MC8N/P
Multi-Output Unit

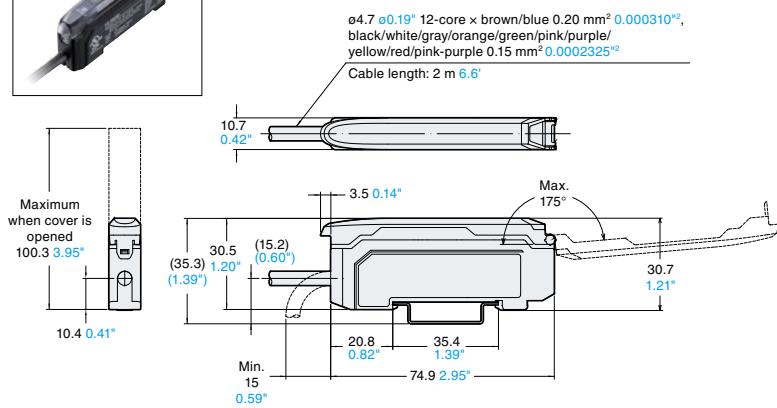


Multi-Output Unit + Unit Expansion

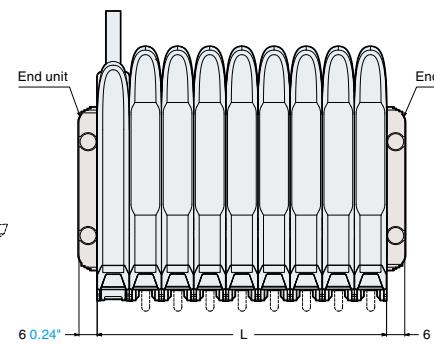


Total Number	L (mm inch)
1	10.7 0.42"
2	21.4 0.84"
3	32.1 1.26"
4	42.8 1.69"
5	53.5 2.11"
6	64.2 2.53"
7	74.9 2.95"
8	85.6 3.37"
9	96.3 3.79"

*1. When using expansion units, be sure to use the end units. (Optional)


FU-R6F/R67

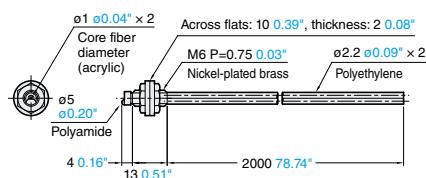


FU-R67G

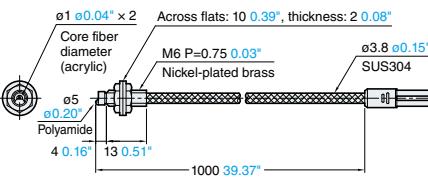


FU-R67TZ

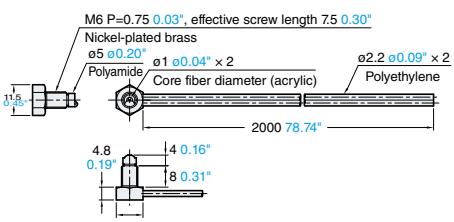


FU-R67TG

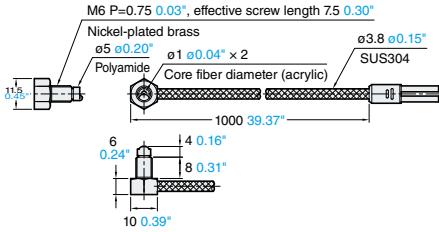


FU-R7F

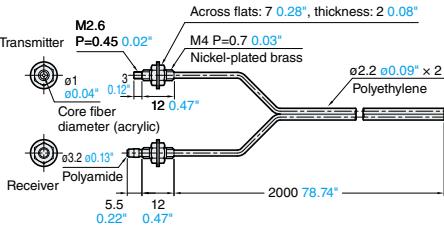


FU-R77

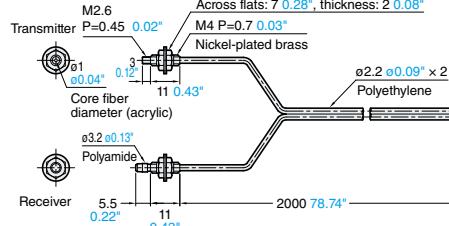


FU-R77G

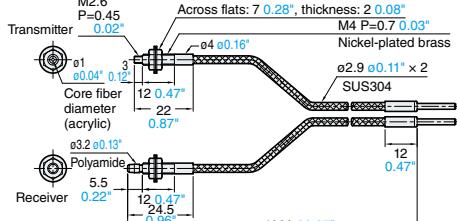

FU-R77TZ

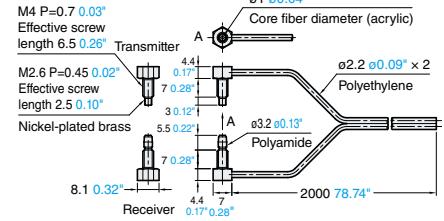

FU-R77TG

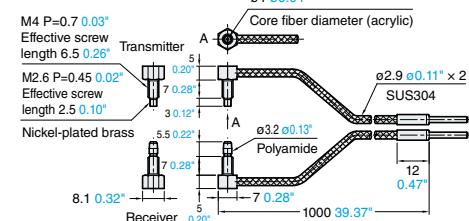

Simple and Reliable
The Solution to Any and All Applications.

**KEYENCE**CALL
TOLL
FREETO CONTACT YOUR LOCAL OFFICE
1-888-KEYENCE
1 - 8 8 8 - 5 3 9 - 3 6 2 3www.keyence.com**SAFETY INFORMATION**

Please read the instruction manual carefully in order to safely operate any KEYENCE product.

CONTACT YOUR NEAREST OFFICE FOR RELEASE STATUS

KEYENCE CORPORATION OF AMERICA**Head Office** 500 Park Boulevard, Suite 200, Itasca, IL 60143, U.S.A. **PHONE:** +1-201-930-0100 **FAX:** +1-855-539-0123 **E-mail:** keyence@keyence.com

AL Birmingham	CA San Jose	CO Denver	IL Chicago	MI Detroit	MO St. Louis	NC Raleigh	PA Philadelphia	TN Nashville	WI Milwaukee
AR Little Rock	CA Cupertino	FL Tampa	IN Indianapolis	MI Grand Rapids	NJ Elmwood Park	OH Cincinnati	PA Pittsburgh	TX Austin	
AZ Phoenix	CA Los Angeles	GA Atlanta	KY Louisville	MN Minneapolis	NY Rochester	OH Cleveland	SC Greenville	TX Dallas	
CA San Francisco	CA Irvine	IA Iowa	MA Boston	MO Kansas City	NC Charlotte	OR Portland	TN Knoxville	WA Seattle	

KEYENCE CANADA INC.**Head Office** PHONE: +1-905-366-7655 FAX: +1-905-366-1122 E-mail: keyencecanada@keyence.com
Montreal PHONE: +1-514-694-4740 FAX: +1-514-694-3206 Windsor PHONE: +1-905-366-7655 FAX: +1-905-366-1122**KEYENCE MEXICO S.A. DE C.V.****PHONE:** +52-55-8850-0100 **FAX:** +52-81-8220-9097
E-mail: keyencemexico@keyence.com

The information in this publication is based on KEYENCE's internal research/evaluation at the time of release and is subject to change without notice.

Company and product names mentioned in this catalog are either trademarks or registered trademarks of their respective companies.

The specifications are expressed in metric units. The English units have been converted from the original metric units.

Copyright (c) 2018 KEYENCE CORPORATION. All rights reserved.

KA1-1017

FSN40-KA-C-US 1058-4 611G30