


Product data sheet

Specifications

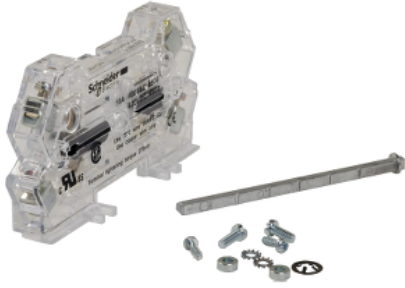

Auxiliary contacts, TeSys GS, 1NC +1NO, instantaneous, left side mounting, for GS1 and GS2 with front/right handle

GS1AN11

Main

Range of product	TeSys
Device short name	GS1AN
Product or component type	Auxiliary contact
Contact application	O and I position signalling
Contacts type and composition	1 NC + 1 NO
Contact operation	Instantaneous
[I _{th}] conventional free air thermal current	20 A (at 40 °C)
[I _e] rated operational current	1 A at 220 V DC-13 10 A at 230 V AC-15 12 A at 127 V AC-15 4 A at 48 V DC-13 6 A at 440 V AC-15 8 A at 400/415 V AC-15 1.2 A at 110 V DC-13

Complementary

Range compatibility	TeSys (TeSys GS) switch-disconnector-fuse
Mechanical durability	30000 cycles
Electrical durability	30000 cycles AC-15
Switch rated current	1250 A 160 A 400 A 50 A 63 A 800 A 250 A 315 A 600 A 125 A 100 A 60 A 200 A 630 A
Fuse type	NFC DIN BS
Type of operating handle	Direct frontal Direct right side External right side External frontal
Net weight	0.132 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.0 cm
Package 1 Width	7.0 cm
Package 1 Length	13.0 cm
Package 1 Weight	126.0 g
Unit Type of Package 2	S01
Number of Units in Package 2	20
Package 2 Height	15.0 cm
Package 2 Width	15.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	2.704 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
California proposition 65	WARNING: This product can expose you to chemicals including: Styrene, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov

Contractual warranty

Warranty	18 months
----------	-----------

Recommended replacement(s)