



ControlLogix I/O Modules Specifications

Bulletin 1756

| Topic | Page |
|------------------------------|------|
| Summary of Changes | 2 |
| I/O Module Overview | 3 |
| AC Digital I/O Modules | 5 |
| DC Digital I/O Modules | 43 |
| Safety I/O Modules | 125 |
| Contact I/O Modules | 141 |
| Analog I/O Modules | 147 |
| HART I/O Modules | 193 |
| Specialty I/O Modules | 211 |
| ControlLogix I/O Accessories | 235 |

The ControlLogix® Architecture provides a wide range of input and output modules to span many applications, from high-speed digital to process control. The ControlLogix architecture uses Producer/Consumer technology, which allows input information and output status to be shared among multiple ControlLogix controllers.

Summary of Changes

This publication contains new and updated information as indicated in the following table.

| Topic | Page |
|---|-------------|
| Updated technical specifications for the 1756-IH16ISOE modules | 70 |
| Updated 1756-IF8, 1756-IF8K section to include Series B module information | 151 |
| Updated 1756-IF16, 1756-IF16K section to include Series B module information | 161 |
| Updated technical and environmental specifications for the 1756-IRT8I, 1756-IRT8IK Series B modules | 166 |
| Updated technical and environmental specifications for the 1756-IR12, 1756-IR12K Series B modules | 172 |
| Updated technical and environmental specifications for the 1756-IT16, 1756-IT16K Series B modules | 176 |
| Updated 1756-OF4, 1756-OF4K section to include Series B module information | 181 |
| Updated 1756-OF8, 1756-OF8K section to include Series B module information | 185 |
| Updated 1756-IF8H, 1756-IF8HK section to include Series B module information | 193 |
| Updated 1756-IF16H, 1756-IF16HK section to include Series B module information | 199 |

Rockwell Automation recognizes that some of the terms that are currently used in our industry and in this publication are not in alignment with the movement toward inclusive language in technology. We are proactively collaborating with industry peers to find alternatives to such terms and making changes to our products and content. Please excuse the use of such terms in our content while we implement these changes.

Bulletin 1756 ControlLogix® chassis-based modules provide a full range of digital, diagnostic digital, analog, motion control, specialty I/O, and compute modules to meet your application needs.

ControlLogix I/O Module Accessories

Chassis and Power Supply

1756 ControlLogix I/O modules must be mounted in a ControlLogix chassis and each chassis requires a power supply. For more information about the 1756 Chassis and Power Supply options available for your system, see [page 235](#).

Standard I/O Module Wiring

1756 ControlLogix standard I/O modules require either a Removable Terminal Block (RTB) or a 1492 interface module (IFM) to connect all field-side wiring. RTBs and IFMs are not included with the I/O modules. They must be ordered separately. For more information about the RTBs and IFMs available for your system, see [page 235](#) and [page 236](#).

Safety I/O Module Wiring

1756 ControlLogix safety I/O modules require either a specific Removable Terminal Block (RTB) or 1492 interface module (IFM) to connect all field-side wiring.

- 1756-IB16S and 1756-IB16SK (1756 ControlLogix 16-point Sinking Safety Input Modules) have been agency certified using only the ControlLogix RTBs (1756-TBCHS or 1756-TBS6HS).
- 1756-OBV8S and 1756-OBV8SK (ControlLogix 8-point Safety Bipolar/Sourcing Output Modules) have been agency certified using only the ControlLogix RTBs (1756-TBNHS and 1756-TBSHS).
- For information about the IFM module wiring systems that have been tested for use with 1756 Safety I/O modules, see Knowledgebase Technote, [1492 IFM Modules, Cables and Wiring Diagrams for 1756-IB16S, 1756-OBV8S Safety I/O Modules](#).

RTBs and IFMs are not included with the I/O modules. They must be ordered separately. For more information about the RTBs and IFMs available for your system, see [page 235](#) and [page 236](#).

Any application that requires agency certification of the ControlLogix system by using other wiring termination methods may require application-specific approval by the certifying agency.

Available 1756 I/O Modules

Certain I/O module catalog numbers contain characters at the **end** of the catalog number that indicate additional features.



| Character | I/O Type | Description |
|-----------|-----------------------|--|
| D | Diagnostic | These modules provide diagnostic features to the point level. |
| E | Electronic fusing | These modules have internal electronic fusing to help prevent too much current from flowing through the module. |
| I | Individually isolated | These modules have individually isolated inputs or outputs. |
| K | Conformal coated | These modules have conformal coating that adds a layer of protection when exposed to harsh, corrosive environments. |
| H | HART interface | These modules send and receive digital information across analog wires between smart devices and control or monitoring systems data using HART (Highway Addressable Remote Transducer) protocol. |
| S | Scheduled or Safety | These modules offer time-scheduled output control or ensure that ControlLogix control systems operate safely. |
| SOE | Sequence of Events | These modules offer sub-millisecond time-stamping on a per point basis. |

Available 1756 I/O Modules

| Module Type | Input Module Catalog Number | Page | Output Module Catalog Number | Page |
|------------------------|---------------------------------|------|---------------------------------|---------------------|
| AC Digital I/O Modules | 1756-IA8D | 5 | 1756-OA8 | 23 |
| | 1756-IA16, 1756-IA16K | 8 | 1756-OA8D | 26 |
| | 1756-IA16I, 1756-IA16IK | 11 | 1756-OA8E | 29 |
| | 1756-IA32, 1756-IA32K | 14 | 1756-OA16, 1756-OA16K | 32 |
| | 1756-IM16I, 1756-IM16IK | 17 | 1756-OA16I, 1756-OA16IK | 36 |
| | 1756-IN16 | 20 | 1756-ON8 | 39 |
| DC Digital I/O Modules | 1756-IB16, 1756-IB16K | 43 | 1756-OB8 | 79 |
| | 1756-IB16D, 1756-IB16DK | 46 | 1756-OB8EI | 82 |
| | 1756-IB16I, 1756-IB16IK | 49 | 1756-OB16D, 1756-OB16DK | 85 |
| | 1756-IB16IF, 1756-IB16IFK | 52 | 1756-OB16E, 1756-OB16EK | 88 |
| | 1756-IB16ISOE, 1756-IB16ISOEK | 55 | 1756-OB16I | 92 |
| | 1756-IB32, 1756-IB32K | 58 | 1756-OB16IEF, 1756-OB16IEFK | 95 |
| | 1756-IC16 | 61 | 1756-OB16IEFS | 99 |
| | 1756-IG16 | 64 | 1756-OB16IS | 103 |
| | 1756-IH16I | 67 | 1756-OB32, 1756-OB32K | 106 |
| | 1756-IH16ISOE | 70 | 1756-OC8 | 109 |
| | 1756-IV16, 1756-IV16K | 73 | 1756-OG16 | 112 |
| | 1756-IV32, 1756-IV32K | 76 | 1756-OH8I | 115 |
| | | | 1756-OV16E | 118 |
| | | | 1756-OV32E | 122 |
| Safety I/O Modules | 1756-IB16S, 1756-IB16SK | 125 | 1756-OBV8S, 1756-OBV8SK | 132 |
| Contact I/O Modules | | | 1756-OX8I | 141 |
| | | | 1756-OW16I | 144 |
| Analog I/O Modules | 1756-IF4FXOF2F, 1756-IF4FXOF2FK | 147 | 1756-OF4, 1756-OF4K | 181 |
| | 1756-IF8, 1756-IF8K | 151 | 1756-OF8, 1756-OF8K | 185 |
| | 1756-IF8I, 1756-IF8IK | 156 | 1756-OF8I, 1756-OF8IK | 189 |
| | 1756-IF16, 1756-IF16K | 161 | | |
| | 1756-IRT8I, 1756-IRT8IK | 166 | | |
| | 1756-IR12, 1756-IR12K | 172 | | |
| | 1756-IT16, 1756-IT16K | 176 | | |
| HART I/O Modules | 1756-IF8H, 1756-IF8HK | 193 | 1756-OF8H, 1756-OF8HK | 205 |
| | 1756-IF8IH, 1756-IF8IHK | 196 | 1756-OF8IH, 1756-OF8IHK | 208 |
| | 1756-IF16H, 1756-IF16HK | 199 | | |
| | 1756-IF16IH, 1756-IF16IHK | 202 | | |
| Specialty I/O Modules | 1756-CFM | 211 | 1756-LSC8XIB8I, 1756-LSC8XIB8IK | 225 |
| | 1756-CMS1B1, 1756-CMS1C1 | 217 | 1756-PLS | 229 |
| | 1756-HSC | 219 | | |

1756-IA8D

ControlLogix® 120V AC diagnostic input module

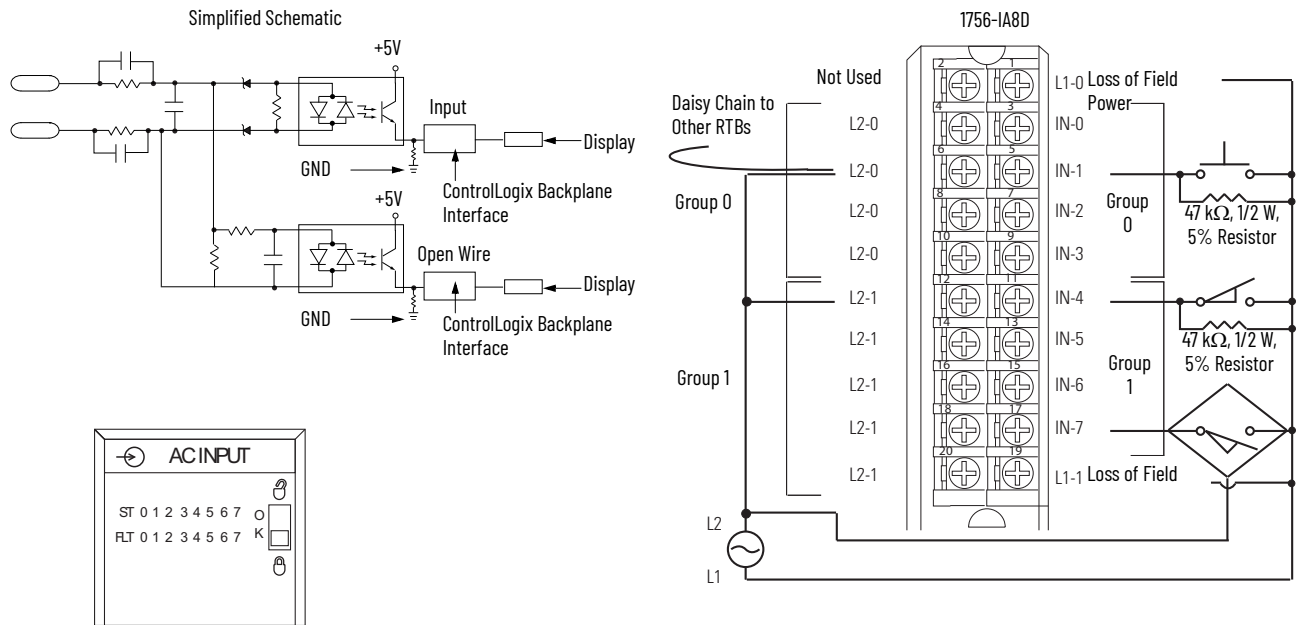

Diagnostic Specifications

| Attribute | 1756-IA8D |
|---------------------------|--------------------------------------|
| Open wire | Off-state leakage current 1.5 mA min |
| Loss of power | Transition range 46...85V AC |
| Time stamp of diagnostics | ±1 ms |

Technical Specifications

| Attribute | 1756-IA8D |
|--|--|
| Inputs | Eight diagnostic (4 points/group) |
| Operating voltage range ⁽¹⁾ | 79...132V AC, 47...63 Hz |
| Input delay time (screw to backplane) | Hardware delay: 10 ms max + filter time |
| Off to On | User-selectable filter time: 1 ms or 2 ms |
| On to Off | Hardware delay: 8 ms max + filter time |
| | User-selectable filter time: 9 ms or 18 ms |
| Current draw @ 5.1V | 100 mA |
| Current draw @ 24V | 3 mA |
| Total backplane power | 0.58 W |
| Power dissipation, max | 4.5 W @ 60 °C (140 °F) |
| Thermal dissipation | 15.35 BTU/hr |
| Off-state voltage, max | 20V |
| Off-state current, max | 2.5 mA |
| On-state current, min | 5 mA @ 74V AC |
| On-state current, max | 16 mA @ 132V AC |
| Inrush current, max | 250 mA |
| Input impedance, max | 8.25 kΩ @ 132V AC, 60 Hz |

Technical Specifications (Continued)

| Attribute | 1756-IA8D |
|----------------------------------|---|
| Cyclic update time | 200 μ s...750 ms |
| Change of state | Software configurable |
| Time stamp of inputs | \pm 200 μ s |
| Isolation voltage | 125V (continuous), basic insulation type, inputs to backplane, and input group-to-group No isolation between individual group inputs |
| Module keying | Electronic, software configurable |
| Removable terminal block housing | 1756-TBNH 1756-TBSH |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽²⁾ - on signal ports |
| Enclosure type | None (open-style) |
| North American temperature code | T4A |

(1) UL certification for 120V 50/60 Hz nominal. Rockwell Automation specified to 74...132V, 47...63 Hz.

(2) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IA8D |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | \pm 4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | \pm 1 kV line-line (DM) and \pm 2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IA8D |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> • EN 61326-1; Meas./Control/Lab., Industrial Requirements • EN 61000-6-2; Industrial Immunity • EN 61000-6-4; Industrial Emissions • EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> • 2016 No. 1091, Electromagnetic Compatibility Regulations • 2016 No. 1101, Electrical Equipment (Safety) Regulations • 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations • 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> • Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension • Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IA16, 1756-IA16K

ControlLogix 120V AC input module

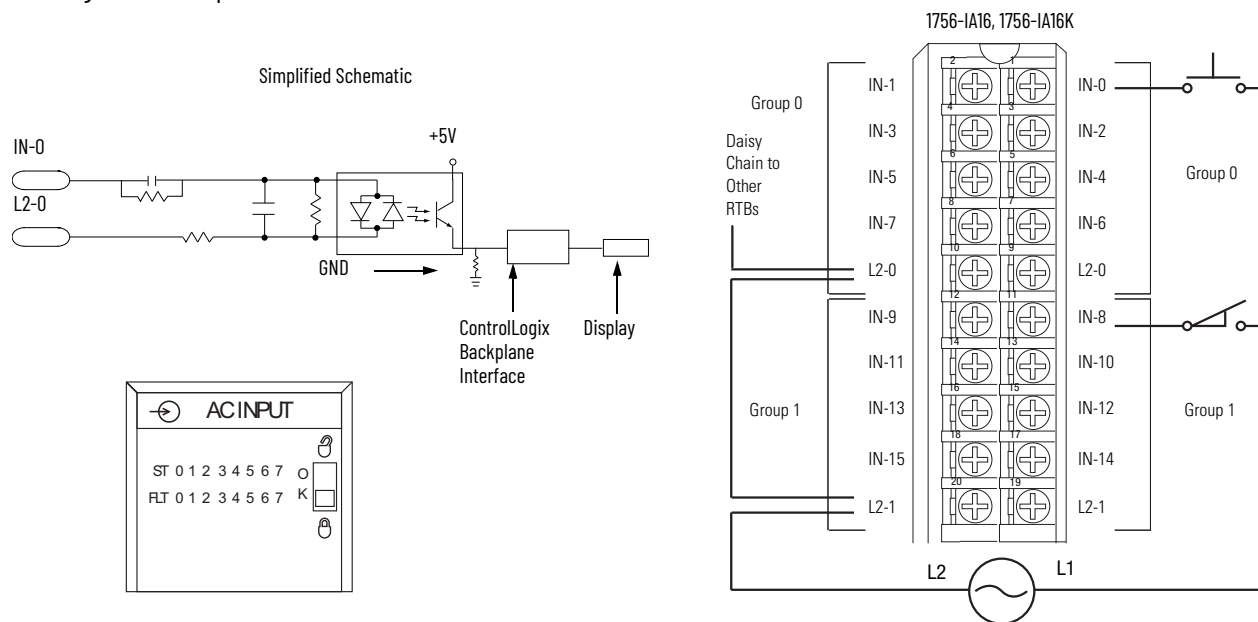

Technical Specifications

| Attribute | 1756-IA16, 1756-IA16K |
|--|---|
| Inputs | 16 (8 points/group) |
| Voltage category | 120V AC 50/60 Hz |
| Operating voltage range ⁽¹⁾ | 74...132V AC, 47...63 Hz |
| Input delay time (screw to backplane) | |
| Off to On | Hardware delay: 10 ms max + filter time User-selectable filter time: 1 ms or 2 ms |
| On to Off | Hardware delay: 8 ms max + filter time User-selectable filter time: 9 ms or 18 ms |
| Current draw @ 5.1V | 100 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 0.58 W |
| Power dissipation, max | 5.8 W @ 60 °C (140 °F) |
| Thermal dissipation | 18.41 BTU/hr |
| Off-state voltage, max | 20V |
| Off-state current, max | 2.5 mA |
| On-state current, min | 5 mA @ 74V AC |
| On-state current, max | 13 mA @ 132V AC |
| Inrush current, max | 250 mA peak (decaying to <37% in 22 ms, without activation) |
| Input impedance, max | 10.15 kΩ @ 132V AC, 60 Hz |
| Cyclic update time | 200 μs...750 ms |
| Change of state | Software configurable |
| Time stamp of inputs | ±200 μs |
| Isolation voltage | 125V (continuous), basic insulation type, inputs-to-backplane, and input group-to-group No isolation between individual group inputs |
| Module keying | Electronic, software configurable |
| Removable terminal block housing | 1756-TBNH 1756-TBSH |
| RTB keying | User-defined mechanical |
| Slot width | 1 |

Technical Specifications (Continued)

| Attribute | 1756-IA16, 1756-IA16K |
|---------------------------------|-----------------------|
| Wire category | 1 ⁽²⁾ |
| Enclosure type | None (open-style) |
| North American temperature code | T4 |

(1) UL certification for 120V 50/60 Hz nominal. Rockwell Automation specified to 74...132V, 47...63 Hz.

(2) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IA16, 1756-IA16K |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |
| Oscillatory surge withstand IEEE C37.90.1 | 3 kV |

Certifications


| Certification (when product is marked) ⁽¹⁾ | 1756-IA16, 1756-IA16K |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> • EN 61326-1; Meas./Control/Lab., Industrial Requirements • EN 61000-6-2; Industrial Immunity • EN 61000-6-4; Industrial Emissions • EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> • 2016 No. 1091, Electromagnetic Compatibility Regulations • 2016 No. 1101, Electrical Equipment (Safety) Regulations • 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations • 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> • Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension • Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.


1756-IA16I, 1756-IA16IK

ControlLogix 120V AC isolated input module


Simplified Schematic

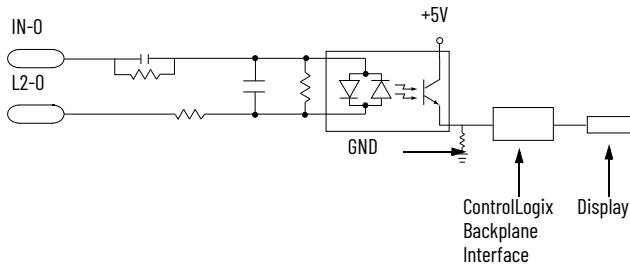


Additional jumper bars are available as catalog number 1756-JMPR.





Isolated Wiring



Nonisolated Wiring



1756-IA16I, 1756-IA16IK

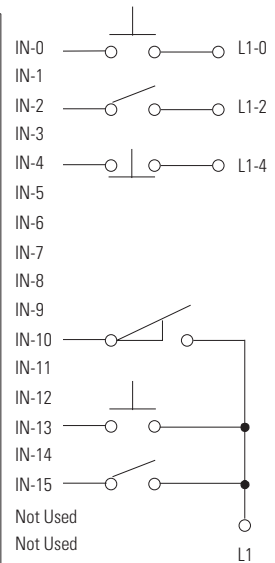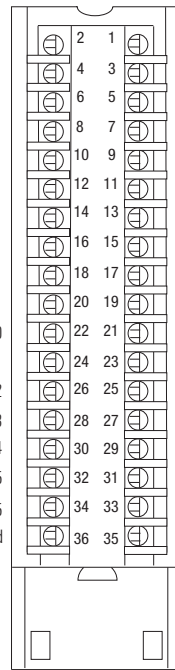

Technical Specifications

| Attribute | 1756-IA16I, 1756-IA16IK |
|--|--|
| Inputs | 16 individually isolated |
| Voltage category | 120V AC 50/60 Hz |
| Operating voltage range ⁽¹⁾ | 79...132V AC, 47...63 Hz |
| Input voltage, nom | 120V AC 50/60 Hz |
| Input delay time (screw to backplane) Off to On | Hardware delay: 10 ms max + filter time User-selectable filter time: 1 ms or 2 ms |
| On to Off | Hardware delay: 8 ms max + filter time User-selectable filter time: 9 ms or 18 ms |
| Current draw @ 5.1V | 125 mA |
| Current draw @ 24V | 3 mA |
| Total backplane power | 0.71 W |
| Power dissipation, max | 4.9 W @ 60 °C (140 °F) |
| Thermal dissipation | 16.71 BTU/hr |
| Off-state voltage, max | 20V |
| Off-state current, max | 2.5 mA |
| On-state current, min | 5 mA @ 79V AC, 47...63 Hz |
| On-state current, max | 15 mA @ 132V AC, 47...63 Hz |
| Inrush current, max | 250 mA |
| Input impedance, max | 8.8 kΩ @ 132V AC, 60 Hz |
| Cyclic update time | 200 μs...750 ms |
| Change of state | Software configurable |

Technical Specifications (Continued)

| Attribute | 1756-IA16I, 1756-IA16IK |
|----------------------------------|---|
| Time stamp of inputs | ±200 µs |
| Isolation voltage | 125V (continuous), basic insulation type, inputs-to-backplane, and input-to-input |
| Module keying | Electronic, software configurable |
| Removable terminal block housing | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category ⁽²⁾ | 1 - on signal ports |
| Enclosure type | None (open-style) |
| North American temperature code | T4A |

(1) UL certification for 120V 50/60 Hz nominal. Rockwell Automation specified to 74...132V, 47...63 Hz.

(2) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IA16I, 1756-IA16IK |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |
| Oscillatory surge withstand IEEE C37.90.1 | 3 kV |



Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IA16I, 1756-IA16IK |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> • EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) • EN 61326-1; Meas./Control/Lab., Industrial Requirements • EN 61000-6-2; Industrial Immunity • EN 61000-6-4; Industrial Emissions European Union 2014/35/EU LVD Directive, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> • 2016 No. 1091, Electromagnetic Compatibility Regulations • 2016 No. 1101, Electrical Equipment (Safety) Regulations • 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations • 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> • Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension • Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IA32, 1756-IA32K

ControlLogix AC (74...132V) input module

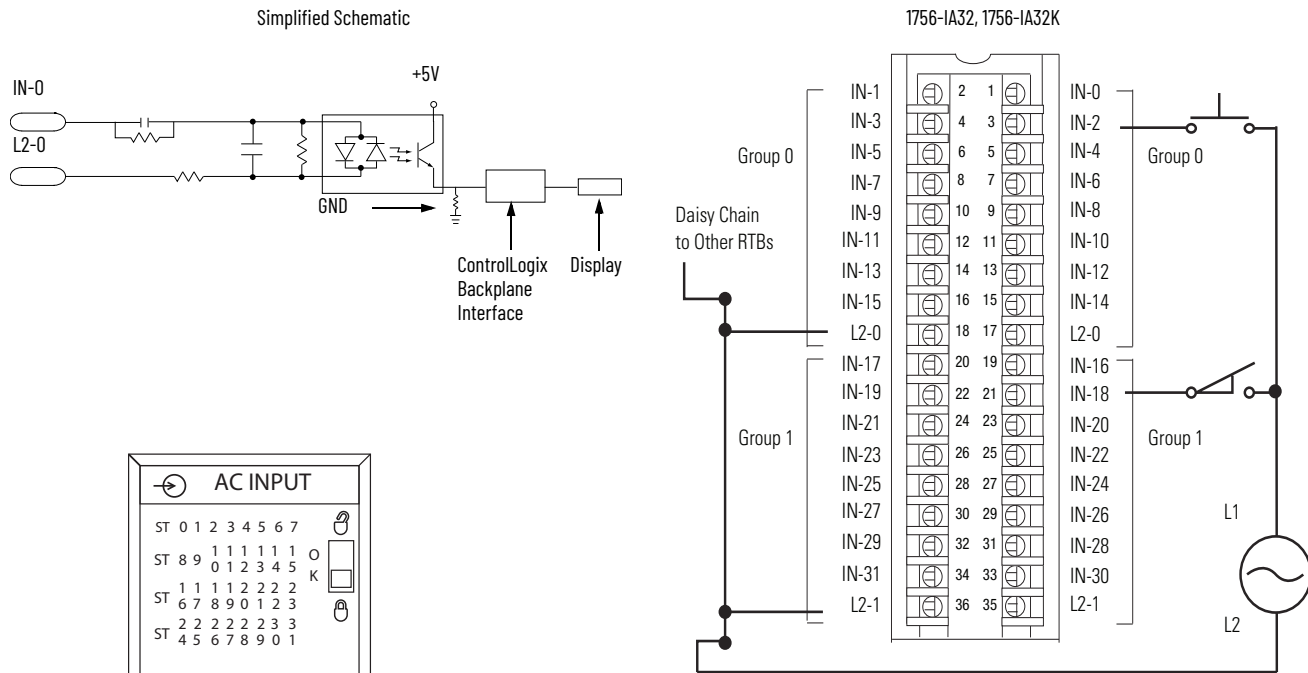

Technical Specifications

| Attribute | 1756-IA32, 1756-IA32K |
|--|---|
| Inputs | 32 (16 points/group) |
| Voltage category | 120V AC 50/60 Hz |
| Operating voltage range | 74...132V AC, 47...63 Hz |
| Input voltage, nom | 120V AC 50/60 Hz |
| Input delay time (screw to backplane) Off to On | Hardware delay: 1.5 ms nom/10 ms max + filter time User-selectable filter time: 1 ms or 2 ms |
| On to Off | Hardware delay: 1 ms nom/8 ms max + filter time User-selectable filter time: 9 ms or 18 ms |
| Current draw @ 5.1V | 165 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 0.9 W |
| Power dissipation, max | 6.1 W @ 60 °C (140 °F) |
| Thermal dissipation | 20.8 BTU/hr |
| Off-state voltage, max | 20V |
| Off-state current, max | 2.5 mA |
| On-state current, min | 5 mA @ 74V AC |
| On-state current, max | 15 mA @ 132V AC |
| Inrush current, max | 390 mA |
| Input impedance, max | 14.0 kΩ @ 132V AC, 60 Hz |
| Cyclic update time | 200 μs...750 ms |
| Change of stat | Software configurable |
| Time stamp of inputs | ±200 μs |
| Isolation voltage | 250V (continuous), basic insulation type, inputs-to-backplane 125V (continuous), basic insulation type, input group-to-group No isolation between individual group inputs |
| Module keying | Electronic, software configurable |

Technical Specifications (Continued)

| Attribute | 1756-IA32, 1756-IA32K |
|----------------------------------|-------------------------|
| Removable terminal block housing | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category ⁽¹⁾ | 1 - on signal ports |
| Enclosure type | None (open-style) |
| North American temperature code | T4 |

(1) Use this Conductor Category information for planning conductor routing. See Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IA32, 1756-IA32K |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |

Certifications


| Certification (when product is marked) ⁽¹⁾ | 1756-IA32, 1756-IA32K |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> • EN 61326-1; Meas./Control/Lab., Industrial Requirements • EN 61000-6-2; Industrial Immunity • EN 61000-6-4; Industrial Emissions • EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> • 2016 No. 1091, Electromagnetic Compatibility Regulations • 2016 No. 1101, Electrical Equipment (Safety) Regulations • 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations • 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> • Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension • Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.


1756-IM16I, 1756-IM16IK

ControlLogix 240V AC input module


Simplified Schematic

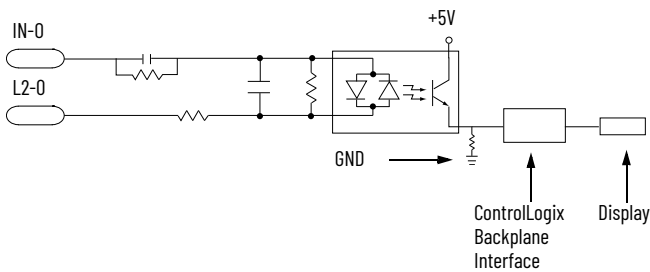

Additional jumper bars are available as catalog number 1756-JMPR.



1756-IM16I, 1756-IM16IK

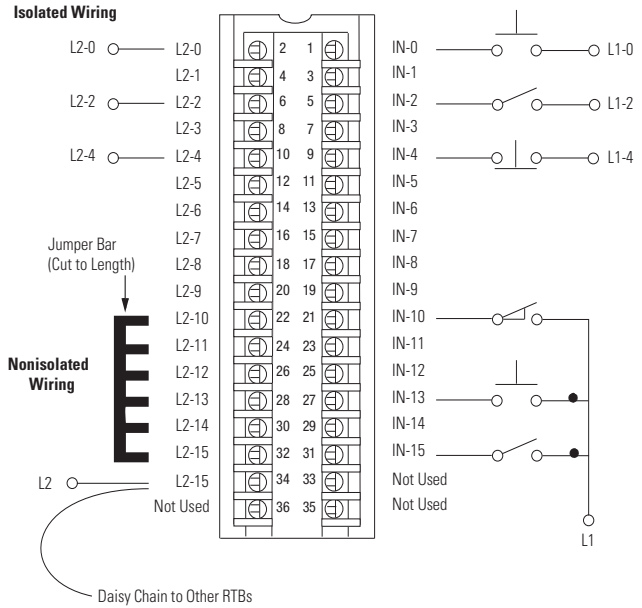

Technical Specifications

| Attribute | 1756-IM16I, 1756-IM16IK |
|--|---|
| Inputs | 16 individually isolated |
| Voltage category | 240V AC 50/60 Hz |
| Operating voltage range | 159...265V AC, 47...63 Hz ⁽¹⁾ |
| Input voltage, nom | 240V AC 50/60 Hz |
| Input delay time (screw to backplane) Off to On | Hardware delay: 10 ms max + filter time User-selectable filter time: 1 ms or 2 ms |
| Onto Off | Hardware delay: 8 ms max + filter time User-selectable filter time: 9 ms or 18 ms |
| Current draw @ 5.1V | 100 mA |
| Current draw @ 24V | 3 mA |
| Total backplane power | 0.58 W |
| Power dissipation, max | 5.8 W @ 60 °C (140 °F) |
| Thermal dissipation | 19.78 BTU/hr |
| Off-state voltage, max | 40V |
| Off-state current, max | 2.5 mA |
| On-state current, min | 5 mA @ 159V AC, 60 Hz |
| On-state current, max | 13 mA @ 265V AC, 60 Hz |
| On-state voltage | 159...265V AC, 47...63Hz @ 30 °C (86 °F) all channels ON 159...265V AC, 47...63Hz @ 40 °C (104 °F) 8 points ON 159...253V AC, 47...63Hz @ 45 °C (113 °F) all channels ON 159...242V AC, 47...63Hz @ 60 °C (140 °F) all channels ON |

Technical Specifications (Continued)

| Attribute | 1756-IM16I, 1756-IM16IK |
|----------------------------------|---|
| Inrush current, max | 250 mA |
| Input impedance, max | 20.38 k Ω @ 265V AC, 60 Hz |
| Cyclic update time | 200 μ s...750 ms |
| Change of state | Software configurable |
| Time stamp of inputs | \pm 200 μ s |
| Isolation voltage | 250V (continuous), basic insulation type, inputs-to-backplane, and input-to-input |
| Module keying | Electronic, software configurable |
| Removable terminal block housing | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category ⁽²⁾ | 1 - on signal ports 1 - on power ports |
| Enclosure type | None (open-style) |
| North American temperature code | T4 |

(1) UL certification for 240V 50/60 Hz nominal. Rockwell Automation specified to the following:

159...265V AC, 47...63Hz @ 30 °C (86 °F) all channels on
159...265V AC, 47...63Hz @ 40 °C (104 °F) 8 points on
159...253V AC, 47...63Hz @ 45 °C (113 °F) all channels on
159...242V AC, 47...63Hz @ 60 °C (140 °F) all channels on.

(2) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IM16I, 1756-IM16IK |
|--|---|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM 30...1000 MHz 10V/m with 200 Hz 50% Pulse 100% AM at 900 MHz |
| EFT/B immunity IEC 61000-4-4 | \pm 4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | \pm 1 kV line-line (DM) and \pm 2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IM16I, 1756-IM16IK |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 89/336/EEC EMC Directive, compliant with: <ul style="list-style-type: none"> • EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) • EN 61326-1; Meas./Control/Lab., Industrial Requirements • EN 61000-6-2; Industrial Immunity • EN 61000-6-4; Industrial Emissions European Union 2014/35/EU LVD Directive, compliant with: <ul style="list-style-type: none"> • EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> • 2016 No. 1091, Electromagnetic Compatibility Regulations • 2016 No. 1101, Electrical Equipment (Safety) Regulations • 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations • 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> • Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension • Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IN16

ControlLogix AC (10...30V) input module

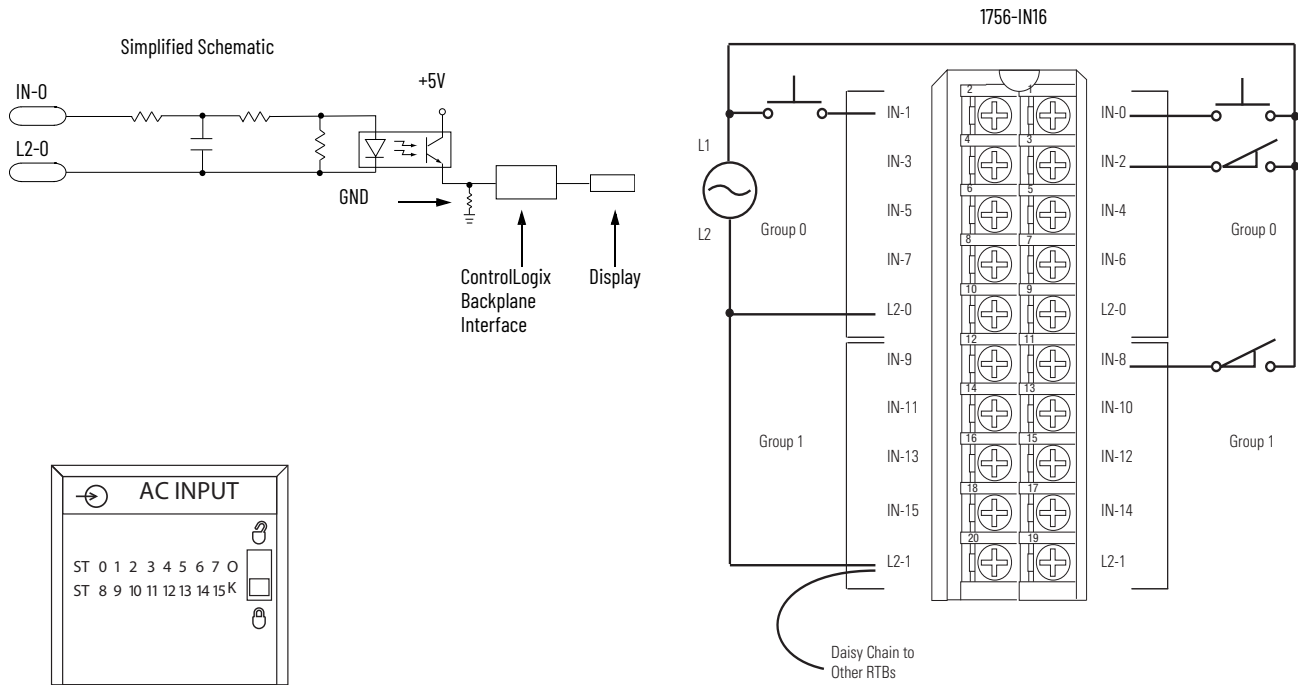

Technical Specifications

| Attribute | 1756-IN16 |
|--|---|
| Inputs | 16 (8 points/group) |
| Voltage category | 24V AC 50/60 Hz |
| Operating voltage range | 10...30V AC, 47...63 Hz |
| Input voltage, nom | 24V AC 50/60 Hz |
| Voltage and current ratings | Backplane: 5.1V DC, 135 mA 24V DC, 2 mA Inputs: 10...30V AC, 50/60Hz 25 mA max |
| Input delay time (screw to backplane) Off to On | Hardware delay: 10 ms max + filter time User-selectable filter time: 0 ms, 1 ms, or 2 ms |
| On to Off | Hardware delay: 10 ms max + filter time User-selectable filter time: 9 ms or 18 ms |
| Current draw @ 5.1V | 135 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 0.56 W |
| Power dissipation, max | 5.1 W @ 60 °C (140 °F) |
| Thermal dissipation | 17.39 BTU/hr |
| Off-state voltage, max | 5V |
| Off-state current, max | 2.75 mA |
| On-state current, min | 5 mA @ 10V AC, 60 Hz |
| On-state current, max | 21 mA @ 30V AC, 60 Hz |
| Inrush current, max | 250 mA |
| Input impedance, max | 2.5 kΩ @ 30V AC, 60 Hz |
| Cyclic update time | 200 μs...750 ms |
| Change of state | Software configurable |
| Time stamp of inputs | ±200 μs |

Technical Specifications (Continued)

| Attribute | 1756-IN16 |
|----------------------------------|--|
| Isolation voltage | 250V (continuous), basic insulation type, inputs-to-backplane, and input group-to-group No isolation between individual group inputs |
| Module keying | Electronic, software configurable |
| Removable terminal block housing | 1756-TBNH 1756-TBSH |
| RTB keying | User-defined mechanical |
| Wire Size | 1756-TBNH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. 1756-TBSH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. |
| Terminal block torque specs | 1756-TBNH 1.36 N•m (12 lb-in) |
| Slot width | 1 |
| Wire category ⁽¹⁾ | 1 - on signal ports |
| Enclosure type | None (open-style) |
| Temperature code | T3 |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IN16 |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0 °C < Ta < 60 °C (32 °F < Ta < 140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |





Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IN16 |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> IEC 60079-0 Edition 7; General Requirements EN 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T3 Gc UL22ATEX2820 |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0 Edition 7; General Requirements IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T3 Gc IECEX UL 22.0065 |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-0A8

ControlLogix 120/240V AC output module

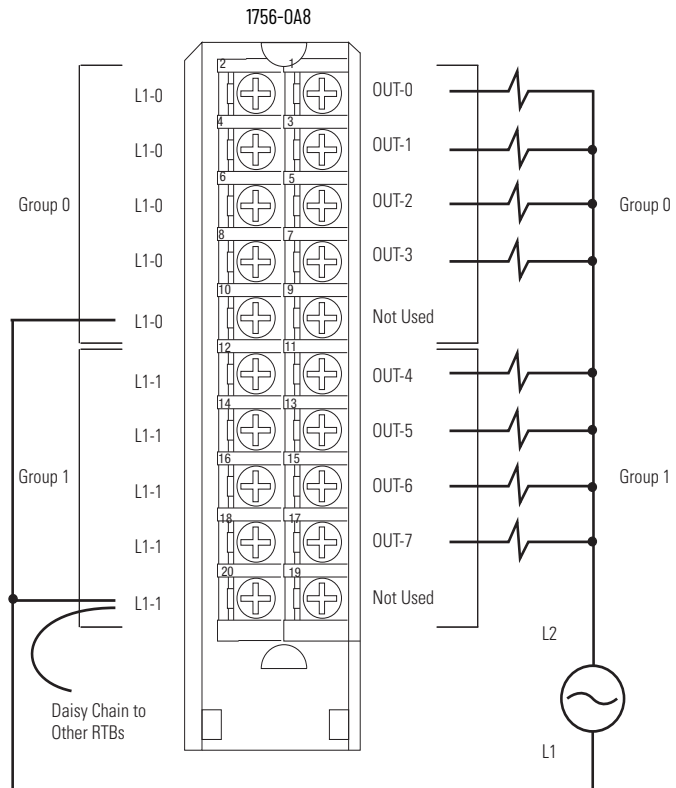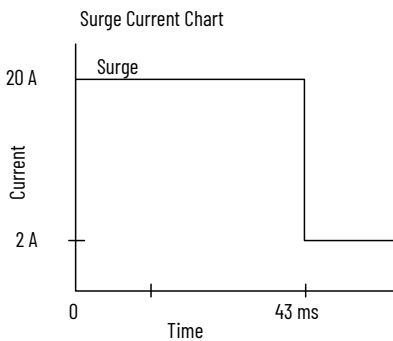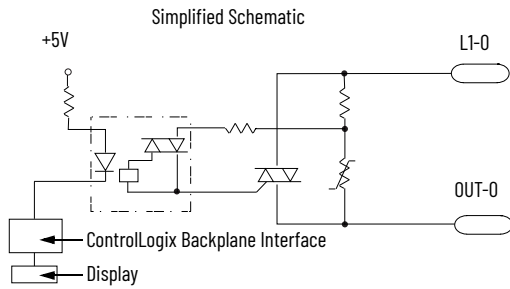

Technical Specifications

| Attribute | 1756-0A8 |
|--|---------------------------------|
| Outputs | 8 (4 points/group) |
| Pilot duty | 2 A |
| Voltage category | 120/240V AC 50/60 Hz |
| Operating voltage range ⁽¹⁾ | 74...265V AC 47...63 Hz |
| Output delay time Off to On | 9.3 ms @ 60 Hz 11 ms @ 50 Hz |
| On to Off | 9.3 ms @ 60 Hz 11 ms @ 50 Hz |
| Current draw @ 5.1V | 200 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 1.07 W |
| Power dissipation, max | 5.1 W @ 60 °C (140 °F) |
| Thermal dissipation | 17.39 BTU/hr |

Technical Specifications (Continued)

| Attribute | 1756-OA8 |
|----------------------------------|--|
| Off-state leakage current, max | 3 mA per point |
| On-state voltage drop, max | 1.5V peak @ 2 A 6V peak @ <50 mA |
| Current per point, max | 2 A @ 60 °C (140 °F) linear derating |
| Current per module, max | 5 A @ 30 °C (86 °F) linear derating 4 A @ 60 °C (140 °F) linear derating |
| Surge current per point | 20 A for 43 ms per point, repeatable every 2 s @ 60 °C (140 °F) |
| Load current, min | 10 mA per point |
| Commutating voltage | 4V/μs for loads > 50 mA 0.2V/μs for loads < 50 mA ⁽²⁾ |
| Scheduled outputs | Synchronization within 16.7 s max, reference to the Coordinated System Time |
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| States in Program mode per point | Hold last state, On or Off (Off is default) |
| Isolation voltage | 250V (continuous), basic insulation type, outputs-to-backplane, and output group-to-group No isolation between individual group outputs |
| Inhibit voltage, max | Zero crossing 60V peak |
| Module keying | Electronic, software configurable |
| Fusing | Not protected. A fused IFM is recommended to help protect outputs |
| Removable terminal block | 1756-TBNH 1756-TBSH |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽³⁾ |
| Enclosure type | None (open style) |
| North American temperature code | T4A |

(1) UL certification for 120/240V 50/60 Hz nominal. Rockwell Automation specified to 74...265, 47...63 Hz.

(2) The commutating dv/dt of the output voltage (OUTPUT to L2) should not exceed 0.2V/μs for loads under 50 mA. The commutating dv/dt rating of the module for loads 50...500 mA (OUTPUT to L2) is 4V/μs maximum. If the commutating dv/dt rating of the TRIAC is exceeded, the TRIAC could latch on. If the commutating dv/dt rating is exceeded in the 10...50 mA range, a resistor can be added across the output and L2. The purpose of this resistor is to increase the total output current to 50 mA ($I=V/R$). At 50 mA and above, the module has a higher commutating dv/dt rating. When adding a resistor for the output to L2, be sure it is rated for the power that it dissipates ($P=V^2/R$). If the commutating dv/dt rating is exceeded in the 50...500 mA range, the L1 AC waveform could be at fault. Be sure that the waveform is a good sinusoid, void of any anomalies such as distorted, or flattened sections.

(3) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-OA8 |
|--|------------------------------|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |

Environmental Specifications (Continued)

| Attribute | 1756-OA8 |
|---|--|
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |




Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-OA8 |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-0A8D

ControlLogix 120V AC diagnostic output module

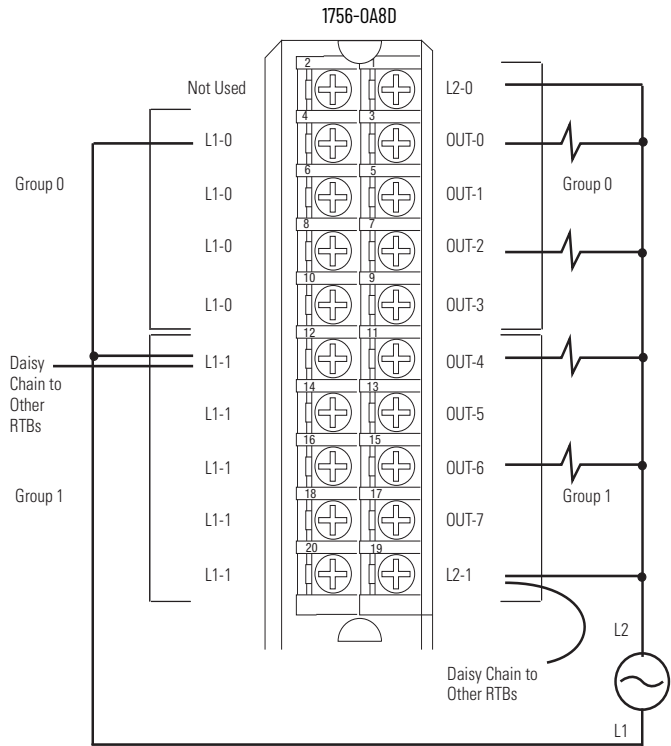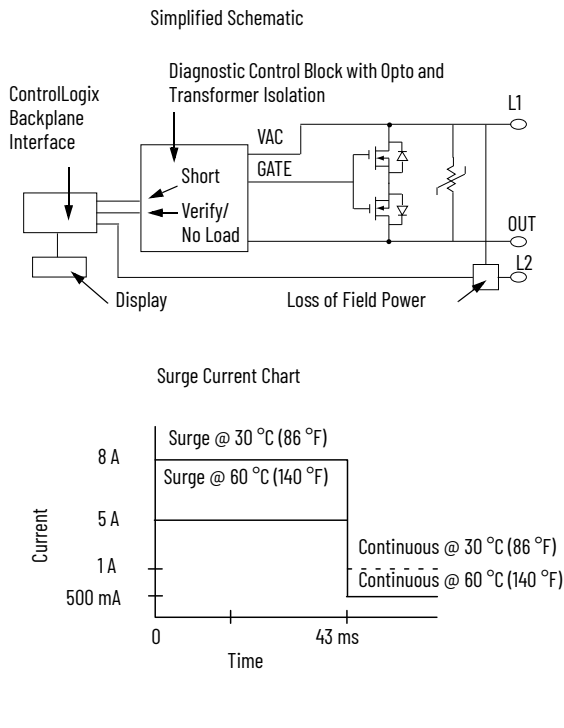

Diagnostic Specifications

| Attribute | 1756-0A8D |
|-------------------------------|---|
| Short trip, min | 12 A for 500 μ s |
| No load | Off-state detection only |
| Output verification | On-state detection only |
| Pulse test | Configurable maximum width and max time delay from zero cross |
| Field power loss (zero cross) | Detects at 25V peak min (firmware phase locked loop) |
| Time stamp of diagnostics | \pm 1 ms |

Technical Specifications

| Attribute | 1756-0A8D |
|--|--|
| Outputs | 8 diagnostic, electronic fusing (4 points/group) |
| Voltage category | 120V AC 50/60 Hz |
| Operating voltage range ⁽¹⁾ | 74...132V AC 47...63 Hz |
| Output delay time Off to On | 9.3 ms @ 60 Hz 11 ms @ 50 Hz |
| On to Off | 9.3 ms @ 60 Hz 11 ms @ 50 Hz |
| Current draw @ 5.1V | 175 mA |
| Current draw @ 24V | 250 mA |
| Total backplane power | 6.89 W |
| Power dissipation, max | 5.3 W @ 60 °C (140 °F) |
| Thermal dissipation | 18.0 BTU/hr |
| Off-state leakage current, max | 3 mA per point |
| On-state voltage drop, max | 2.5V peak @ 0.5 A 3V peak @ 1 A |
| Current per point, max | 1 A @ 30 °C (86 °F) linear derating 0.5 A @ 60 °C (140 °F) linear derating |
| Current per module, max | 8 A @ 30 °C (86 °F) linear derating 4 A @ 60 °C (140 °F) linear derating |
| Surge current per point | 8 A for 43 ms per point, repeatable every 2 s @ 30 °C (86 °F) 5 A for 43 ms per point, repeatable every 1 s @ 60 °C (140 °F) |
| Load current, min | 10 mA per point |
| Scheduled outputs | Synchronization within 16.7 s max, reference to the Coordinated System Time |
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| States in Program mode per point | Hold last state, On or Off (Off is default) |
| Isolation voltage | 125V (continuous), basic insulation type, outputs-to-backplane, and output group-to-group No isolation between individual group outputs |
| Inhibit voltage, max | Zero crossing 25V peak |
| Module keying | Electronic, software configurable |
| Fusing | Electronically fused per point |
| Removable terminal block | 1756-TBNH 1756-TBSH |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire size | 1756-TBNH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. 1756-TBSH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. |
| Wire category ⁽²⁾ | 1 - on signal ports |
| Enclosure type | None (open style) |
| North American temperature code | T4A |

(1) UL certification for 120V 50/60 Hz nominal. Rockwell Automation specified to 74...132V, 47...63 Hz.

(2) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-0A8D |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-0A8D |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-0A8E

ControlLogix 120V AC electronically fused output module

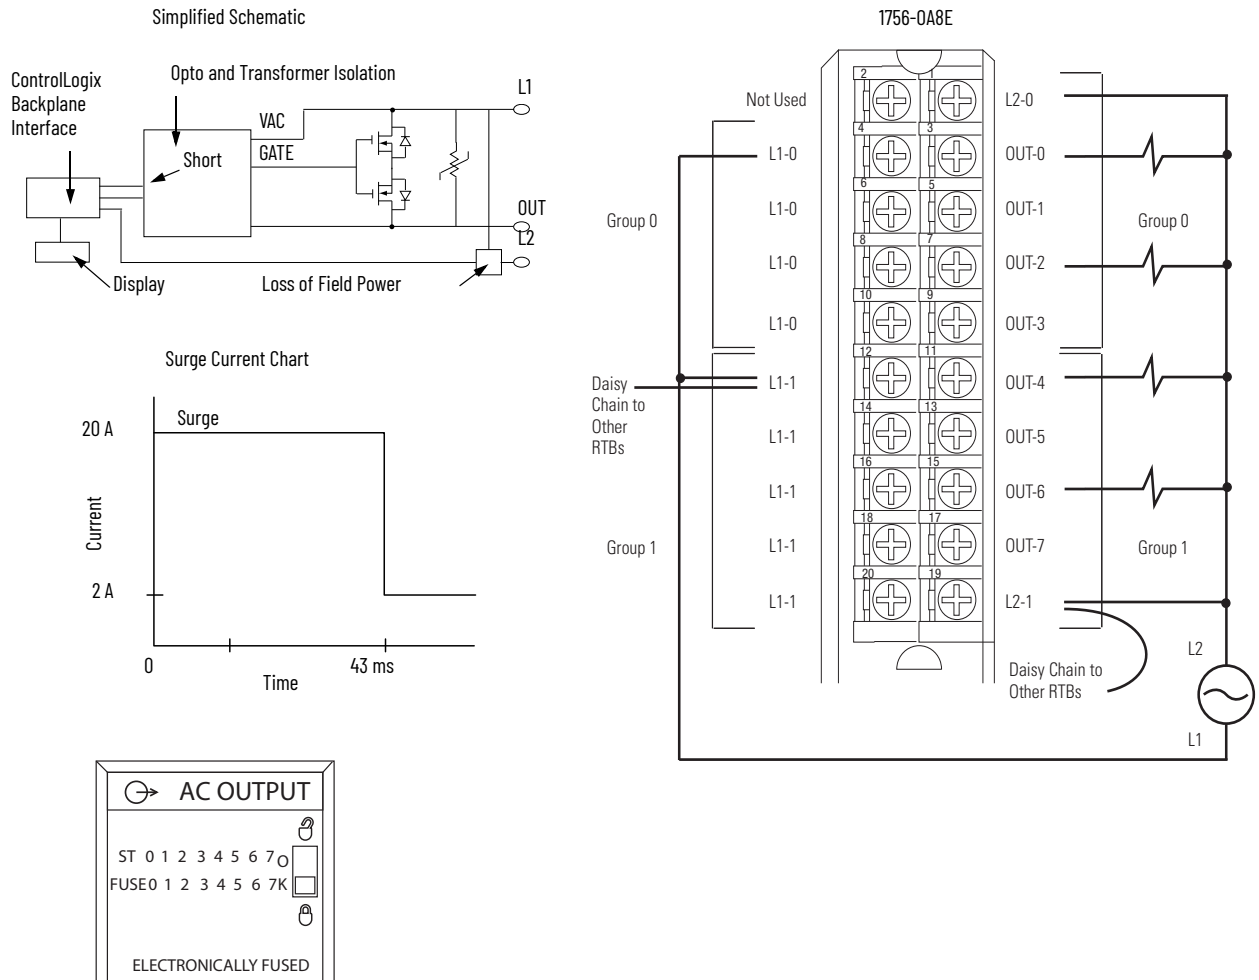

Diagnostic Specifications

| Attribute | 1756-0A8E |
|-------------------------------|--|
| Short trip, min | >20 A for 100 ms |
| Field power loss (zero cross) | Detects at 25V peak min (firmware phase locked loop) |
| Time stamp of diagnostics | ±1 ms |

Technical Specifications

| Attribute | 1756-0A8E |
|--|--|
| Outputs | Eight electronic fusings (four points/group) |
| Pilot duty | Yes |
| Voltage category | 120V AC 50/60 Hz |
| Operating voltage range ⁽¹⁾ | 74...132V AC 47...63 Hz |
| Output delay time Off to On | 9.3 ms @ 60 Hz 11 ms @ 50 Hz |
| On to Off | 9.3 ms @ 60 Hz 11 ms @ 50 Hz |
| Current draw @ 5.1V | 200 mA |
| Current draw @ 24V | 250 mA |

Technical Specifications (Continued)

| Attribute | 1756-0A8E |
|----------------------------------|--|
| Total backplane power | 7.02 W |
| Power dissipation, max | 5.5 W @ 60 °C (140 °F) |
| Thermal dissipation | 18.76 BTU/hr |
| Off-state leakage current, max | 3 mA per point |
| On-state voltage drop, max | 4V peak @ 2 A |
| Current per point, max | 2 A @ 60 °C (140 °F) |
| Current per group, max | 4 A @ 30 °C (86 °F) linear derating 2 A @ 60 °C (140 °F) linear derating |
| Current per module, max | 8 A @ 30 °C (86 °F) linear derating 4 A @ 60 °C (140 °F) linear derating |
| Surge current per point | 20 A for 43 ms per point, repeatable every 2 s @ 60 °C (140 °F) |
| Load current, min | 10 mA per point |
| Scheduled outputs | Synchronization within 16.7 s max, reference to the Coordinated System Time |
| States in Fault mode per point | Hold last state, On or Off (default is Off) |
| States in Program mode per point | Hold last state, On or Off (default is Off) |
| Isolation voltage | 125V (continuous), basic insulation type, outputs-to-backplane, and output group-to-group No isolation between individual group outputs |
| Inhibit voltage, max | Zero crossing 25V peak |
| Module keying | Electronic, software configurable |
| Fusing | Electronically fused per point |
| Removable terminal block | 1756-TBNH 1756-TBSH |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category ⁽²⁾ | 1 - on signal ports |
| Enclosure type | None (open style) |
| North American temperature code | T4A |

(1) UL certification for 120V 50/60Hz nominal. Rockwell Automation specified to 74...132V, 47...63 Hz.

(2) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-0A8E |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM at 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM at 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |

Environmental Specifications (Continued)

| Attribute | 1756-0A8E |
|---|--|
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |





Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-0A8E |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: <ul style="list-style-type: none"> EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-0A16, 1756-0A16K

ControlLogix 120/240V AC output module

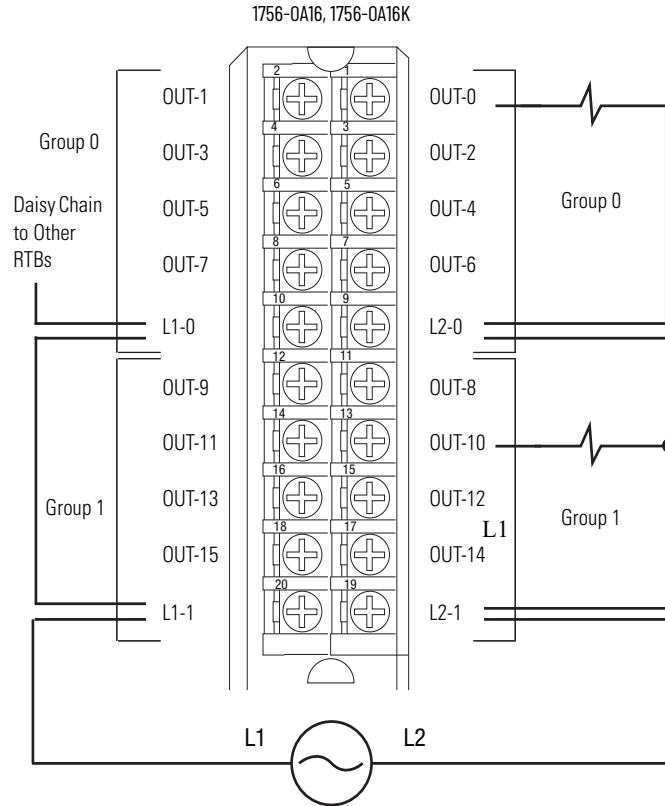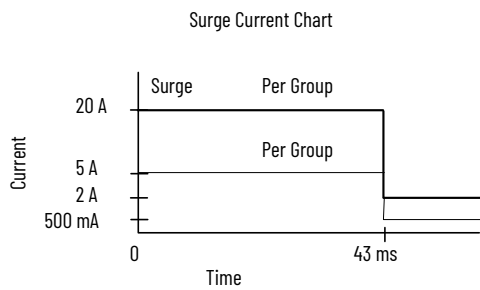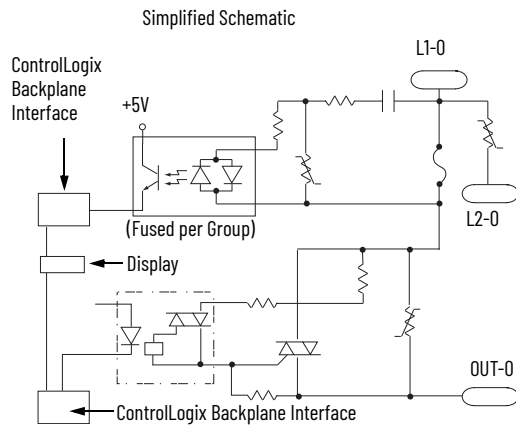

Diagnostic Specifications

| Attribute | 1756-0A16, 1756-0A16K |
|---------------------------|------------------------------|
| Time stamp of diagnostics | ±1 ms |
| Fuse blown | One fuse and indicator/group |

Technical Specifications

| Attribute | 1756-0A16, 1756-0A16K |
|--|--|
| Outputs | 16 mechanically fused/group (8 points/group) |
| Pilot duty | 0.5 A |
| Voltage category | 120/240V AC 50/60 Hz |
| Operating voltage range ⁽¹⁾ | 74...265V AC 47...63 Hz |

Technical Specifications (Continued)

| Attribute | 1756-OA16, 1756-OA16K |
|----------------------------------|--|
| Output delay time Off to On | 9.3 ms @ 60 Hz 11 ms @ 50 Hz |
| On to Off | 9.3 ms @ 60 Hz 11 ms @ 50 Hz |
| Current draw @ 5.1V | 400 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 2.1 W |
| Power dissipation, max | 6.5 W @ 60 °C (140 °F) |
| Thermal dissipation | 22.17 BTU/hr |
| Off-state leakage current, max | 3 mA per point |
| On-state voltage drop, max | 1.5V @ 0.5 A 5.7V @ load current < 50 mA |
| Current per point, max | 0.5 A @ 60 °C (140 °F) |
| Current per group, max | 2 A @ 60 °C (140 °F) |
| Current per module, max | 4 A @ 60 °C (140 °F) |
| Surge current per point | 5 A for 43 ms per point, repeatable every 2 s @ 60 °C (140 °F) |
| Surge current per group | 15 A for 43 ms per point, repeatable every 2 s @ 60 °C (140 °F) |
| Load current, min | 10 mA per point |
| Commutating voltage | 4V/μs for loads > 50 mA 0.2V/μs for loads < 50 mA ⁽²⁾ |
| Scheduled outputs | Synchronization within 16.7 s max, reference to the Coordinated System Time |
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| States in Program mode per point | Hold last state, On or Off (Off is default) |
| Isolation voltage | 250V (continuous), basic insulation type, outputs to backplane, and group to group |
| Inhibit voltage, max | Zero crossing 60V peak |
| Module keying | Electronic, software configurable |
| Fusing | Mechanically fused/group, 3.15 A @ 250V AC slow blow, 1500 A interruption current, Littelfuse p/n H2153.15 |
| Removable terminal block | 1756-TBNH 1756-TBSH |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire size | 1756-TBNH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. 1756-TBSH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. |
| Wire category ⁽³⁾ | 1 - on signal ports |
| Enclosure type | None (open style) |
| North American temperature code | T4 |

(1) UL certification for 120/240V 50/60 Hz nominal. Rockwell Automation specified to 74...265V, 47...63 Hz.

(2) The commutating dv/dt of the output voltage (OUTPUT to L2) should not exceed 0.2V/μs for loads under 50 mA. The commutating dv/dt rating of the module for loads 50...500 mA (OUTPUT to L2) is 4V/μs maximum. If the commutating dv/dt rating of the TRIAC is exceeded, the TRIAC could latch on. If the commutating dv/dt rating is exceeded in the 10...50 mA range, a resistor can be added AC across the output and L2. The purpose of this resistor is to increase the total output current to 50 mA ($I=V/R$). At 50 mA and above, the module has a higher commutating dv/dt rating. When adding a resistor for the output to L2, be sure it is rated for the power that it dissipates ($P=(V^2)/R$). If the commutating dv/dt rating is exceeded in the 50...500 mA range, the L1 AC waveform could be at fault. Be sure that the waveform is a good sinusoid, void of any anomalies such as distorted, or flattened sections.

(3) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-0A16, 1756-0A16K |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |
| Oscillatory surge withstand IEEE C37.90.1 | 3 kV |

Certifications


| Certification (when product is marked) ⁽¹⁾ | 1756-0A16, 1756-0A16K |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> • EN 61326-1; Meas./Control/Lab., Industrial Requirements • EN 61000-6-2; Industrial Immunity • EN 61000-6-4; Industrial Emissions • EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> • 2016 No. 1091, Electromagnetic Compatibility Regulations • 2016 No. 1101, Electrical Equipment (Safety) Regulations • 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations • 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> • Arrêté ministériel n° 6404-15 du 1 er muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension • Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.



1756-0A16I, 1756-0A16IK

ControlLogix 120/240V AC isolated output module

Simplified Schematic

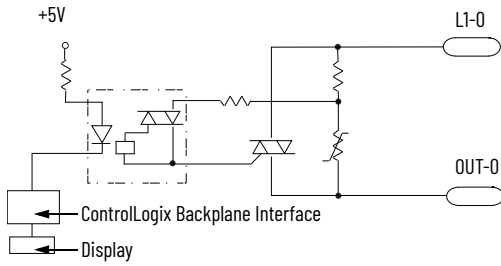


Surge Current Chart

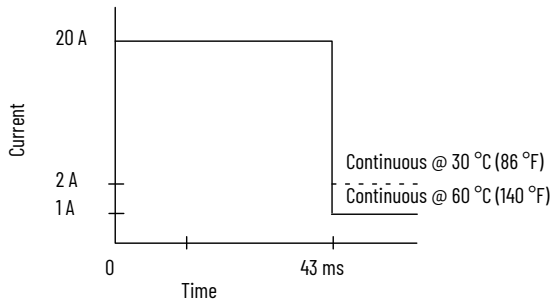

1756-0A16I, 1756-0A16IK

Isolated Wiring





Jumper Bar (Cut to Length)

Nonisolated Wiring



Daisy Chain to Other RTBs

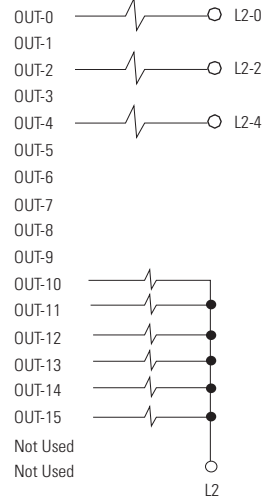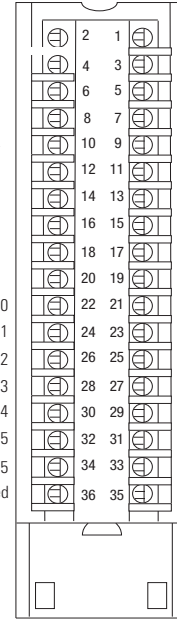

Additional jumper bars are available as catalog number 1756-JMPR.

Technical Specifications

| Attribute | 1756-0A16I, 1756-0A16IK |
|--|---|
| Outputs | 16 individually isolated |
| Pilot duty | Yes |
| Voltage category | 120/240V AC 50/60 Hz |
| Operating voltage range ⁽¹⁾ | 74...265V AC 47...63 Hz |
| Output delay time Off to On | 9.3 ms @ 60 Hz 11 ms @ 50 Hz |
| On to Off | 9.3 ms @ 60 Hz 11 ms @ 50 Hz |
| Current draw @ 5.1V | 300 mA |
| Current draw @ 24V | 2.5 mA |
| Total backplane power | 1.59 W |
| Power dissipation, max | 5.5 W @ 60 °C (140 °F) |
| Thermal dissipation | 18.76 BTU/hr |
| Off-state leakage current, max | 3 mA per point |
| On-state voltage drop, max | 1.5V peak @ 2 A 6V peak @ load current < 50 mA |
| Current per point, max | 2 A @ 30 °C (86 °F) linear derating 1 A @ 60 °C (140 °F) linear derating |

Technical Specifications (Continued)

| Attribute | 1756-0A16I, 1756-0A16IK |
|----------------------------------|--|
| Current per module, max | 5 A @ 30 °C (86 °F) linear derating 4 A @ 60 °C (140 °F) linear derating |
| Surge current per point | 20 A for 43 ms per point, repeatable every 2 s @ 60 °C (140 °F) |
| Load current, min | 10 mA per point |
| Commutating voltage | 4V/μs for loads > 50 mA 0.2V/μs for loads < 50 mA ⁽²⁾ |
| Scheduled outputs | Synchronization within 16.7 s max, reference to the Coordinated System Time |
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| States in Program mode per point | Hold last state, On or Off (Off is default) |
| Isolation voltage | 250V (continuous), basic insulation type, outputs-to-backplane, and output-to-output |
| Inhibit voltage, max | Zero crossing 60V peak |
| Module keying | Electronic, software configurable |
| Fusing | Not protected. A fused IFM is recommended to help protect outputs |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽³⁾ |
| Enclosure type | None (open style) |
| North American temperature code | T4A |

(1) UL certification for 120/240V 50/60 Hz nominal. Rockwell Automation specified to 74...265V, 47...63 Hz.

(2) The commutating dv/dt of the output voltage (OUTPUT to L2) should not exceed 0.2V/μs for loads under 50 mA. The commutating dv/dt rating of the module for loads 50...500 mA (OUTPUT to L2) is 4V/μs maximum. If the commutating dv/dt rating of the TRIAC is exceeded, the TRIAC could latch on. If the commutating dv/dt rating is exceeded in the 10...50 mA range, a resistor can be added AC across the output and L2. The purpose of this resistor is to increase the total output current to 50 mA (I=V/R). At 50 mA and above, the module has a higher commutating dv/dt rating. When adding a resistor for the output to L2, be sure it is rated for the power that it dissipates (P=(V**2)/R). If the commutating dv/dt rating is exceeded in the 50...500 mA range, the L1 AC waveform could be at fault. Be sure that the waveform is a good sinusoid, void of any anomalies such as distorted, or flattened sections.

(3) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-0A16I, 1756-0A16IK |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |

Environmental Specifications (Continued)

| Attribute | 1756-0A16I, 1756-0A16IK |
|--|--|
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |
| Oscillatory surge withstand IEEE C37.90.1 | 3 kV |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-0A16I, 1756-0A16IK |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1 er muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-0N8

ControlLogix 24V AC output module

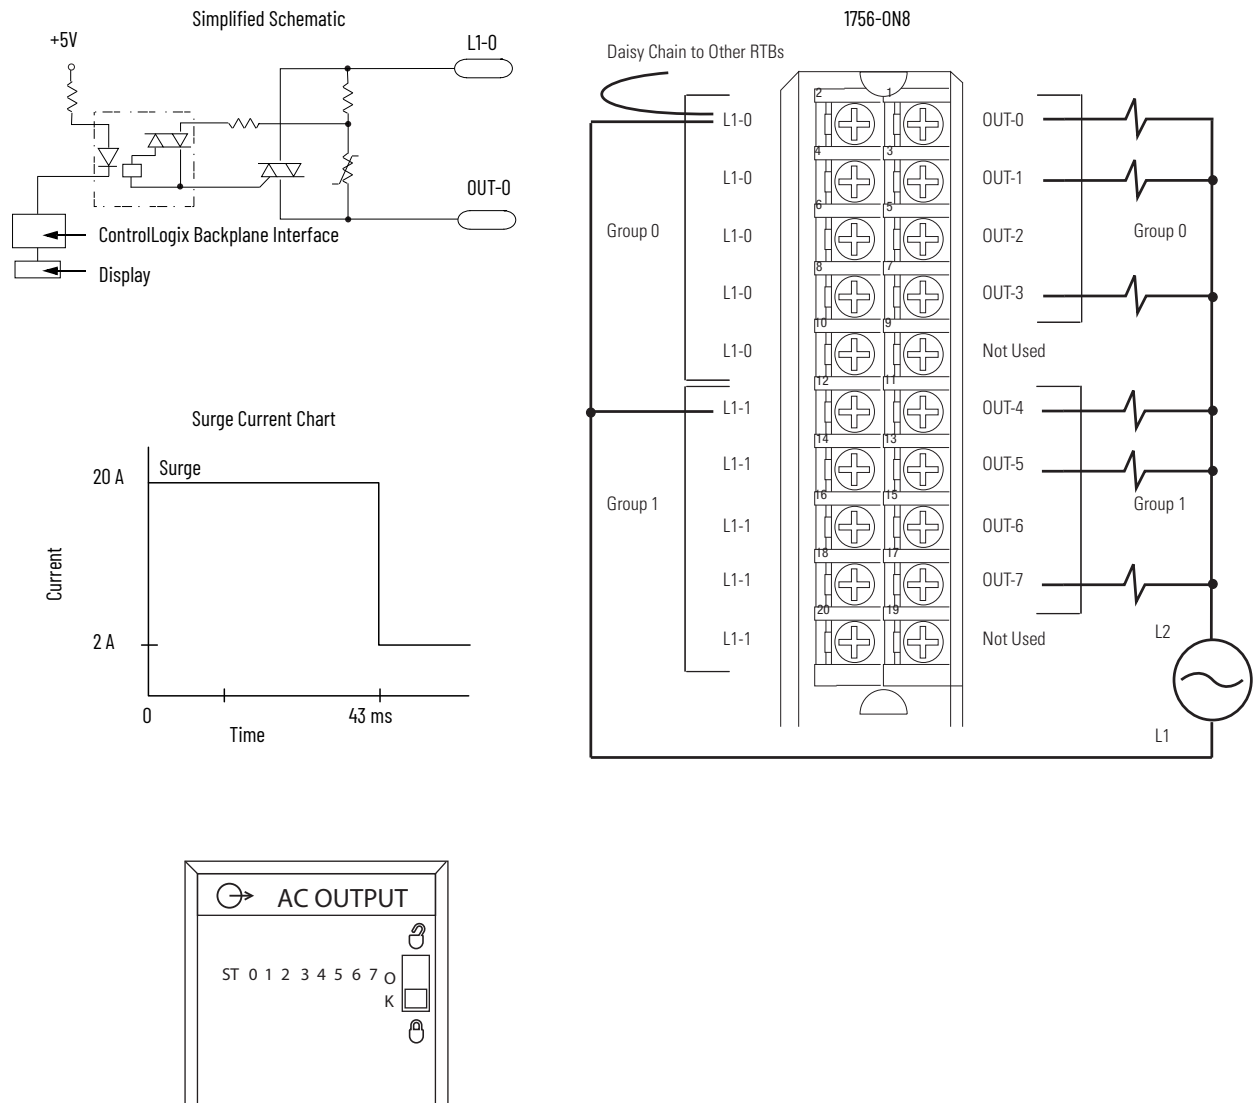

Technical Specifications

| Attribute | 1756-0N8 |
|--|--|
| Outputs | 8 (4 points/group) |
| Voltage category | 24V AC 50/60 Hz |
| Operating voltage range ⁽¹⁾ | 10...30V AC, current >50 mA, 47...63Hz 16...30V AC, current <50 mA, 47...63Hz |
| Output delay time Off to On | 9.3 ms @ 60 Hz 11 ms @ 50 Hz |
| On to Off | 9.3 ms @ 60 Hz 11 ms @ 50 Hz |
| Voltage and current ratings | Backplane: 5.1V DC, 200 mA 24V DC, 2 mA Output: 10...30V AC, 50/60Hz, 2 A Pilot Duty (DC-13/S0) MDL: 5A/4A 30°C/60°C |
| Current draw @ 5.1V | 200 mA |
| Current draw @ 24V | 2 mA |

Technical Specifications (Continued)

| Attribute | 1756-ON8 |
|----------------------------------|--|
| Total backplane power | 1.07 W |
| Power dissipation, max | 5.1 W @ 60 °C (140 °F) |
| Thermal dissipation | 17.39 BTU/hr |
| Off-state leakage current, max | 3 mA per point |
| On-state voltage drop, max | 1.5V peak @ 2 A 6V peak @ load current < 50 mA |
| Current per point, max | 2 A @ 60 °C (140 °F) |
| Current per module, max | 5 A @ 30 °C (86 °F) linear derating 4 A @ 60 °C (140 °F) linear derating |
| Surge current per point | 20 A for 43 ms per point, repeatable every 2 s @ 60 °C (140 °F) |
| Load current, min | 10 mA per point |
| Commutating voltage | 4V/μs for loads > 50 mA 0.2V/μs for loads < 50 mA ⁽²⁾ |
| Scheduled outputs | Synchronization within 16.7 s max, reference to the Coordinated System Time |
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| States in Program mode per point | Hold last state, On or Off (Off is default) |
| Isolation voltage | 250V (continuous), basic insulation type, outputs-to-backplane, and output group-to-group No isolation between individual group outputs |
| Module keying | Electronic, software configurable |
| Fusing | Not protected. A fused IFM is recommended to help protect outputs. |
| Removable terminal block | 1756-TBNH 1756-TBSH |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire size | 1756-TBNH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. 1756-TBSH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. |
| Terminal block torque specs | 1756-TBNH 1.36 N•m (12 lb-in) |
| Wire category ⁽³⁾ | 1 - on signal ports |
| Enclosure type | None (open style) |
| Temperature code | T4 |

(1) UL certification for 24V 50/60 Hz nominal. Rockwell Automation specified to 10...30V, 47...63 Hz.

(2) The commutating dv/dt of the output voltage (OUTPUT to L2) should not exceed 0.2V/μs for loads under 50 mA. The commutating dv/dt rating of the module for loads 50...500 mA (OUTPUT to L2) is 4V/μs maximum. If the commutating dv/dt rating of the TRIAC is exceeded, the TRIAC could latch on. If the commutating dv/dt rating is exceeded in the 10...50 mA range, a resistor can be added AC across the output and L2. The purpose of this resistor is to increase the total output current to 50 mA (I=V/R). At 50 mA and above, the module has a higher commutating dv/dt rating. When adding a resistor for the output to L2, be sure it is rated for the power that it dissipates ($P=(V^{**2})/R$). If the commutating dv/dt rating is exceeded in the 50...500 mA range, the L1 AC waveform could be at fault. Be sure that the waveform is a good sinusoid, void of any anomalies such as distorted, or flattened sections.

(3) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-0N8 |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0 °C < Ta < 60 °C (32 °F < Ta < 140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |



Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-0N8 |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> IEC 60079-0 Edition 7; General Requirements EN 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820 |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0 Edition 7; General Requirements IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0065 |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 2020122309111830, 2020122309111998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IB16, 1756-IB16K

ControlLogix® DC (10...31.2V) input module

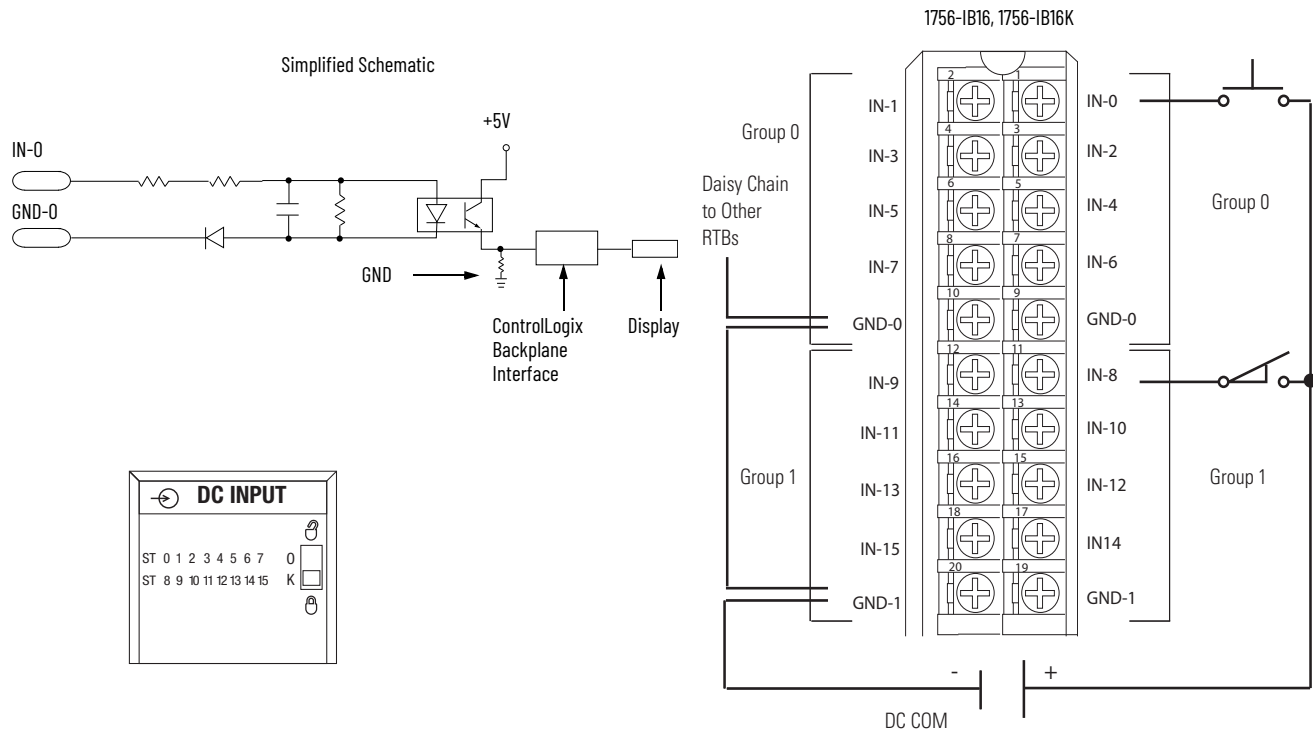

Technical Specifications

| Attribute | 1756-IB16, 1756-IB16K |
|--|---|
| Inputs | 16 (8 points/group) |
| Voltage category | 12/24V DC sink |
| Operating voltage range | 10...31.2V DC |
| Input voltage, nom | 24V DC |
| Input delay time (screw to backplane) Off to On | Hardware delay: 290 μ s nom/1 ms max + filter time User-selectable filter time: 0 ms, 1 ms, or 2 ms |
| On to Off | Hardware delay: 700 μ s nom/2 ms max + filter time User-selectable filter time: 0, 1, 2, 9, or 18 ms |
| Current draw @ 5.1V | 100 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 0.56 W |
| Power dissipation, max | 5.1 W @ 60 °C (140 °F) |
| Thermal dissipation | 17.39 BTU/hr |
| Off-state voltage, max | 5V |
| Off-state current, max | 1.5 mA |
| On-state current, min | 2 mA @ 10V DC |
| On-state current, max | 10 mA @ 31.2V DC |
| Inrush current, max | 250 mA peak (decaying to < 37% in 22 ms, without activation) |
| Input impedance, max | 3.12 k Ω @ 31.2V DC |
| Cyclic update time | 200 μ s...750 ms |
| Change of state | Software configurable |

Technical Specifications (Continued)

| Attribute | 1756-IB16, 1756-IB16K |
|----------------------------------|---|
| Time stamp of inputs | ±200 µs |
| Isolation voltage | 250V (continuous), basic insulation type, inputs-to-backplane, and input group-to-group No isolation between individual group inputs |
| Module keying | Electronic, software configurable |
| Removable terminal block housing | 1756-TBNH 1756-TBSH |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽¹⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T3 |
| Reverse polarity protection | Yes |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IB16, 1756-IB16K |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |
| Oscillatory surge withstand IEEE C37.90.1 | 3 kV |



Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IB16, 1756-IB16K |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T3 Gc UL22ATEX2820X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T3 Gc IECEX UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IB16D, 1756-IB16DK

ControlLogix DC (10...30V) diagnostic input module

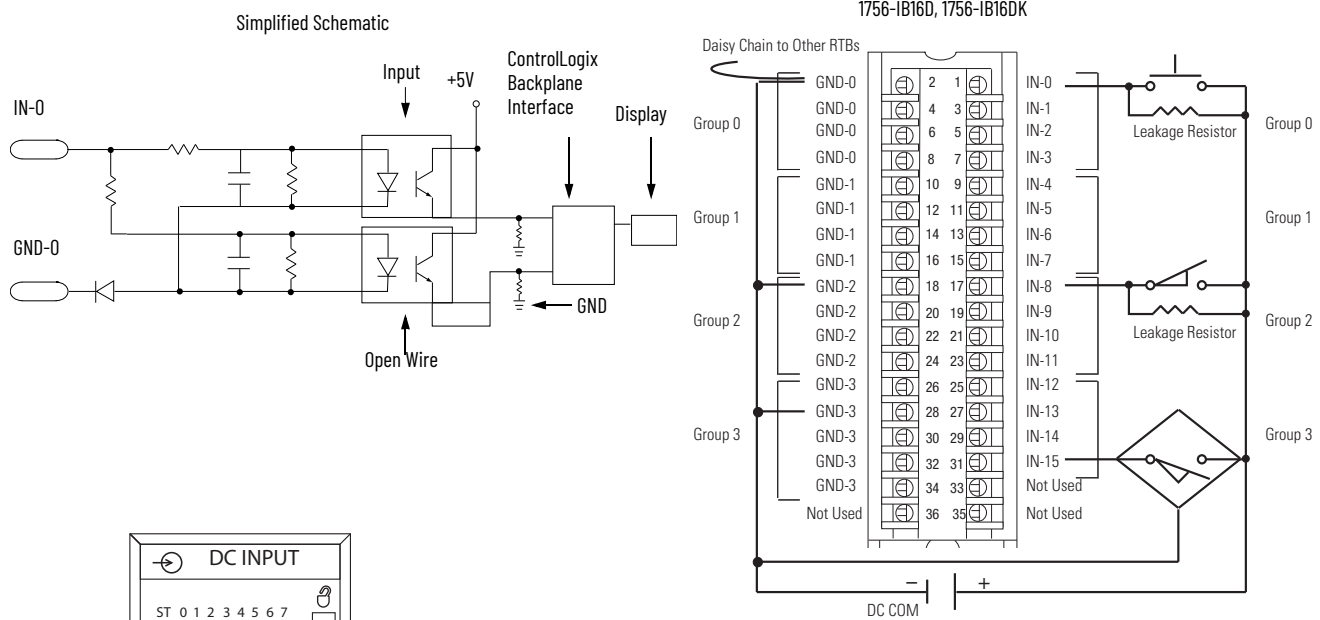

| Recommended Leakage Resistor Size 1/4 W, 5% | Supply Voltage |
|---|----------------|
| 3.9K | 10V DC |
| 5.6K | 12V DC |
| 15K | 24V DC |
| 20K | 30V DC |

Diagnostic Specifications

| Attribute | 1756-IB16D, 1756-IB16DK |
|---------------------------|--------------------------------------|
| Open wire | Off-state leakage current 1.2 mA min |
| Time stamp of diagnostics | ±1 ms |

Technical Specifications

| Attribute | 1756-IB16D, 1756-IB16DK |
|--|--|
| Inputs | 16 diagnostic (4 points/group) |
| Voltage category | 12/24V DC sink |
| Operating voltage range | 10...30V DC |
| Input voltage, nom | 24V DC |
| Input delay time (screw to backplane) Off to On | Hardware delay: 340 µs nom/1 ms max + filter time User-selectable filter time: 0 ms, 1 ms, or 2 ms |
| On to Off | Hardware delay: 740 µs nom/4 ms max + filter time User-selectable filter time: 0 ms, 1 ms, 9 ms, or 18 ms |
| Current draw @ 5.1V | 150 mA |
| Current draw @ 24V | 3 mA |
| Total backplane power | 0.84 W |
| Power dissipation, max | 5.8 W @ 60 °C (140 °F) |
| Thermal dissipation | 19.78 BTU/hr |
| Off-state voltage, max | 5V |
| Off-state current, max | 1.5 mA |

Technical Specifications (Continued)

| Attribute | 1756-IB16D, 1756-IB16DK |
|----------------------------------|---|
| On-state current, min | 2 mA @ 10V DC |
| On-state current, max | 13 mA @ 30V DC |
| Inrush current, max | 250 mA |
| Input impedance, max | 2.31 kΩ @ 30V DC |
| Cyclic update time | 200 μs...750 ms |
| Change of state | Software configurable |
| Time stamp of inputs | ±200 μs |
| Isolation voltage | 250V (continuous), basic insulation type, inputs-to-backplane, and input group-to-group No isolation between individual group inputs |
| Module keying | Electronic, software configurable |
| Removable terminal block housing | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽¹⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T3 |
| Reverse polarity protection | Yes |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IB16D, 1756-IB16DK |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IB16D, 1756-IB16DK |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T3 Gc UL22ATEX2820X |
| IECEx | IECEx System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T3 Gc IECEx UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IB16I, 1756-IB16IK

ControlLogix DC (10...30V) isolated input module

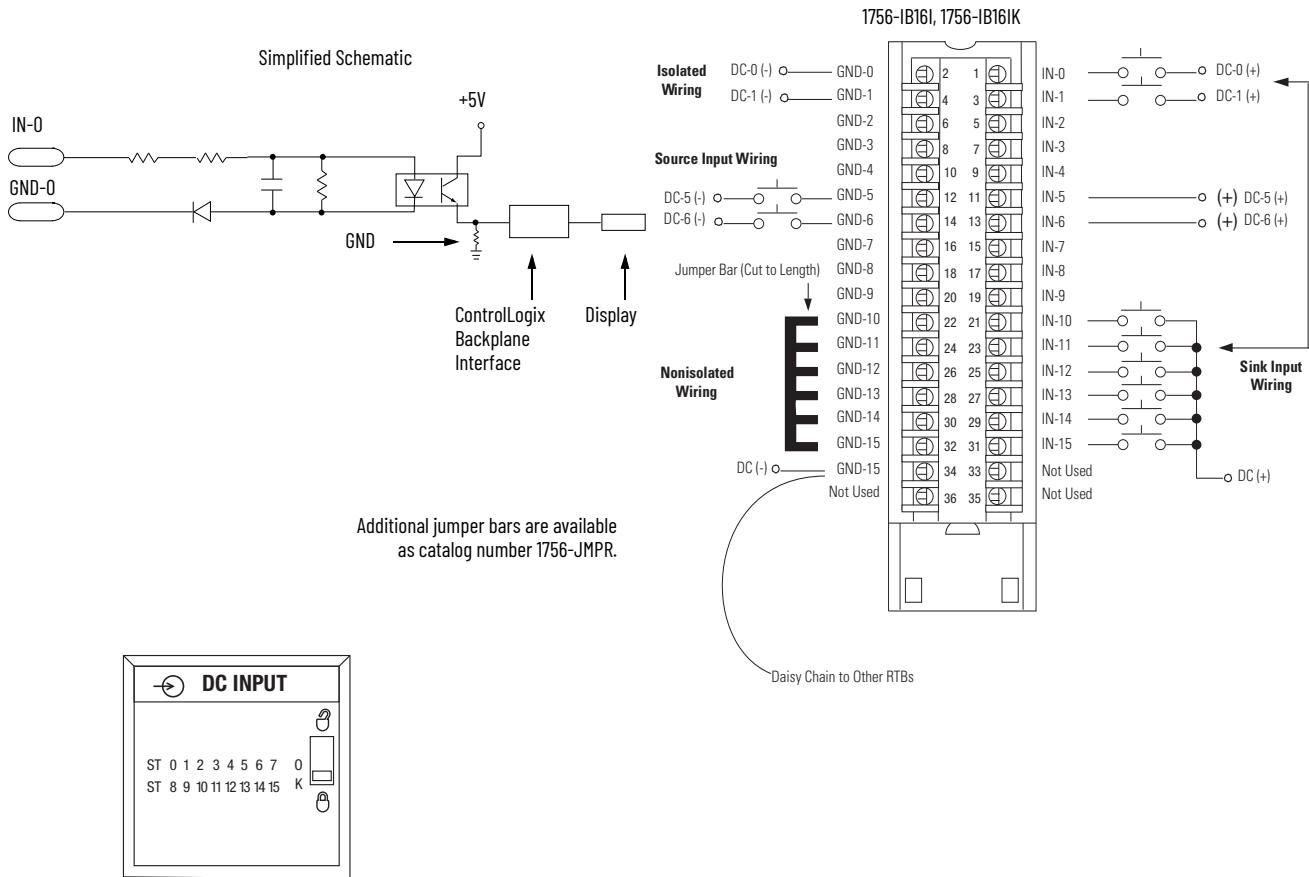

Technical Specifications

| Attribute | 1756-IB16I, 1756-IB16IK |
|---------------------------------------|---|
| Inputs | 16 individually isolated |
| Voltage category | 12/24V DC sink/source |
| Operating voltage range | 10...30V DC |
| Input voltage, nom | 24V DC |
| Input delay time (screw to backplane) | Hardware delay: 1 ms max + filter time User-selectable filter time: 0 ms, 1 ms, or 2 ms Hardware delay: 4 ms max + filter time User-selectable filter time: 0 ms, 1 ms, 2 ms, 9 ms, or 18 ms |
| Off to On | |
| On to Off | |
| Current draw @ 5.1V | 100 mA |
| Current draw @ 24V | 3 mA |
| Total backplane power | 0.58 W |
| Power dissipation, max | 5 W @ 60 °C (140 °F) |
| Thermal dissipation | 17.05 BTU/hr |
| Off-state voltage, max | 5V |
| Off-state current, max | 1.5 mA |
| On-state current, min | 2 mA @ 10V DC |
| On-state current, max | 10 mA @ 30V DC |
| Inrush current, max | 250 mA peak (decaying to < 37% in 22 ms, without activation) |
| Input impedance, max | 3 kΩ @ 30V DC |
| Cyclic update time | 200 μs...750 ms |
| Change of stat | Software configurable |

Technical Specifications (Continued)

| Attribute | 1756-IB16I, 1756-IB16IK |
|----------------------------------|---|
| Time stamp of inputs | ±200 µs |
| Isolation voltage | 250V (continuous), basic insulation type, inputs-to-backplane, and input-to-input |
| Module keying | Electronic, software configurable |
| Removable terminal block housing | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | † ⁽¹⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |
| Reverse polarity protection | Yes |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IB16I, 1756-IB16IK |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |
| Oscillatory surge withstand IEEE C37.90.1 | 3 kV |

Certifications



| Certification (when product is marked) ⁽¹⁾ | 1756-IB16I, 1756-IB16IK |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.


1756-IB16IF, 1756-IB16IFK

ControlLogix DC (10...30V) sinking or sourcing, isolated, fast input module

Simplified Schematic

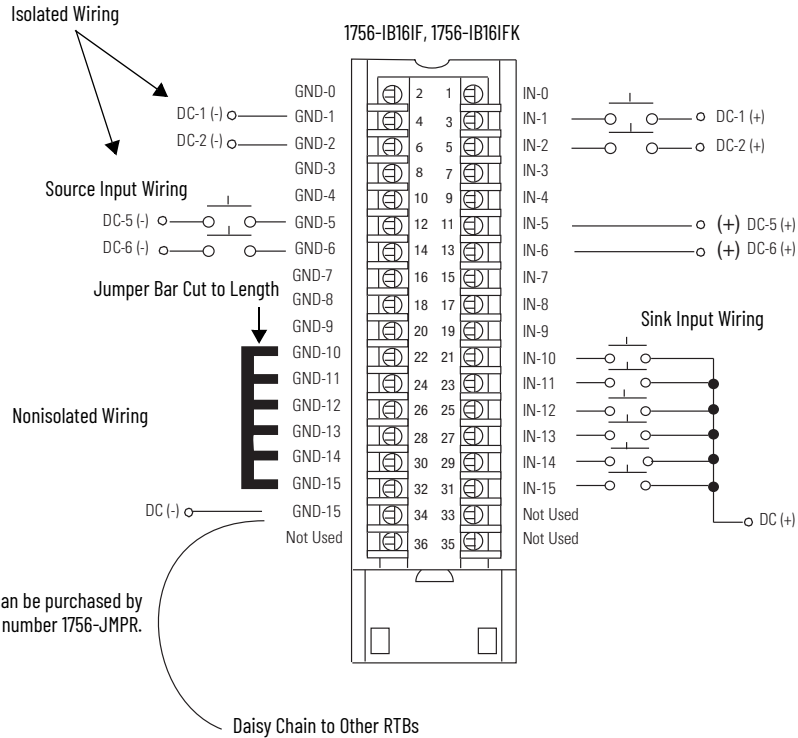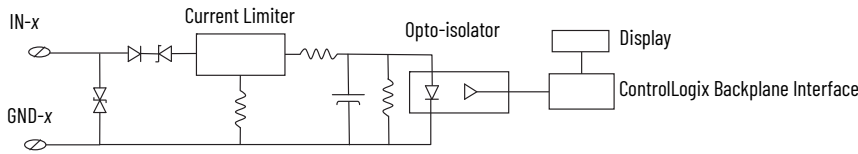

Additional jumper bars can be purchased by using catalog number 1756-JMPR.



Technical Specifications

| Attribute | 1756-IB16IF, 1756-IB16IFK |
|---------------------------------------|---|
| Inputs | 16 individually isolated |
| Voltage category | 12/24V DC sink/source |
| Operating voltage range | 10...30V DC |
| Input voltage, nom | 24V DC |
| Input delay time (screw to backplane) | |
| Off to On | 14 μ s nom/23 μ s max + user-configurable filter time of 0...30,000 μ s |
| On to Off | 14 μ s nom/23 μ s max + user-configurable filter time of 0...30,000 μ s |
| Current draw @ 5.1V | 275 mA |

Technical Specifications (Continued)

| Attribute | 1756-IB16IF, 1756-IB16IFK |
|----------------------------------|--|
| Current draw @ 24V | 3 mA |
| Total backplane power | 1.47 W |
| Power dissipation | 3.8 W @ 60 °C (140 °F) |
| Thermal dissipation | 12.97 BTU/hr |
| Off-state voltage, max | 5V |
| Off-state current, max | 1.5 mA |
| On-state current, min | 2 mA @ 10V DC |
| On-state current, max | 5 mA @ 30V DC |
| Input impedance, max | 6 kΩ @ 30V DC |
| Cyclic update time | 200 μs...750 ms |
| Change of state | Software configurable |
| Time stamp of inputs | ± 4 μs for inputs < 4 kHz ± 13 μs for inputs > 4 kHz |
| Isolation voltage | 250V (continuous), reinforced insulation type, inputs-to-backplane 250V (continuous), basic insulation type, input-to-input |
| Module keying | Electronic, software configurable |
| Removable terminal block housing | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 on signal ports ⁽¹⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |
| Reverse polarity protection | Yes |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IB16IF, 1756-IB16IFK |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |

Environmental Specifications (Continued)

| Attribute | 1756-IB16IF, 1756-IB16IFK |
|---|--|
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |



Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IB16IF, 1756-IB16IFK |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820X |
| IECEx | IECEx System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEx UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1 er muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 2020122309111830, 2020122309111998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IB16ISOE, 1756-IB16ISOEK

ControlLogix DC (10...55V) sequence of events input module

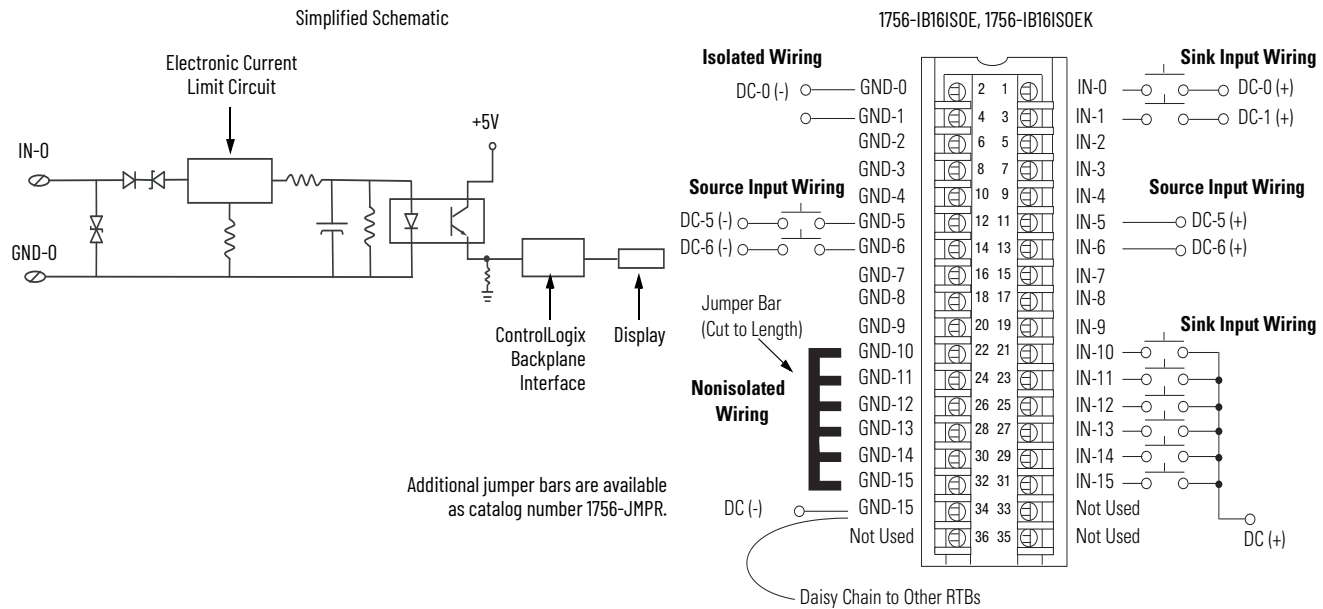

Technical Specifications

| Attribute | 1756-IB16ISOE, 1756-IB16ISOEK |
|--|---|
| Inputs | 16 individually isolated, sequence of events |
| Voltage category | 24/48V DC sink/source |
| Operating voltage range | 10...55V DC |
| Input voltage, nom | 24V DC |
| Input delay time (screw to backplane) Off to On | Hardware delay: 10 μ s nom/20 μ s max + firmware scan: up to 25 μ s + filter time: 0...50 ms + ASIC delay: 175 μ s (FIFO) or 625 μ s (Coordinated System Time per point) |
| On to Off | Hardware delay: 25 μ s nom/50 μ s max + firmware scan: up to 25 μ s + filter time: 0...50 ms + ASIC delay: 175 μ s (FIFO) or 625 μ s (Coordinated System Time per point) |
| Current draw @ 5.1V | 320 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 1.7 W |
| Power dissipation, max | 5.5 W @ 60 °C (140 °F) |
| Thermal dissipation | 17.22 BTU/hr |
| Off-state voltage, max | 5V |
| Off-state current, max | 1.5 mA |
| On-state current, min | 2.0 mA @ 9V DC |
| On-state current, nom | 4.5 mA @ 24...31V DC |
| On-state current, max | 5.1 mA @ 48...55V DC |
| Input impedance, max | 10.8 k Ω @ 55V DC |

Technical Specifications (Continued)

| Attribute | 1756-IB16ISOE, 1756-IB16ISOEK |
|-----------------------------|---|
| Cyclic update time | 200 μ s...750 ms |
| Change of state | Software configurable |
| Time stamp of inputs | \pm 100 μ s |
| Isolation voltage | 250V (continuous), basic ⁽¹⁾ insulation type, outputs to backplane. 125V (continuous), basic insulation type, outputs group to group. No isolation between individual outputs. |
| Module keying | Electronic, software configurable |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽²⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |
| Reverse polarity protection | Yes |

(1) Per IEC 61010-1 terminology, the insulation type is basic. Per older UL508 terminology, the insulation type is reinforced.

(2) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IB16ISOE, 1756-IB16ISOEK |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | \pm 4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | \pm 1 kV line-line (DM) and \pm 2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |
| Oscillatory surge withstand IEEE C37.90.1 | 2.5 kV |



Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IB16ISOE, 1756-IB16ISOEK |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820X |
| IECEx | IECEx System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEx UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 2020122309111830, 2020122309111998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IB32, 1756-IB32K

ControlLogix DC (10...31.2V) input module

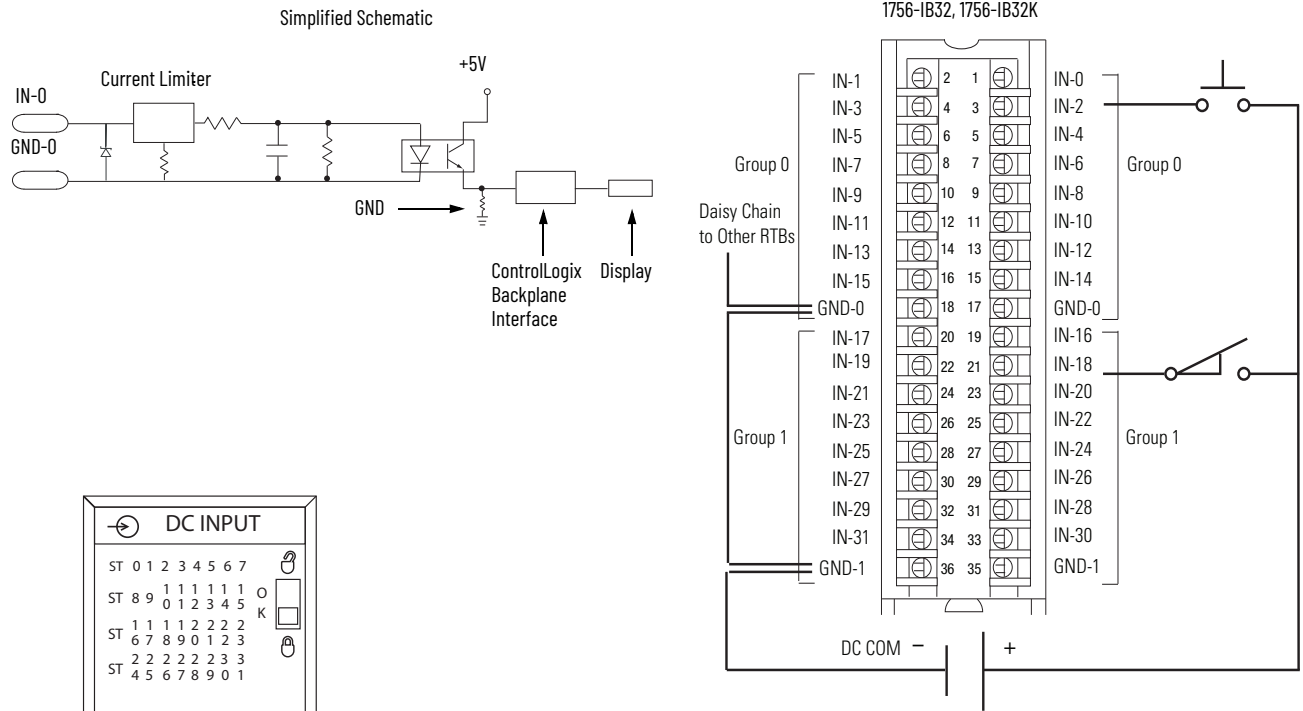

Technical Specifications

| Attribute | 1756-IB32, 1756-IB32K |
|---------------------------------------|---|
| Inputs | 32 (16 points/group) |
| Voltage category | 12/24V DC sink |
| Operating voltage range | 10...31.2V DC |
| Input voltage, nom | 24V DC |
| Input delay time (screw to backplane) | Hardware delay: 380 μ s max + filter time User-selectable filter time: 0 ms, 1 ms, or 2 ms Hardware delay: 420 μ s max + filter time User-selectable filter time: 0 ms, 1 ms, 2 ms, 9 ms, or 18 ms |
| Off to On | |
| On to Off | |
| Current draw @ 5.1V | 120 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 0.66 W |
| Power dissipation, max | 6.2 W @ 60 °C (140 °F) |
| Thermal dissipation | 21.1 BTU/hr @ 60 °C (140 °F) |
| Off-state voltage, max | 5V |
| Off-state current, max | 2.27 mA |
| On-state current, min | 4.8 mA @ 10V DC |
| On-state current, max | 5.5 mA @ 31.2V DC |
| Inrush current, max | 250 mA (decaying to < 37% in 22 ms, without activation) |
| Input impedance, max | 5.67 k Ω @ 31.2V DC |
| Cyclic update time | 200 μ s...750 ms |
| Change of state | Software configurable |
| Time stamp of inputs | \pm 200 μ s |
| Isolation voltage | 250V (continuous), reinforced insulation type, inputs-to-backplane 250V (continuous), basic insulation type, input group-to-group No isolation between individual group inputs |

Technical Specifications (Continued)

| Attribute | 1756-IB32, 1756-IB32K |
|-----------------------------|------------------------------------|
| Module keying | Electronic, software configurable |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 - on signal ports ⁽¹⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |
| Reverse polarity protection | Yes |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IB32, 1756-IB32K |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |
| Oscillatory surge withstand IEEE C37.90.1 | 3 kV |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IB32, 1756-IB32K |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> • EN 61326-1; Meas./Control/Lab., Industrial Requirements • EN 61000-6-2; Industrial Immunity • EN 61000-6-4; Industrial Emissions • EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> • EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements • EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" • II 3 G Ex ec IIC T4 Gc • UL22ATEX2820X |
| IECEx | IECEx System, compliant with: <ul style="list-style-type: none"> • IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements • IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" • II 3 G Ex ec IIC T4 Gc • IECEx UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> • Schedule 1 of the UKEX Regulation 2016 No. 1107 • Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> • 2016 No. 1091, Electromagnetic Compatibility Regulations • 2016 No. 1101, Electrical Equipment (Safety) Regulations • 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations • 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> • Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension • Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IC16

ControlLogix DC (30...60V) input module

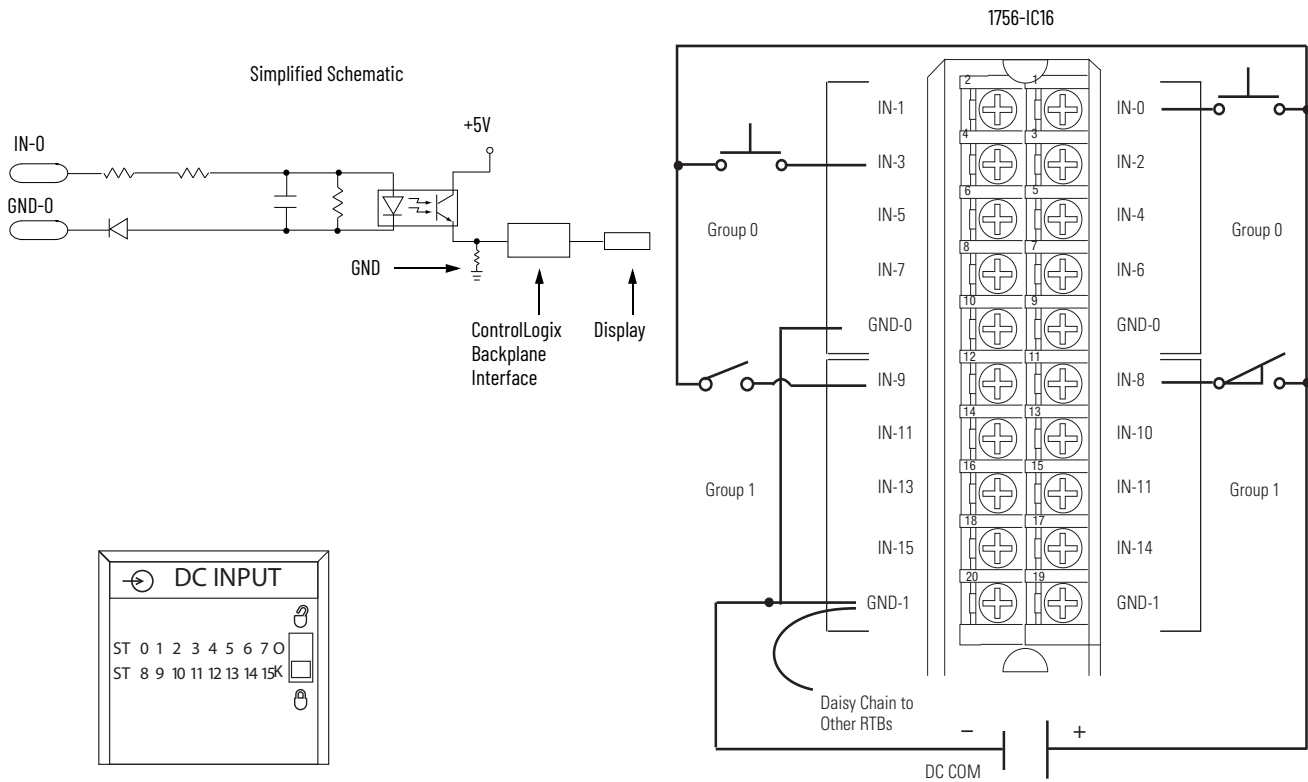

Technical Specifications

| Attribute | 1756-IC16 |
|---------------------------------------|---|
| Inputs | 16 (8 points/group) |
| Voltage category | 48V DC sink |
| Operating voltage range | 30...55V DC @ 60 °C (140 °F) 30...60V DC @ 55 °C (131 °F) |
| Input voltage, nom | 48V DC |
| Input delay time (screw to backplane) | Hardware delay: 1 ms max + filter time User-selectable filter time: 0 ms, 1 ms, or 2 ms |
| Off to On | |
| On to Off | Hardware delay: 4 ms max + filter time User-selectable filter time: 0 ms, 1 ms, 2 ms, 9 ms, or 18 ms |
| Current draw @ 5.1V | 100 mA |
| Current draw @ 24V | 3 mA |
| Total backplane power | 0.58 W |
| Power dissipation, max | 5.2 W @ 60 °C (140 °F) |
| Thermal dissipation | 17.73 BTU/hr |
| Off-state voltage, max | 10V |
| Off-state current, max | 1.5 mA |
| On-state current, min | 2 mA @ 30V DC |
| On-state current, max | 7 mA @ 60V DC |
| Inrush current, max | 250 mA |
| Input impedance, max | 8.57 kΩ @ 60V DC |
| Cyclic update time | 200 μs...750 ms |
| Change of state | Software configurable |
| Time stamp of inputs | ±200 μs |

Technical Specifications (Continued)

| Attribute | 1756-IC16 |
|----------------------------------|---|
| Isolation voltage | 250V (continuous), basic insulation type, inputs-to-backplane 125V (continuous), basic insulation type, input group-to-group No isolation between individual group inputs |
| Module keying | Electronic, software configurable |
| Removable terminal block housing | 1756-TBNH 1756-TBSH |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽¹⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |
| Reverse polarity protection | Yes |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IC16 |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |
| Oscillatory surge withstand IEEE C37.90.1 | 3 kV |

Certifications


| Certification (when product is marked) ⁽¹⁾ | 1756-IC16 |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.


1756-IG16

ControlLogix TTL input module

Standard Wiring


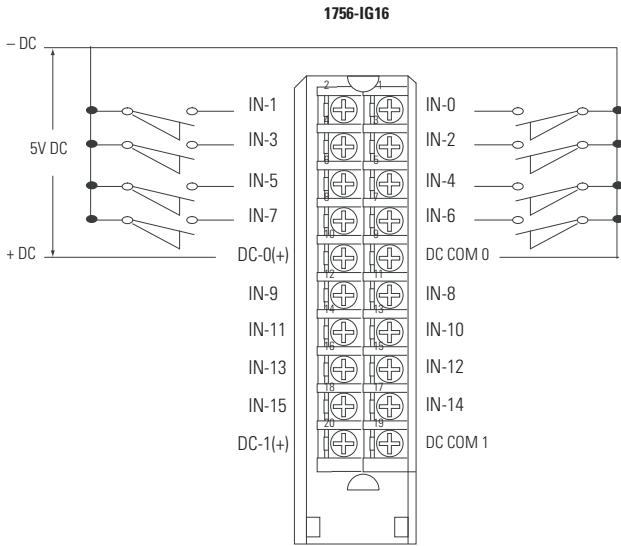


CE Compliant Wiring

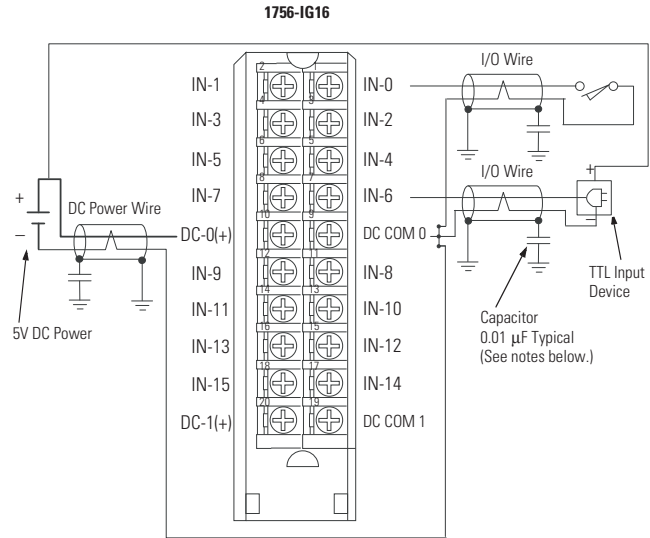

IMPORTANT: I/O cables must be shielded type and cable length must be <10 m (32.8 ft) for maximum EMI noise immunity.

Simplified Schematic

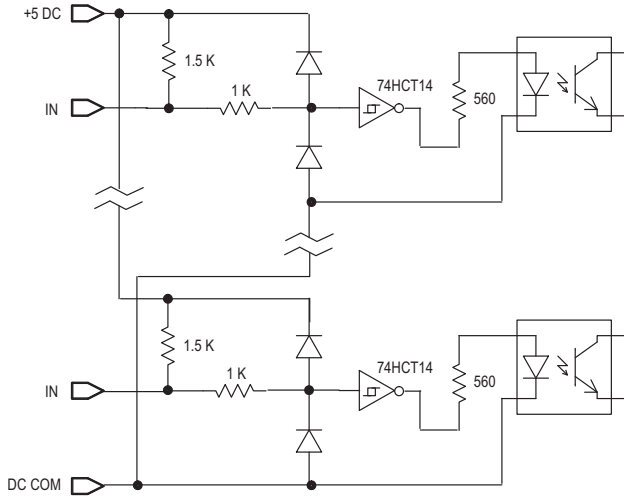

Low to True Format - 1756-IG16

- -0.2...+0.8V = Input guaranteed to be in on-state
- 0.8...2.0V = Input state not guaranteed
- 2.0...5.5V = Input guaranteed to be in off-state

Technical Specifications

| Attribute | 1756-IG16 |
|---------------------------------------|---|
| Inputs | 16 (8 points/group) |
| Voltage category | 5V DC TTL source (Low=True) ⁽¹⁾ |
| Operating voltage range | 4.5...5.5V DC 50 mV P-P ripple max |
| Input delay time (screw to backplane) | |
| Off to On (5-to-0V DC transition) | Hardware delay: 270 µs nom/450 µs max + filter time User-selectable filter time: 0 ms, 1 ms, or 2 ms |
| On to Off (0-to-5V DC transition) | Hardware delay: 390 µs nom/ 700 µs max + filter time User-selectable filter time: 0 ms, 1 ms, 2 ms, 9 ms, or 18 ms |

Technical Specifications (Continued)

| Attribute | 1756-IG16 |
|----------------------------------|---|
| Current draw @ 5.1V | 110 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 0.61 W |
| Power dissipation, max | 1.4 W @ 60 °C (140 °F) |
| Thermal dissipation | 4.8 BTU/hr @ 60 °C (140 °F) |
| Off-state voltage, max | 2V |
| Off-state current, max | 4.1 mA |
| Input impedance, max | 1.4 kΩ min 1.5 kΩ typical |
| Input current, nom | 3.7 mA @ 5V DC |
| Input current, max | 4.1 mA @ 5V DC |
| Cyclic update time | 200 μs...750 ms |
| Change of state | Software configurable |
| Time stamp of inputs | ±200 μs |
| Isolation voltage | 250V (continuous), basic insulation type, inputs-to-backplane, and input group-to-group No isolation between individual group inputs |
| Module keying | Electronic, software configurable |
| Removable terminal block housing | 1756-TBNH 1756-TBSH |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 2 ⁽²⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |
| Reverse polarity protection | No |

(1) TTL inputs are inverted (-0.2 to +0.8 = low voltage = True = 0n.) Use a NOT instruction in your program to convert to traditional True - High logic.

(2) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IG16 |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |

Environmental Specifications (Continued)

| Attribute | 1756-IG16 |
|--|--|
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±1 kV at 5 kHz on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |



Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IG16 |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1 er muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IH16I

ControlLogix 125V DC isolated input module

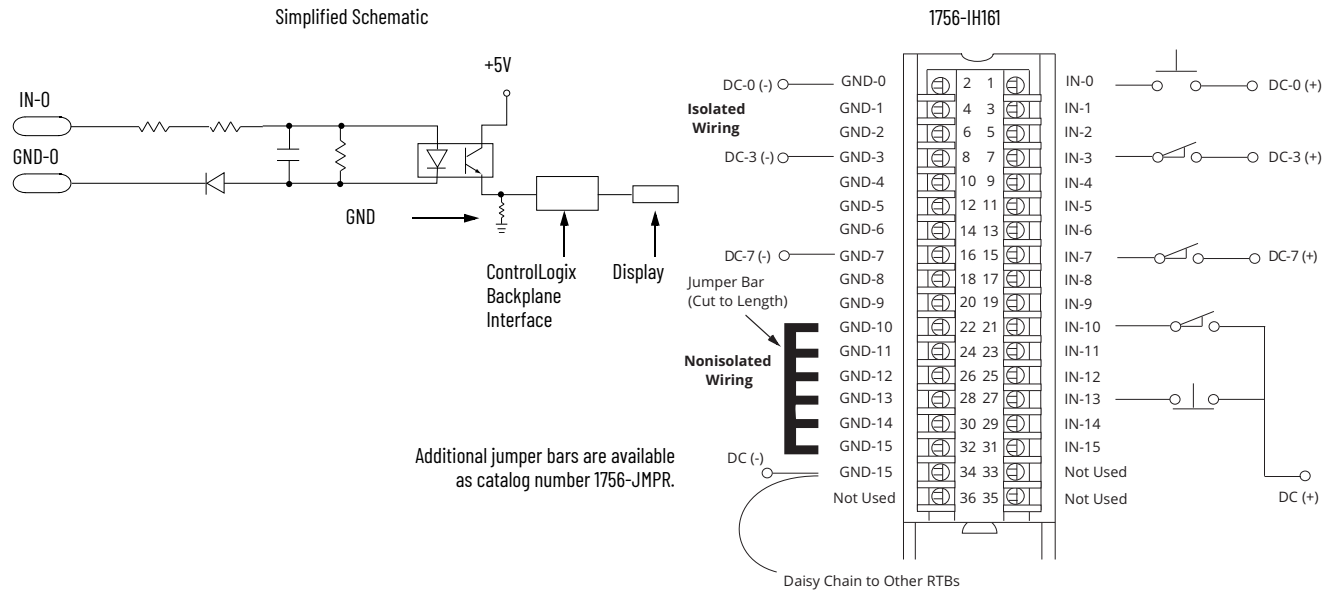

Technical Specifications

| Attribute | 1756-IH16I |
|--|---|
| Inputs | 16 individually isolated |
| Voltage category | 125V DC sink/source |
| Operating voltage range | 90...146V DC ⁽¹⁾ |
| Input voltage, nom | 125V DC |
| Input delay time (screw to backplane) Off to On | Hardware delay: 2 ms max + filter time User-selectable filter time: 0 ms, 1 ms, or 2 ms |
| On to Off | Hardware delay: 6 ms max + filter time User-selectable filter time: 0 ms, 1 ms, 2 ms, 9 ms, or 18 ms |
| Current draw @ 5.1V | 125 mA |
| Current draw @ 24V | 3 mA |
| Total backplane power | 0.71 W |
| Power dissipation, max | 5 W @ 60 °C (140 °F) |
| Thermal dissipation | 17.05 BTU/hr |
| Off-state voltage, max | 20V DC |
| Off-state current, max | 0.8 mA |
| On-state current, min | 1 mA @ 90V DC |
| On-state current, max | 3 mA @ 146V DC |
| On-state voltage Derated as follows | 90...146V DC 90...146V DC @ 50 °C (122 °F), 12 Channels ON 90...132V DC @ 55 °C (131 °F), 14 Channels ON 90...125V DC @ 60 °C (140 °F), 16 Channels ON 90...146V DC @ 30 °C (86 °F), 16 Channels ON |

Technical Specifications (Continued)

| Attribute | 1756-IH16I |
|----------------------------------|---|
| Inrush current, max | 250 mA |
| Input impedance, max | 48.67 k Ω @ 146V DC |
| Cyclic update time | 200 μ s...750 ms |
| Change of state | Software configurable |
| Time stamp of inputs | \pm 200 μ s |
| Isolation voltage | 250V (continuous), basic insulation type, inputs-to-backplane, and input-to-input |
| Module keying | Electronic, software configurable |
| Removable terminal block housing | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽²⁾ |
| Enclosure type | None (open-style) |
| North American temperature code | T4 |
| Reverse polarity protection | Yes |

(1) UL certification for 125V nominal. Rockwell Automation specified to the following:

- 90...146V DC @ 50 °C (122 °F), 12 channels on
- 90...132V DC @ 55 °C (131 °F), 14 channels on
- 90...125V DC @ 60 °C (140 °F), 16 channels on
- 90...146V DC @ 30 °C (86 °F), 16 channels on.

(2) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IH16I |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | \pm 4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | \pm 1 kV line-line (DM) and \pm 2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |
| Oscillatory surge withstand IEEE C37.90.1 | 3 kV |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IH16I |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> • EN 61326-1; Meas./Control/Lab., Industrial Requirements • EN 61000-6-2; Industrial Immunity • EN 61000-6-4; Industrial Emissions • EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> • 2016 No. 1091, Electromagnetic Compatibility Regulations • 2016 No. 1101, Electrical Equipment (Safety) Regulations • 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations • 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> • Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension • Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IH16ISOE

ControlLogix DC (90...140V) sequence of events input module

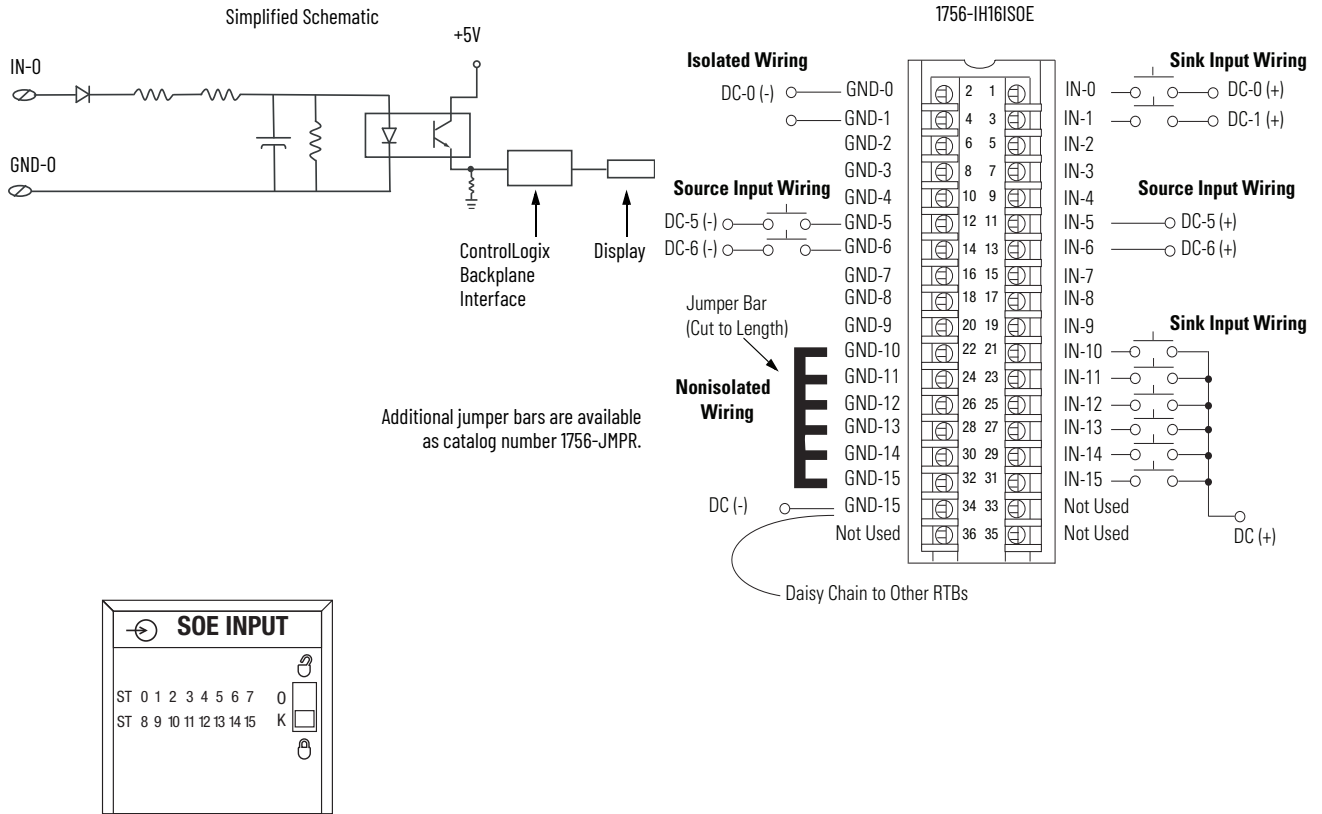

Technical Specifications

| Attribute | 1756-IH16ISOE |
|--|--|
| Inputs | 16 individually isolated, sequence of events |
| Voltage category | 125V DC sink/source |
| Operating voltage range | 90...140V DC |
| Input voltage, nom | 125V DC |
| Input delay time (screw to backplane) Off to On | Hardware delay: 10 µs nom/20 µs max + firmware scan: up to 25 µs + filter time: 0...50 ms + ASIC delay: 175 µs (FIFO) or 625 µs (Coordinated System Time per point) |
| On to Off | Hardware delay: 50 µs nom/75 µs max + firmware scan: up to 25 µs + filter time: 0...50 ms + ASIC delay: 175 µs (FIFO) or 625 µs (Coordinated System Time per point) |
| Current draw @ 5.1V | 275 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 1.5 W |
| Power dissipation, max | 5.5 W @ 60 °C (140 °F) |
| Thermal dissipation | 17.22 BTU/hr |
| Off-state voltage, max | 20V |
| Off-state current, max | 0.3 mA |
| On-state current, min | 1.15 mA @ 90V DC |
| On-state current, max | 1.85 mA @ 140V DC |
| Input impedance, max | 74.8 kΩ |
| Cyclic update time | 200 µs...750 ms |

Technical Specifications (Continued)

| Attribute | 1756-IH16ISOE |
|---------------------------------|---|
| Change of state | Software configurable |
| Time stamp of inputs | ±100 µs |
| Isolation voltage | 250V (continuous), basic insulation type, inputs-to-backplane, and input-to-input |
| Module keying | Electronic, software configurable |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽¹⁾ |
| Enclosure type | None (open-style) |
| North American temperature code | T3C |
| Reverse polarity protection | Yes |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IH16ISOE |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |
| Oscillatory surge withstand IEEE C37.90.1 | 3 kV |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IH16ISOE |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> • EN 61326-1; Meas./Control/Lab., Industrial Requirements • EN 61000-6-2; Industrial Immunity • EN 61000-6-4; Industrial Emissions • EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> • 2016 No. 1091, Electromagnetic Compatibility Regulations • 2016 No. 1101, Electrical Equipment (Safety) Regulations • 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations • 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> • Arrêté ministériel n° 6404-15 du 1 er muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension • Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IV16, 1756-IV16K

ControlLogix DC (10...30V) sourcing input module

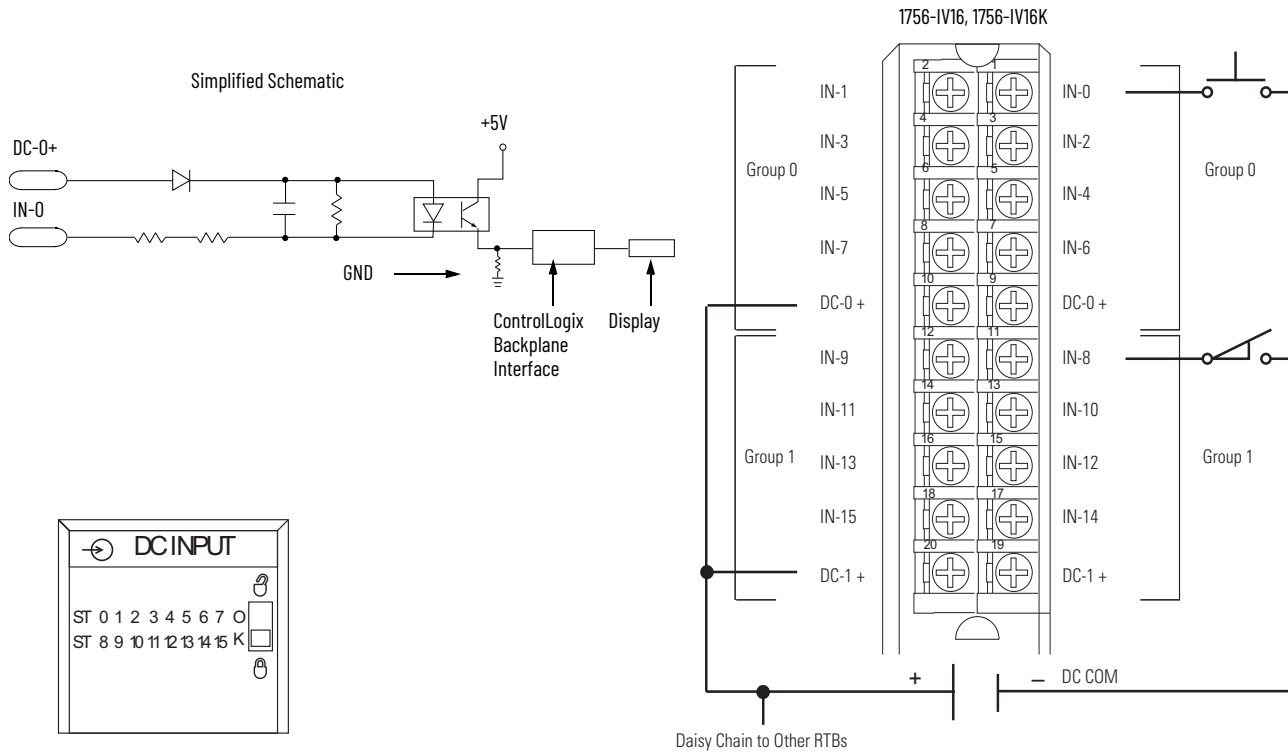

Technical Specifications

| Attribute | 1756-IV16, 1756-IV16K |
|--|---|
| Inputs | 16 (8 points/group) |
| Voltage category | 12/24V DC source |
| Operating voltage range | 10...30V DC |
| Input voltage, nom | 24V DC |
| Input delay time (screw to backplane) Off to On | Hardware delay: 280 μ s nom/1 ms max + filter time User-selectable filter time: 0 ms, 1 ms, or 2 ms |
| On to Off | Hardware delay: 540 μ s nom/2 ms max + filter time User-selectable filter time: 0 ms, 1 ms, 2 ms, 9 ms, or 18 ms |
| Current draw @ 5.1V | 110 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 0.61 W |
| Power dissipation, max | 5.41 W @ 60 °C (140 °F) |
| Thermal dissipation | 18.47 BTU/hr |
| Off-state voltage, max | 5V DC |
| Off-state current, max | 1.5 mA |
| On-state current, min | 2 mA @ 10V DC |
| On-state current, max | 10 mA @ 30V DC |
| Inrush current, max | 250 mA |
| Input impedance, max | 3.2 k Ω @ 30V DC |
| Cyclic update time | 200 μ s...750 ms |
| Change of state | Software configurable |
| Time stamp of inputs | \pm 200 μ s |
| Isolation voltage | 250V (continuous), basic insulation type, inputs-to-backplane, and input group-to-group No isolation between individual group inputs |
| Module keying | Electronic, software configurable |

Technical Specifications (Continued)

| Attribute | 1756-IV16, 1756-IV16K |
|----------------------------------|-------------------------|
| Removable terminal block housing | 1756-TBNH 1756-TBSH |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1(1) |
| Enclosure type | None (open-style) |
| Temperature code | T4 |
| Reverse polarity protection | Yes |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IV16, 1756-IV16K |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |



Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IV16, 1756-IV16K |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IV32, 1756-IV32K

ControlLogix DC (10...30V) sourcing input module

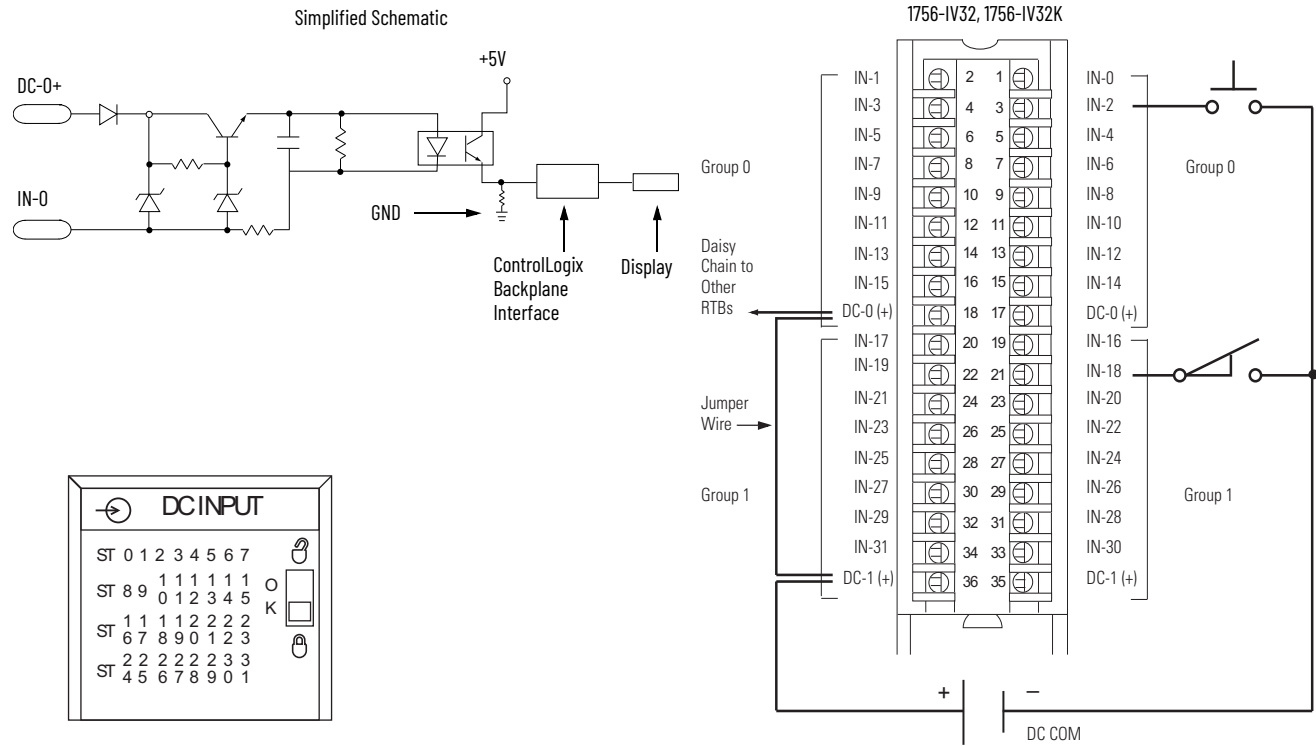

Technical Specifications

| Attribute | 1756-IV32, 1756-IV32K |
|--|---|
| Inputs | 32 (16 points/group) |
| Voltage category | 12/24V DC source |
| Operating voltage range | 10...30V DC |
| Input voltage, nom | 24V DC |
| Input delay time (screw to backplane) Off to On | Hardware delay: 350 μ s nom/1 ms max + filter time User-selectable filter time: 0 ms, 1 ms, or 2 ms |
| On to Off | Hardware delay: 540 μ s nom/2 ms max + filter time User-selectable filter time: 0 ms, 1 ms, 2 ms, 9 ms, or 18 ms |
| Current draw @ 5.1V | 120 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 0.66 W |
| Power dissipation, max | 4.1 W @ 60 °C (140 °F) |
| Thermal dissipation | 14 BTU/hr @ 60 °C (140 °F) |
| Off-state voltage, max | 5V |
| Off-state current, max | 1.5 mA |
| On-state current, min | 2 mA @ 10V DC |
| On-state current, max | 3.5 mA @ 30V DC |
| Inrush current, max | 250 mA (decaying to <37% in 22 ms, without activation) |
| Input impedance, max | 8.6 k Ω @ 30V DC |
| Cyclic update time | 200 μ s...750 ms |
| Change of state | Software configurable |
| Time stamp of inputs | \pm 200 μ s |
| Isolation voltage | 250V (continuous), basic insulation type, inputs-to-backplane, and input group-to-group No isolation between individual group inputs |
| Module keying | Electronic, software configurable |

Technical Specifications (Continued)

| Attribute | 1756-IV32, 1756-IV32K |
|-----------------------------|------------------------------------|
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 - on signal ports ⁽¹⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |
| Reverse polarity protection | Yes |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IV32, 1756-IV32K |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1k Hz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IV32, 1756-IV32K |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-0B8

ControlLogix DC (10...30V) output module

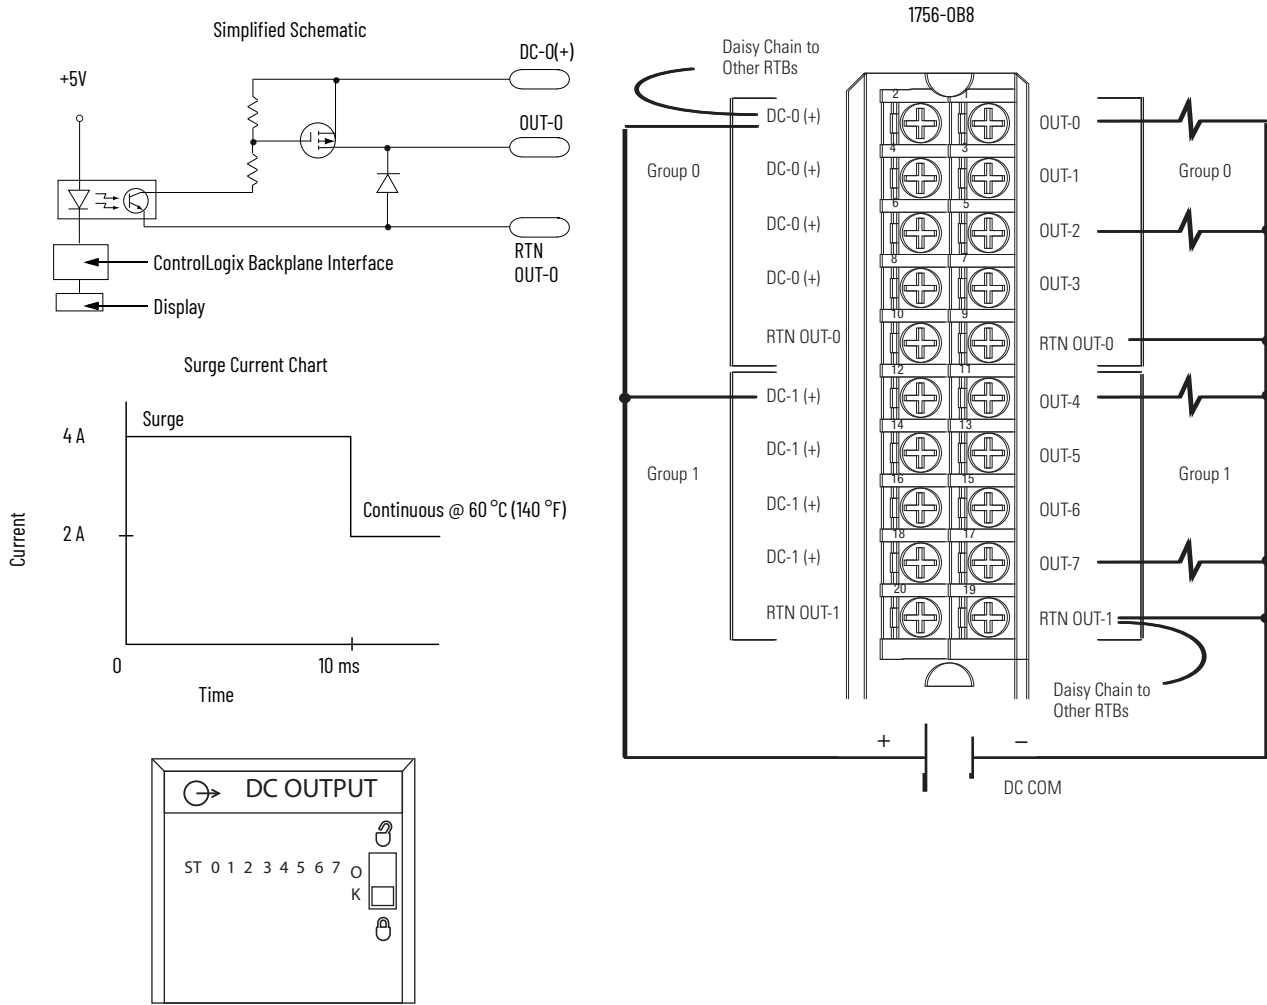

Technical Specifications

| Attribute | 1756-0B8 |
|---|---|
| Outputs | 8 (4 points/common) |
| Pilot duty | Yes |
| Voltage category | 12/24V DC source |
| Operating voltage range | 10...30V DC |
| Output delay time Off to On On to Off | 1 ms max 2 ms max |
| Current draw @ 5.1V | 165 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 0.89 W |
| Power dissipation, max | 2.5 W @ 60 °C (140 °F) |
| Thermal dissipation | 8.53 BTU/hr |
| Off-state leakage current, max | 1 mA per point |
| On-state voltage drop, max | 1.2V DC @ 2 A |
| Current per point, max | 2 A @ 60 °C (140 °F) |
| Current per module, max | 8 A @ 60 °C (140 °F) |
| Surge current per point | 4 A for 10 ms each, repeatable every 1 s @ 60 °C (140 °F) |
| Load current, min | 2 mA per point |

Technical Specifications (Continued)

| Attribute | 1756-0B8 |
|----------------------------------|--|
| Scheduled outputs | Synchronization within 16.7 s max, reference to the Coordinated System Time |
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| States in Program mode per point | Hold last state, On or Off (Off is default) |
| Isolation voltage | 250V (continuous), basic insulation type, outputs-to-backplane, and output group-to-group No isolation between individual group outputs |
| Module keying | Electronic, software configurable |
| Fusing | Not protected. A fused IFM is recommended to help protect outputs |
| Removable terminal block | 1756-TBNH 1756-TBSH |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽¹⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-0B8 |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |





Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-0B8 |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-OB8EI

ControlLogix DC (10...30V) electronically fused, isolated output module

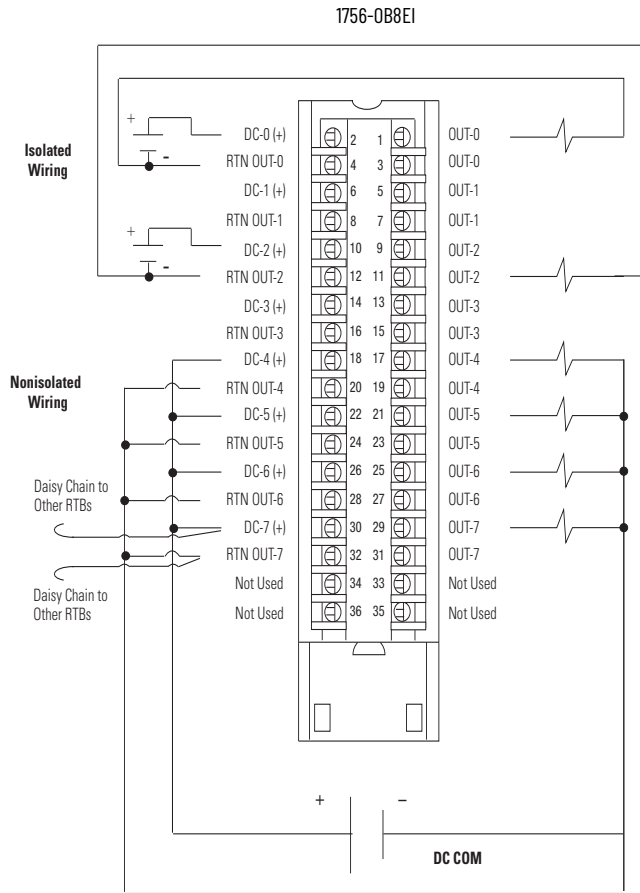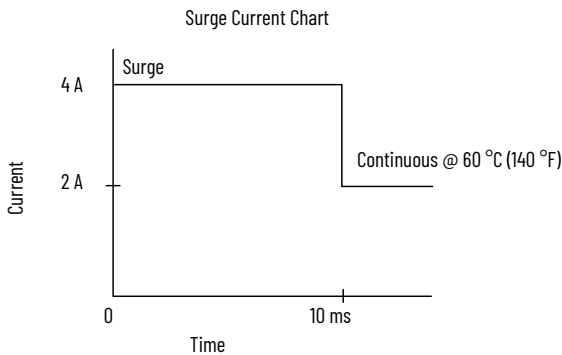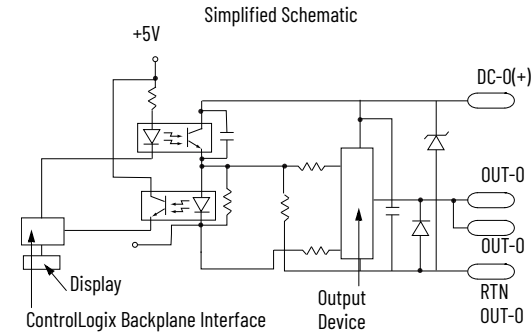

Diagnostic Specifications

| Attribute | 1756-OB8EI |
|---------------------------|--|
| Short trip | > 4.5 A for 500 μ s max (output on, then short) > 4.5 A for 1.5 ms max (output on into short) |
| Time stamp of diagnostics | \pm 1 ms |

Technical Specifications

| Attribute | 1756-OB8EI |
|---|-------------------------|
| Outputs | 8 individually isolated |
| Pilot duty | Yes |
| Voltage category | 12/24V DC source |
| Operating voltage range | 10...30V DC |
| Output delay time Off to On On to Off | 1 ms max 5 ms max |
| Current draw @ 5.1V | 250 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 1.30 W |

Technical Specifications (Continued)

| Attribute | 1756-OB8EI |
|----------------------------------|--|
| Power dissipation, max | 4.7 W @ 60 °C (140 °F) |
| Thermal dissipation | 16.03 BTU/hr |
| Off-state leakage current, max | 1 mA per point |
| On-state voltage drop, max | 1.2V DC @ 2 A |
| Current per point, max | 2 A @ 60 °C (140 °F) |
| Current per module, max | 10 A @ 60 °C (140 °F) 16 A @ 55 °C (131 °F) linear derating |
| Surge current per point | 4 A for 10 ms each, repeatable every 2 s |
| Load current, min | 3 mA |
| Scheduled outputs | Synchronization within 16.7 s max, reference to the Coordinated System Time |
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| States in Program mode per point | Hold last state, On or Off (Off is default) |
| Isolation voltage | 250V (continuous), basic insulation type, outputs-to-backplane, and output-to-output |
| Module keying | Electronic, software configurable |
| Fusing | Electronically fused per point |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽¹⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-OB8EI |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |

Environmental Specifications (Continued)

| Attribute | 1756-0B8E1 |
|---|--|
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |





Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-0B8E1 |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 2020122309111830, 2020122309111998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-OB16D, 1756-OB16DK

ControlLogix DC (19.2...30V) diagnostic output module

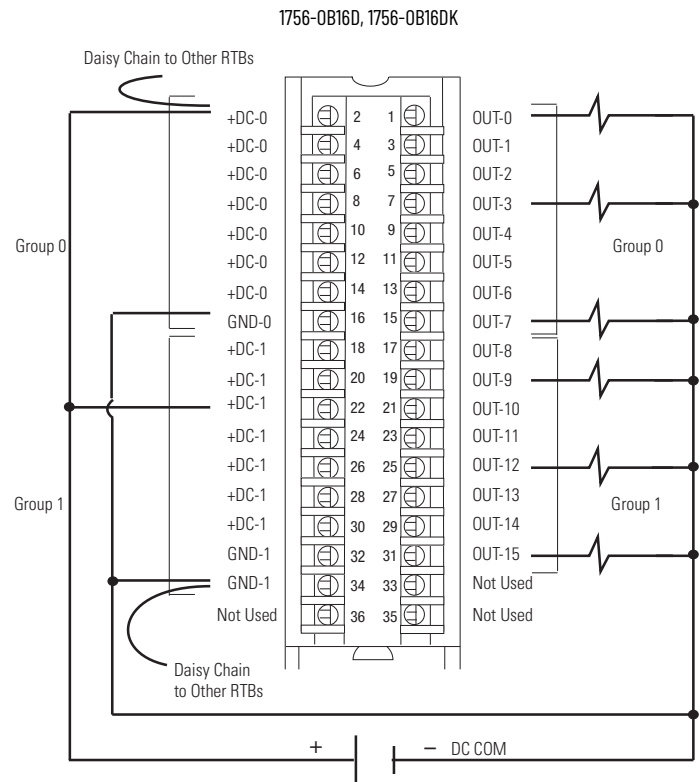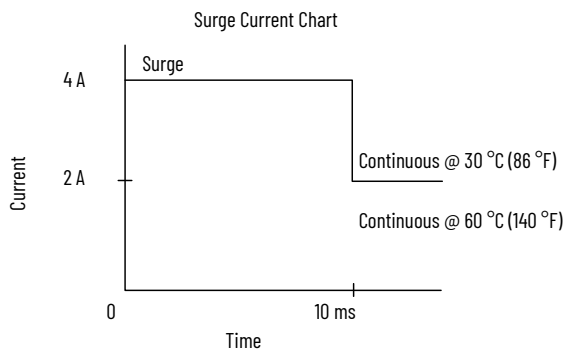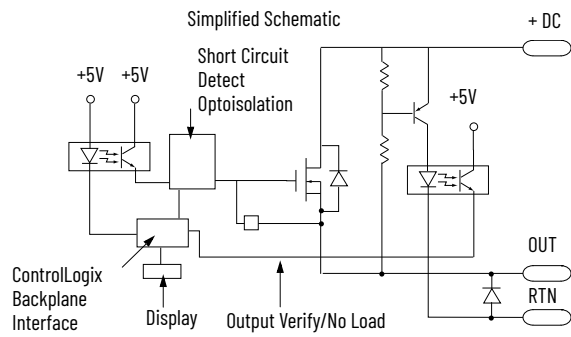

Diagnostic Specifications

| Attribute | 1756-OB16D, 1756-OB16DK |
|---------------------------|---|
| Short trip | 8 A for 180 ms, min 10 A for 120 ms, min |
| No load | Off-state detection only |
| Output verification | On-state detection only |
| Pulse test | Configurable maximum pulse width |
| Time stamp of diagnostics | ±1 ms |

Technical Specifications

| Attribute | 1756-OB16D, 1756-OB16DK |
|---|---|
| Outputs | 16 diagnostic (8 points/group) |
| Pilot duty (DC-13SQ) | 2 A @ 30 °C (86 °F) 1 A @ 60 °C (140 °F) |
| Voltage category | 24V DC source |
| Operating voltage range | 19.2...30V DC |
| Output delay time Off to On On to Off | 60 µs nom/1 ms max 630 µs nom/5 ms max |
| Current draw @ 5.1V | 250 mA |
| Current draw @ 24V | 140 mA |

Technical Specifications (Continued)

| Attribute | 1756-OB16D, 1756-OB16DK |
|--|--|
| Total backplane power | 4.64 W |
| Power dissipation, max | 3.3 W @ 60 °C (140 °F) |
| Thermal dissipation | 11.25 BTU/hr |
| Off-state leakage current per point, max | 1 mA per point |
| On-state voltage drop, max | 1.2V DC @ 2 A |
| Current per point, max | 2 A @ 30 °C (86 °F) linear derating 1 A @ 60 °C (140 °F) linear derating |
| Current per module, max | 8 A @ 30 °C (86 °F) linear derating 4 A @ 60 °C (140 °F) linear derating |
| Surge current per point | 4 A for 10 ms per point, repeatable every 1 s |
| Load current, min | 3 mA per point |
| Scheduled outputs | Synchronization within 16.7 s max, reference to the Coordinated System Time |
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| States in Program mode per point | Hold last state, On or Off (Off is default) |
| Isolation voltage | 250V (continuous), basic insulation type, outputs-to-backplane, and output group-to-group No isolation between individual group outputs |
| Module keying | Electronic, software configurable |
| Fusing | Electronically fused per point |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 7 ⁽¹⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-OB16D, 1756-OB16DK |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0 °C < Ta < 60 °C (32 °F < Ta < 140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1k Hz sine wave 80% AM from 2000...2700 MHz |

Environmental Specifications (Continued)

| Attribute | 1756-OB16D, 1756-OB16DK |
|---|--|
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |




Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-OB16D, 1756-OB16DK |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2004/108/EC EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: <ul style="list-style-type: none"> EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: <ul style="list-style-type: none"> EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0; Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7; Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0; Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7; Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |






(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-OB16E, 1756-OB16EK

ControlLogix DC (10...31.2V) electronically fused output module

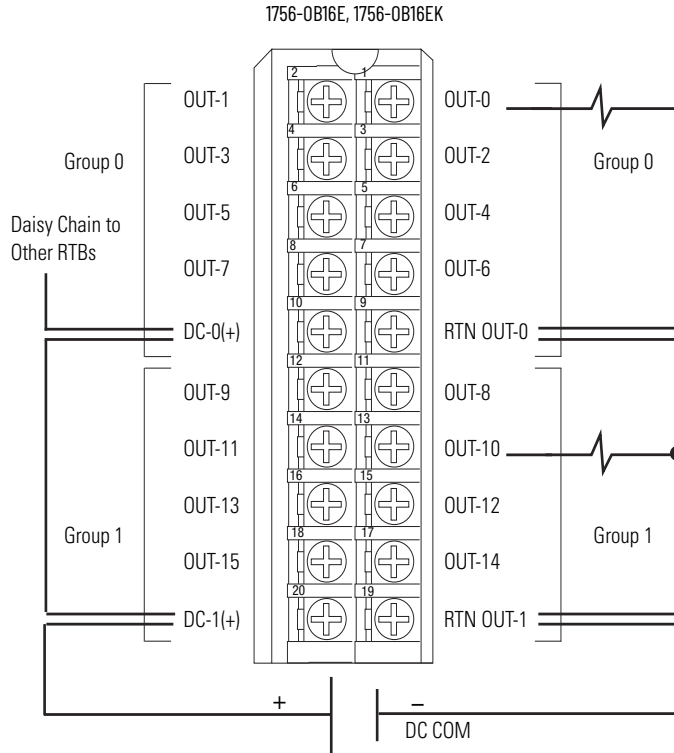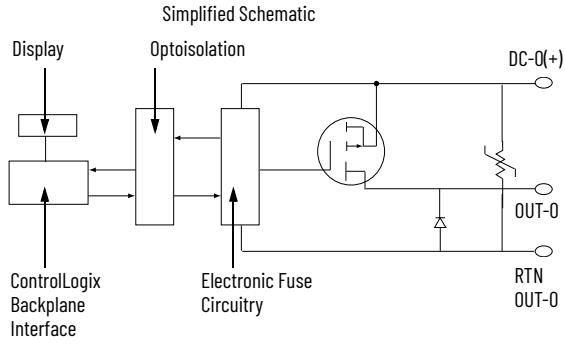

Surge Current Charts

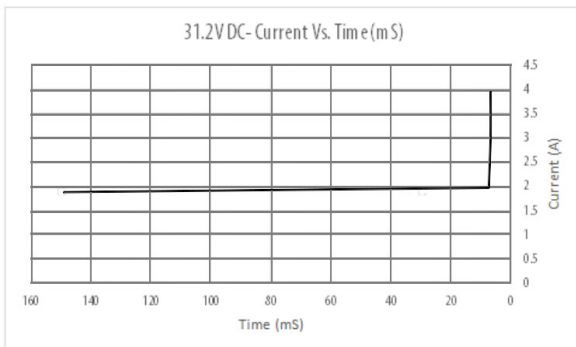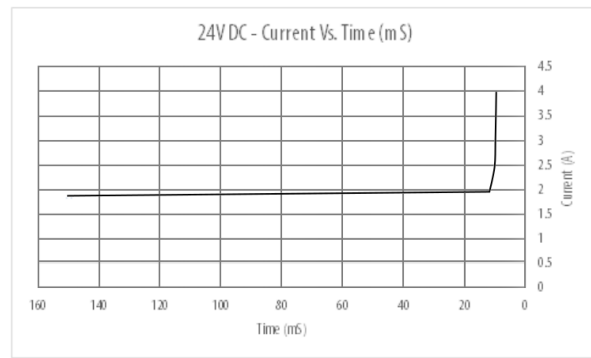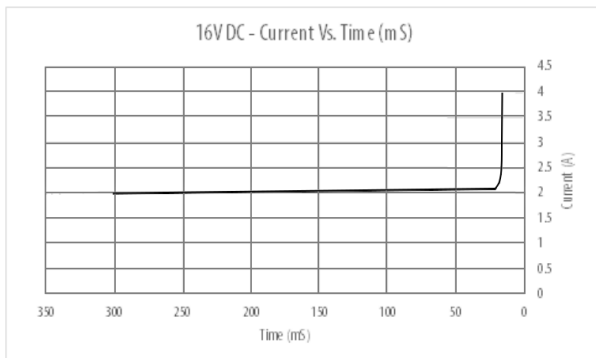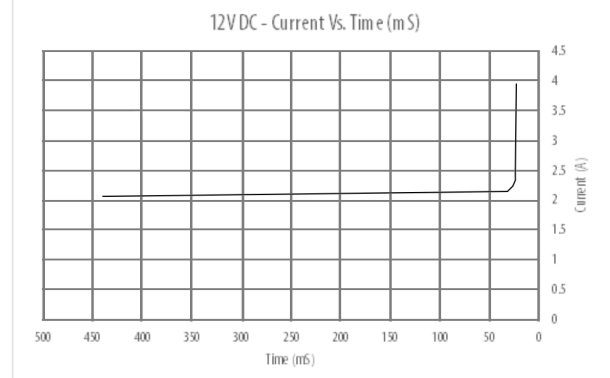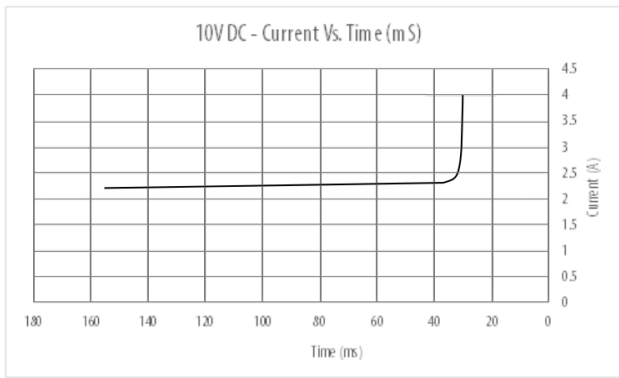

Technical Specifications

| Attribute | 1756-OB16E, 1756-OB16EK |
|--|---|
| Outputs | 16 electronically fused (8 points/group) |
| Voltage category | 12/24V DC source |
| Operating voltage range | 10...31.2V DC |
| Output delay time | |
| Off to On | 70 μ s nom/1 ms max |
| On to Off | 360 μ s nom/1 ms max |
| Current draw @ 5.1V | 250 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 1.32 W |
| Power dissipation, max | 4.1 W @ 60 °C (140 °F) |
| Thermal dissipation | 13.98 BTU/hr |
| Off-state leakage current per point, max | 1 mA per point |
| On-state voltage drop, max | 400 mV DC @ 1 A |
| Current per point, max | 1 A @ 60 °C (140 °F) |
| Current per module, max | 8 A @ 60 °C (140 °F) |
| Surge current per point, typical | 2 A for 10 ms per point, repeatable every 2 s @ 0 °C (32 °F) @ 24V DC |

Technical Specifications (Continued)

| Attribute | 1756-OB16E, 1756-OB16EK |
|----------------------------------|--|
| Load current, min | 3 mA per point |
| Scheduled outputs | Synchronization within 16.7 s max, reference to the Coordinated System Time |
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| States in Program mode per point | Hold last state, On or Off (Off is default) |
| Isolation voltage | 250V (continuous), basic insulation type, outputs-to-backplane, and output group-to-group No isolation between individual group outputs |
| Module keying | Electronic, software configurable |
| Fusing | Electronically fused per group |
| Removable terminal block | 1756-TBNH 1756-TBSH |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽¹⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-OB16E, 1756-OB16EK |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |
| Oscillatory surge withstand IEEE C37.90.1 | 3 kV |

Certifications


| Certification (when product is marked) ⁽¹⁾ | 1756-OB16E, 1756-OB16EK |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.



1756-OB16I

ControlLogix 24V DC isolated output module


Simplified Schematic

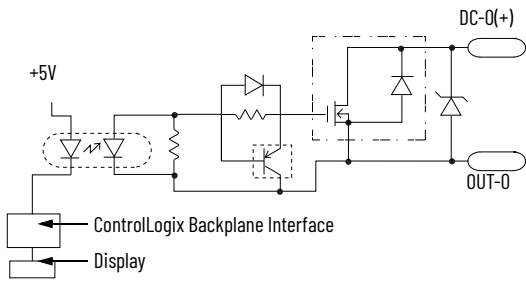

Surge Current Chart

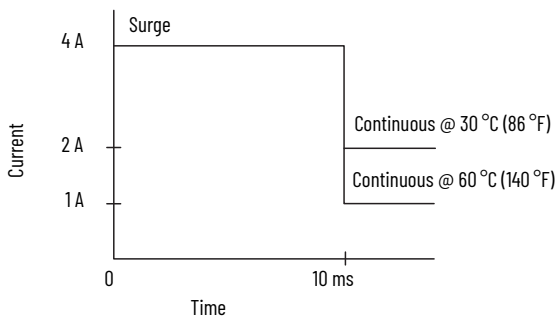

1756-OB16I

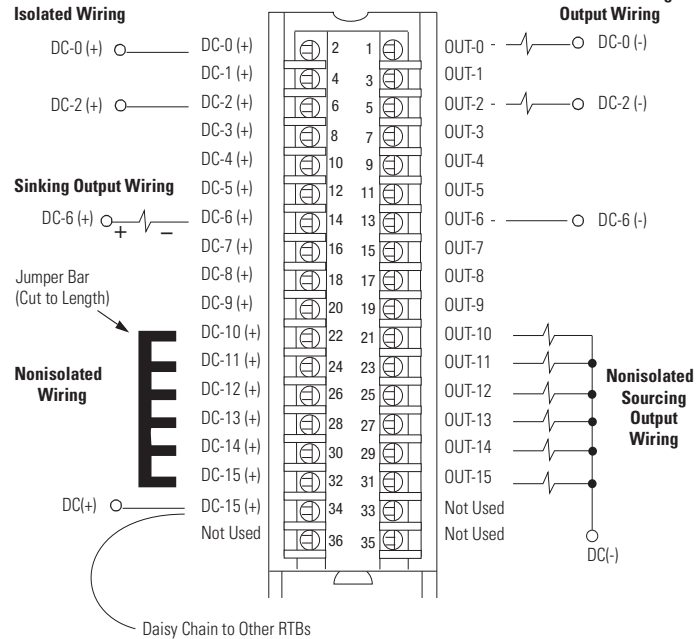

Additional jumper bars are available as catalog number 1756-JMPR.

Technical Specifications

| Attribute | 1756-OB16I |
|--|---|
| Outputs | 16 individually isolated |
| Pilot duty | 2 A (DC-13SQ) |
| Voltage category | 12/24V DC sink/source |
| Operating voltage range ⁽¹⁾ | 10...30V DC |
| Output delay time | |
| Off to On | 1 ms max |
| On to Off | 2 ms max |
| Current draw @ 5.1V | 350 mA |
| Current draw @ 24V | 2.5 mA |
| Total backplane power | 1.8 W |
| Power dissipation, max | 3.6 W @ 60 °C (140 °F) |
| Thermal dissipation | 12.28 BTU/hr |
| Off-state leakage current per point, max | 0.5 mA per point |
| On-state voltage drop, max | 1.2V DC @ 2 A |
| Current per point, max | 2 A @ 30 °C (86 °F) 1 A @ 60 °C (140 °F) (linear derating) |

Technical Specifications (Continued)

| Attribute | 1756-OB16I |
|----------------------------------|--|
| Current per module, max | 8 A @ 30 °C (86 °F) 4 A @ 60 °C (140 °F) (linear derating) |
| Surge current per point | 4 A for 10 ms per point, repeatable every 2 s |
| Load current, min | 1 mA per point |
| Scheduled outputs | Synchronization within 16.7 s max, reference to the Coordinated System Time |
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| States in Program mode per point | Hold last state, On or Off (Off is default) |
| Isolation voltage | 250V (continuous), basic insulation type, outputs-to-backplane 125V (continuous), basic insulation type, output-to-output |
| Module keying | Electronic, software configurable |
| Fusing | Not protected. A fused IFM is recommended to help protect outputs. |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽²⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |

(1) UL certification for 24V DC nominal. Rockwell Automation specified to 10...30V DC.

(2) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-OB16I |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |




Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-0B16I |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |


(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-OB16IEF, 1756-OB16IEFK

ControlLogix DC (10...30V) electronically protected, sinking, or sourcing, isolated, fast output module

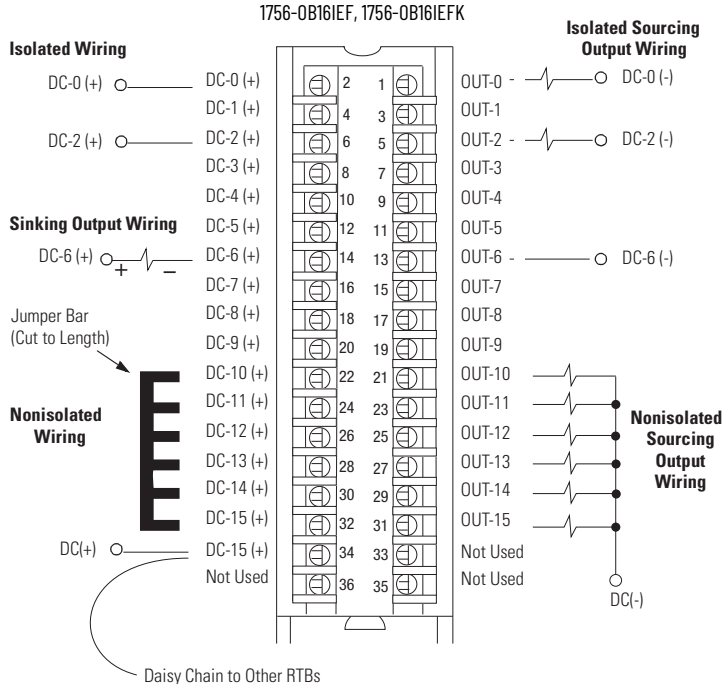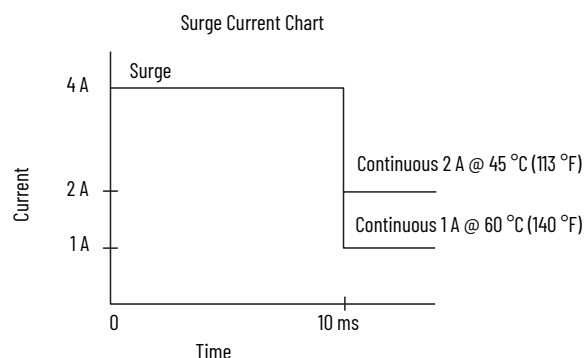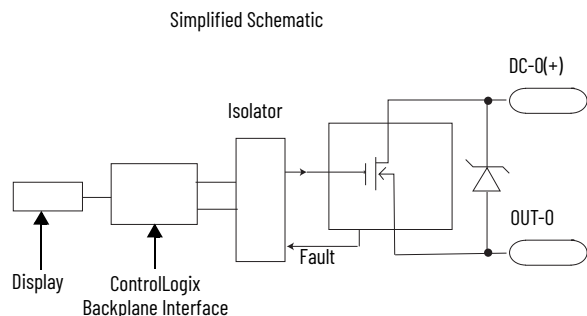

Additional jumper bars can be purchased by using catalog number 1756-JMPR.



Technical Specifications

| Attribute | 1756-OB16IEF, 1756-OB16IEFK |
|--|---|
| Outputs | 16 individually isolated |
| Pilot duty | 4 A inrush |
| Voltage category | 12/24V DC sink/source |
| Operating voltage range | 10...30V DC |
| Output delay time (backplane to screw) | |
| Off to On | 14 μs nom/23 μs max |
| On to Off | 14 μs nom/23 μs max |
| PWM cycle time | 1 ms min/1 hour max |
| PWM On time | 200 μs min/1 hour max |
| PWM On time accuracy | ± 20 μs |
| Current draw @ 5.1V | 320 mA |
| Current draw @ 24V | 3 mA |
| Total backplane power | 1.7 W |
| Power dissipation | 4.9 W max (16 channels @ 1 A or 4 channels @ 2 A) |
| Thermal dissipation | 16.71 BTU/hr |
| Off-state leakage current per point, max | < 0.1 mA per point |

Technical Specifications (Continued)

| Attribute | 1756-OB16IEF, 1756-OB16IEFK |
|---|---|
| On-state voltage drop, max | 0.2V DC @ 1 A 0.4V DC @ 2 A |
| Current per point, max | 2 A @ 45 °C (113 °F) 4 channels max 1 A @ 60 °C (140 °F) |
| Current per module, max | 16 A @ 60 °C (140 °F) 1 A max per channel 8 A @ 45 °C (113 °F) 2 A max per channel |
| Surge current per point | 4 A for 10 ms per point, repeatable every 2 s |
| Load current, min | 1 mA per point |
| Scheduled outputs | CIP Sync™ only |
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| Duration of Fault mode per point | 1, 2, 5, 10 s, Forever (Forever is default) |
| Final state after Fault mode duration per point | On or Off (default is Off) |
| States in Program mode per point | Hold last state, On or Off (default is Off) |
| Isolation voltage | 250V (continuous), reinforced insulation type, outputs-to-backplane 250V (continuous), basic insulation type, output-to-output |
| Module keying | Electronic, software configurable |
| Fusing | Electronically fused per point |
| Reverse polarity protection | No |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 on signal ports ⁽¹⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-OB16IEF, 1756-OB16IEFK |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-OB16IEF, 1756-OB16IEFK |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> • EN 61326-1; Meas./Control/Lab., Industrial Requirements • EN 61000-6-2; Industrial Immunity • EN 61000-6-4; Industrial Emissions • EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> • EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements • EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" • II 3 G Ex ec IIC T4 Gc • UL22ATEX2820X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> • IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements • IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" • II 3 G Ex ec IIC T4 Gc • IECEX UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> • Schedule 1 of the UKEX Regulation 2016 No. 1107 • Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> • 2016 No. 1091, Electromagnetic Compatibility Regulations • 2016 No. 1101, Electrical Equipment (Safety) Regulations • 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations • 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> • Arrêté ministériel n° 6404-15 du 1 er muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension • Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 2020122309111830, 2020122309111998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |


(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-OB16IEFS

ControlLogix DC (10...30V) scheduled, electronically protected, sinking, or sourcing, isolated, fast output module

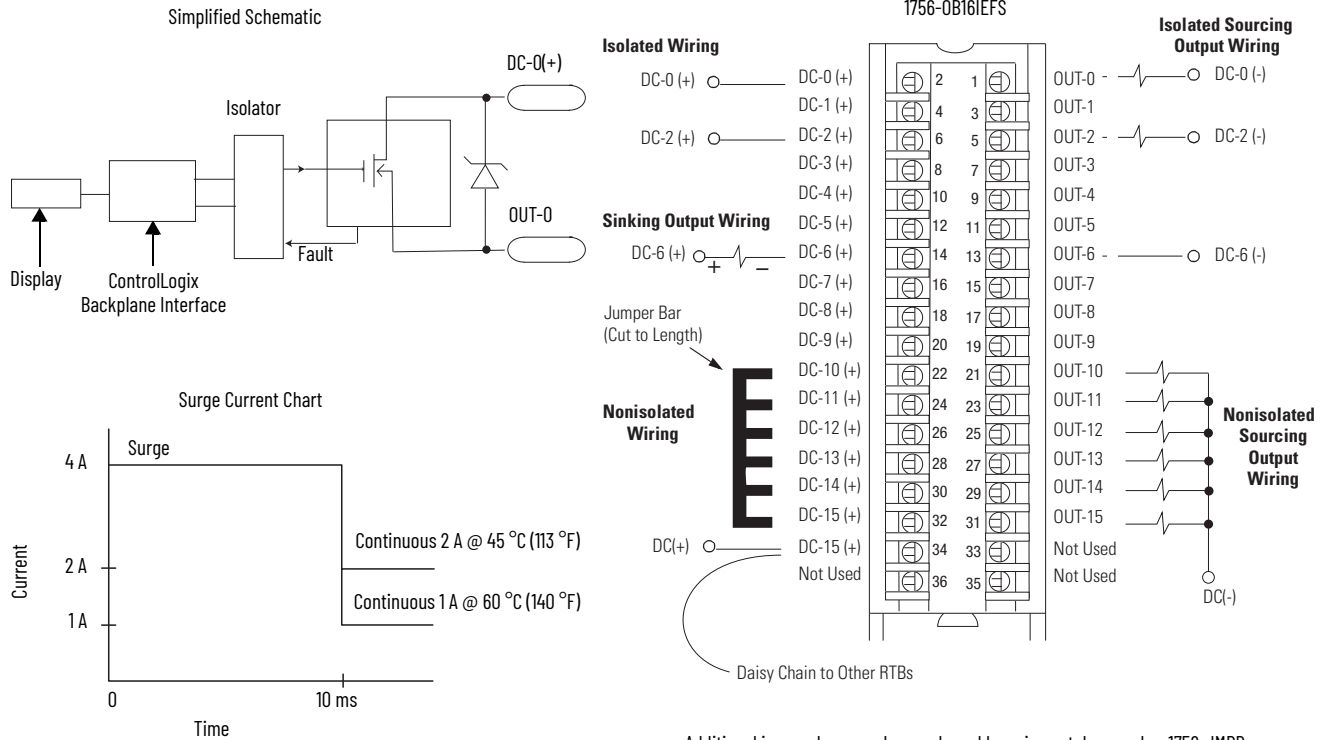

Additional jumper bars can be purchased by using catalog number 1756-JMPR.



Technical Specifications

| Attribute | 1756-OB16IEFS |
|--|--|
| Outputs | 16 scheduled, individually isolated |
| Pilot duty | 4 A inrush |
| Voltage category | 12/24V DC sink/source |
| Operating voltage range | 10...30V DC |
| Unscheduled output delay time (backplane to screw) | |
| Off to On | 14 μs nom/23 μs max |
| On to Off | 14 μs nom/23 μs max |
| Schedule accuracy | ± 10 μs nom when all components are synchronized to the current CIP Sync Grandmaster |
| PWM cycle time | 1 ms min/1 hour max |
| PWM On time | 200 μs min/1 hour max |
| PWM On-time accuracy | ± 20 μs |

Technical Specifications (Continued)

| Attribute | 1756-OB16IEFS |
|---|---|
| Current draw @ 5.1V | 320 mA |
| Current draw @ 24V | 3 mA |
| Total backplane power | 1.7 W |
| Power dissipation | 4.9 W max (16 channels @ 1 A or 4 channels @ 2 A) |
| Thermal dissipation | 16.71 BTU/hr |
| Off-state leakage current per point, max | < 0.1 mA per point |
| On-state voltage drop, max | 0.2V DC @ 1 A 0.4V DC @ 2 A |
| Current per point, max | 2 A @ 45 °C (113 °F) 4 channels max 1 A @ 60 °C (140 °F) |
| Current per module, max | 16 A @ 60 °C (140 °F) 1 A max per channel 8 A @ 45 °C (113 °F) 2 A max per channel |
| Surge current per point | 4 A for 10 ms per point, repeatable every 2 s |
| Load current, min | 1 mA per point |
| Scheduled outputs | CIP Sync only |
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| Duration of Fault mode per point | 1, 2, 5, 10 s, Forever (Forever is default) |
| Final state after Fault mode duration per point | On or Off (default is Off) |
| States in Program mode per point | Hold last state, On or Off (default is Off) |
| Isolation voltage | 250V (continuous), reinforced insulation type, outputs-to-backplane 250V (continuous), basic insulation type, output-to-output |
| Module keying | Electronic, software configurable |
| Fusing | Electronically fused per point |
| Reverse polarity protection | No |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 on signal ports ⁽¹⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-OB16IEFS |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |




Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-OB16IEFS |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 2020122309111830, 2020122309111998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-OB16IS

ControlLogix 24V DC scheduled, isolated output module

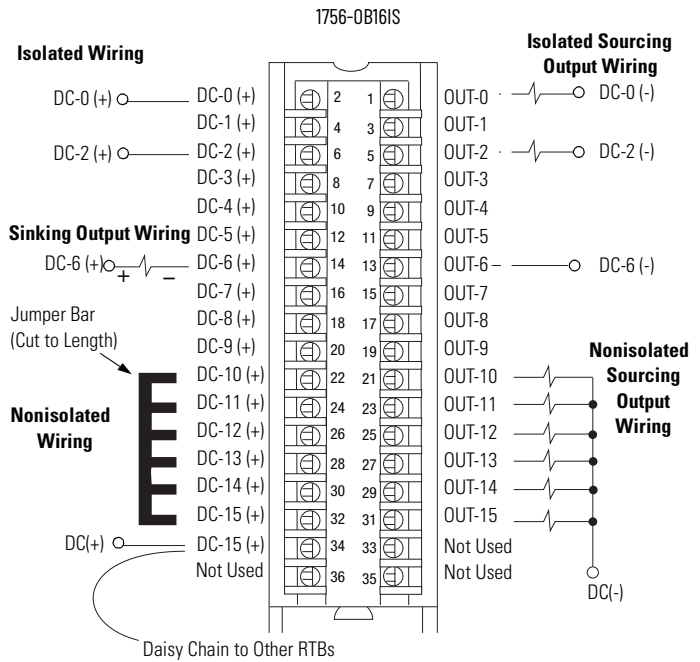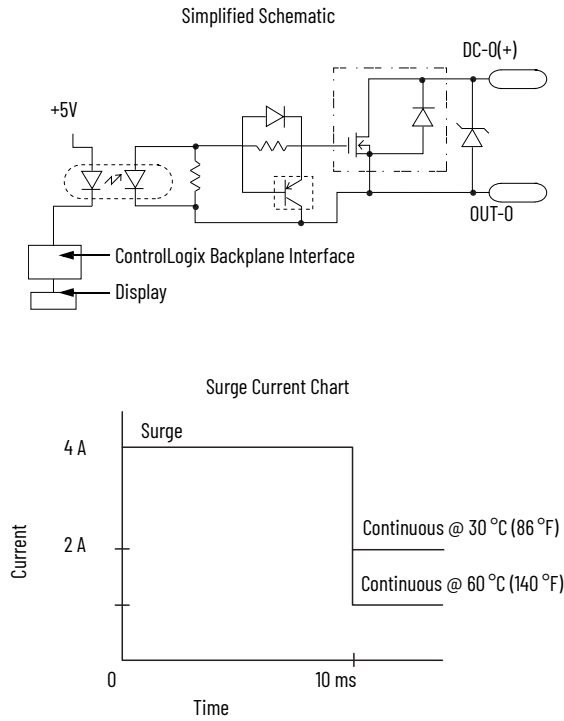

Additional jumper bars are available as catalog number 1756-JMPR.

Technical Specifications

| Attribute | 1756-OB16IS |
|--|---|
| Outputs | 16 individually isolated, 8 scheduled |
| Pilot duty | 2 A (DC-13SQ) |
| Voltage category | 12/24V DC sink/source |
| Operating voltage range ⁽¹⁾ | 10...30V DC |
| Output delay time | |
| Off to On | 1 ms max |
| On to Off | 2 ms max |
| Current draw @ 5.1V | 350 mA |
| Current draw @ 24V | 2.5 mA |
| Total backplane power | 1.8 W |
| Power dissipation, max | 3.6 W @ 60 °C (140 °F) |
| Thermal dissipation | 12.28 BTU/hr |
| Off-state leakage current per point, max | 0.5 mA per point |
| On-state voltage drop, max | 1.2V DC @ 2 A |
| Current per point, max | 2 A @ 30 °C (86 °F) 1 A @ 60 °C (140 °F) (linear derating) |
| Current per module, max | 8 A @ 30 °C (86 °F) 4 A @ 60 °C (140 °F) (linear derating) |

Technical Specifications (Continued)

| Attribute | 1756-0B16IS |
|----------------------------------|--|
| Surge current per point | 4 A for 10 ms per point, repeatable every 2 s |
| Load current, min | 1 mA per point |
| Scheduled outputs | Synchronization within 16.7 s max, reference to the Coordinated System Time |
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| States in Program mode per point | Hold last state, On or Off (Off is default) |
| Isolation voltage | 250V (continuous), basic insulation type, outputs-to-backplane, and output-to-output |
| Module keying | Electronic, software configurable |
| Fusing | Not protected. A fused IFM can be used to help protect outputs. See publication 1492-TD008 . However, the ControlLogix system has been agency certified using only the ControlLogix RTBs, that is, 1756-TBCH, 1756-TBNH, 1756-TBSH, and 1756-TBS6H. Any application that requires agency certification of the ControlLogix system that uses other wiring termination methods can require application-specific approval by the certifying agency. |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽²⁾ |
| Wire type | Copper |
| Enclosure type | None (open-style) |
| Temperature code | T4 |

(1) UL certification for 24V DC nominal. Rockwell Automation specified to 10...30V DC

(2) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-0B16IS |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-0B16IS |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 2020122309111830, 2020122309111998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-OB32, 1756-OB32K

ControlLogix DC (10...31.2V) output module

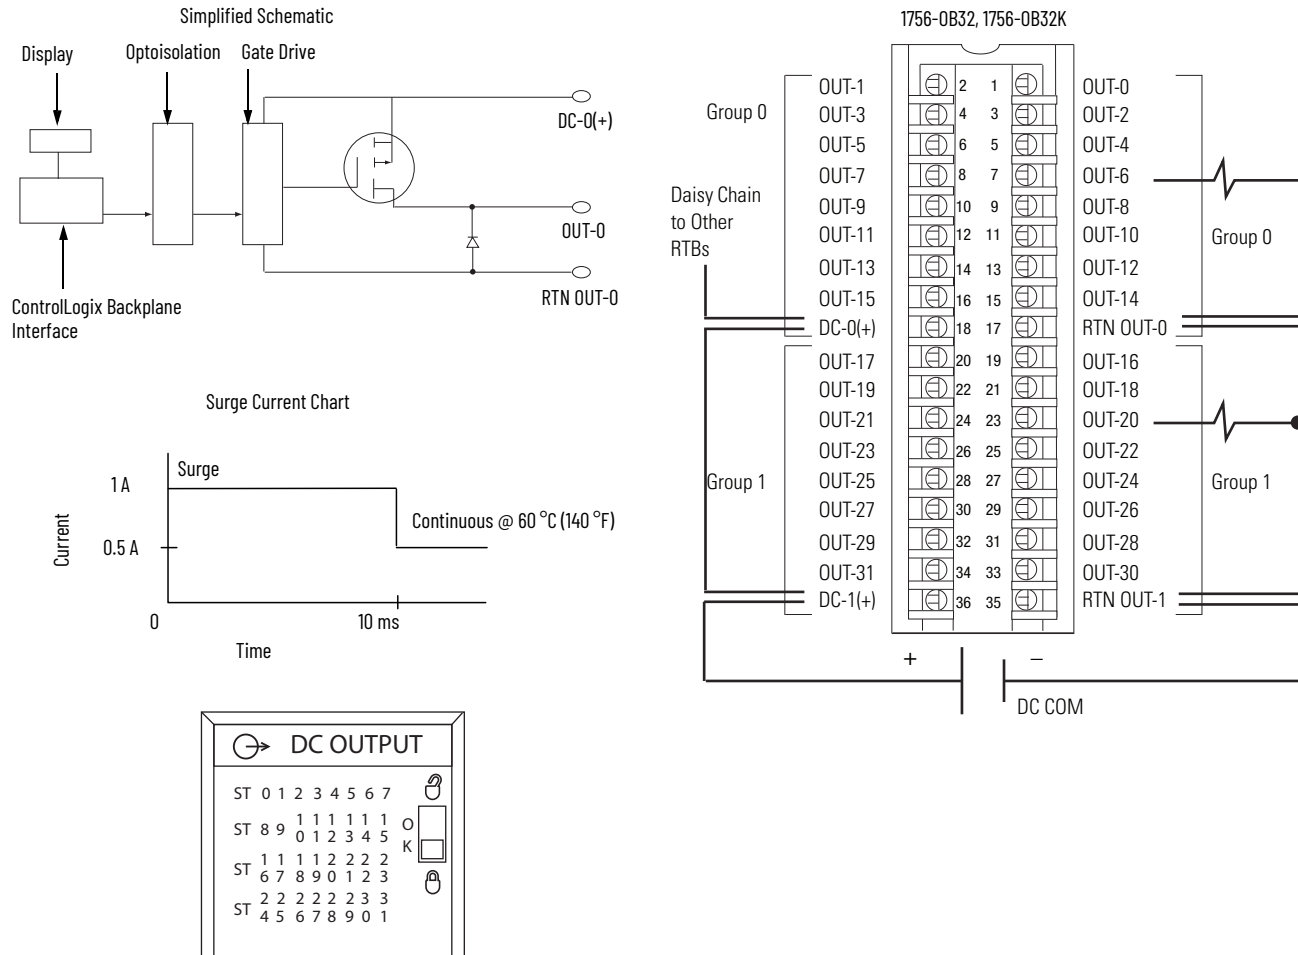

Technical Specifications

| Attribute | 1756-OB32, 1756-OB32K |
|---|---|
| Outputs | 32 (16 points/group) |
| Voltage category | 12/24V DC source |
| Operating voltage range | 10...31.2V DC |
| Output delay time Off to On On to Off | 60 μ s nom/1 ms max 200 μ s nom/1 ms max |
| Current draw @ 5.1V | 300 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 1.58 W |
| Power dissipation, max | 4.8 W @ 60 °C (140 °F) |
| Thermal dissipation | 16.37 BTU/hr |
| Off-state leakage current per point, max | 0.5 mA per point |
| On-state voltage drop, max | 200 mV DC @ 0.5 A |
| Current per point, max | 0.5 A @ 50 °C (122 °F) linear derating 0.35 A @ 60 °C (140 °F) |
| Current per module, max | 16 A @ 50 °C (122 °F) linear derating 10 A @ 60 °C (140 °F) |
| Surge current per point, max | 1 A for 10 ms per point, repeatable every 2 s @ 60 °C (140 °F) |
| Load current, min | 3 mA per point |

Technical Specifications (Continued)

| Attribute | 1756-OB32, 1756-OB32K |
|----------------------------------|--|
| Scheduled outputs | Synchronization within 16.7 s max, reference to the Coordinated System Time |
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| States in Program mode per point | Hold last state, On or Off (Off is default) |
| Isolation voltage | 250V (continuous), basic ⁽¹⁾ insulation type, outputs to backplane. 125V (continuous), basic insulation type, outputs group to group. No isolation between individual outputs. |
| Module keying | Electronic, software configurable |
| Fusing | Not protected. A fused IFM can be used to help protect outputs. See publication 1492-TD008 . However, the ControlLogix system has been agency certified using only the ControlLogix RTBs, that is, 1756-TBCH, 1756-TBNH, 1756-TBSH, and 1756-TBS6H. Any application that requires agency certification of the ControlLogix system that uses other wiring termination methods can require application-specific approval by the certifying agency. |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽²⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |

(1) Per IEC 61010-1 terminology, the insulation type is basic. Per older UL508 terminology, the insulation type is reinforced.

(2) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-OB32, 1756-OB32K |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |





Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-0B32, 1756-0B32K |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 2020122309111830, 2020122309111998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-OC8

ControlLogix DC (30...60V) output module

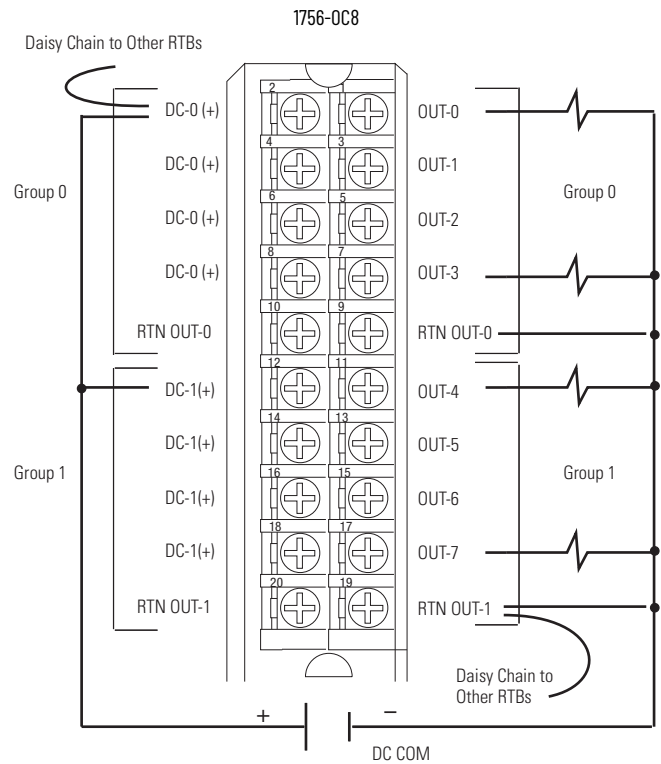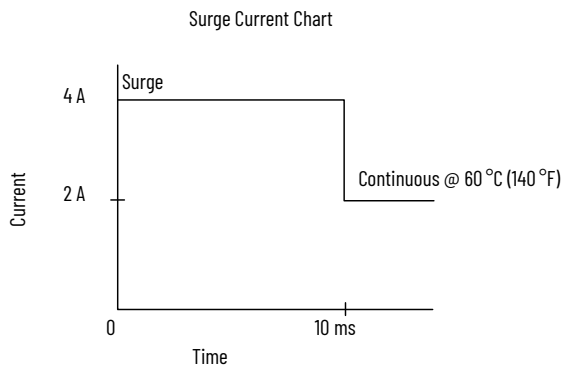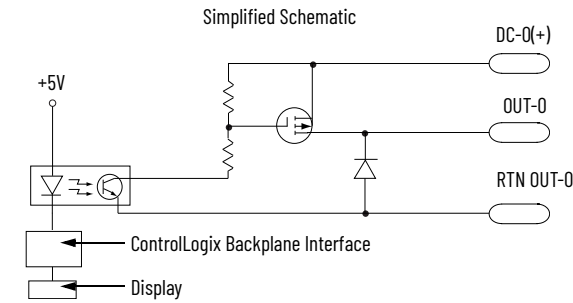

Technical Specifications

| Attribute | 1756-OC8 |
|---|--|
| Outputs | 8 (4 points/group) |
| Pilot duty | 2 A |
| Voltage category | 48V DC source |
| Operating voltage range | 30...60V DC |
| Output delay time Off to On On to Off | 1 ms, max 2 ms, max |
| Current draw @ 5.1V | 165 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 0.89 W |
| Power dissipation, max | 4.9 W @ 60 °C (140 °F) |
| Thermal dissipation | 16.71 BTU/hr |
| Off-state leakage current, max | 1 mA per point |
| On-state voltage drop, max | 2V DC @ 2 A |
| Current per point, max | 2 A @ 60 °C (140 °F) |
| Current per module, max | 8 A @ 60 °C (140 °F) |
| Surge current per point | 4 A for 10 ms per point, repeatable every 1 s @ 60 °C (140 °F) |

Technical Specifications (Continued)

| Attribute | 1756-OC8 |
|----------------------------------|--|
| Load current, min | 2 mA per point |
| Scheduled outputs | Synchronization within 16.7 s max, reference to the Coordinated System Time |
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| States in Program mode per point | Hold last state, On or Off (Off is default) |
| Isolation voltage | 250V (continuous), basic insulation type, outputs-to-backplane, and output group-to-group No isolation between individual group outputs |
| Module keying | Electronic, software configurable |
| Fusing | Not protected. A fused IFM is recommended to help protect outputs |
| Removable terminal block | 1756-TBNH 1756-TBSH |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽¹⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-OC8 |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-OC8 |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820X |
| IECEx | IECEx System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEx UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |


(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-0G16


ControlLogix TTL output module

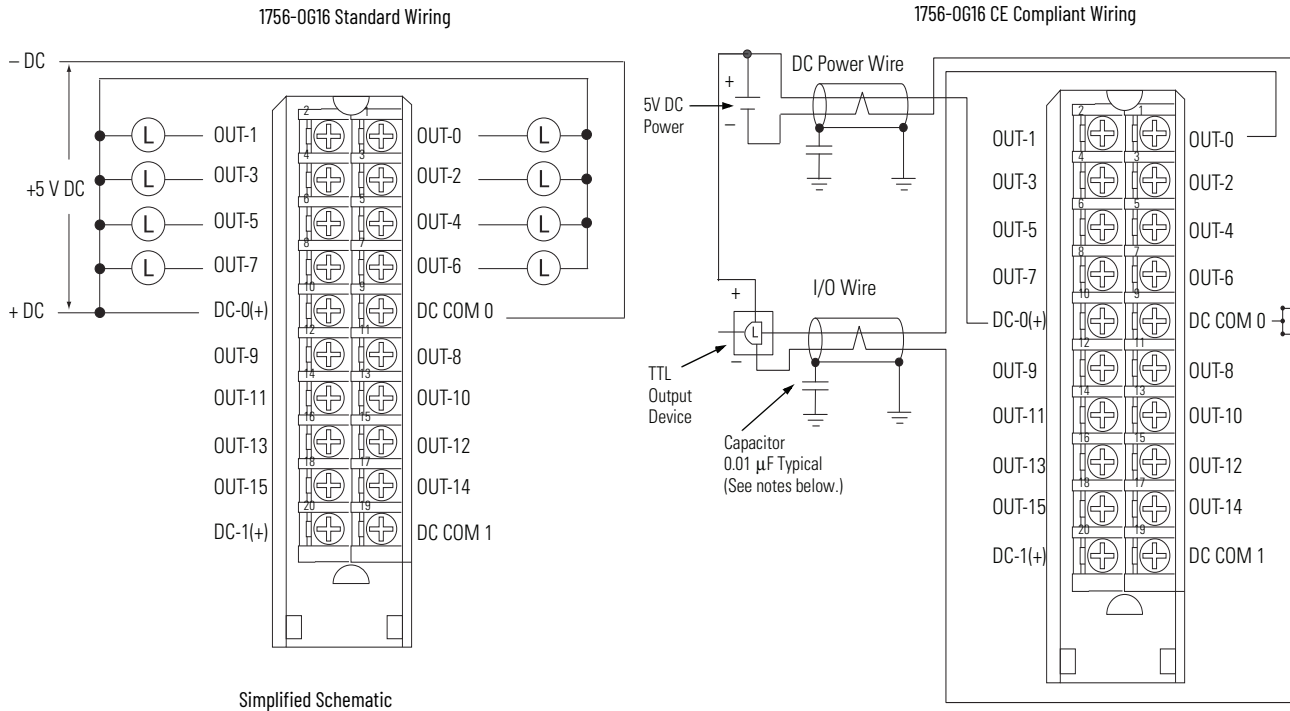

Simplified Schematic

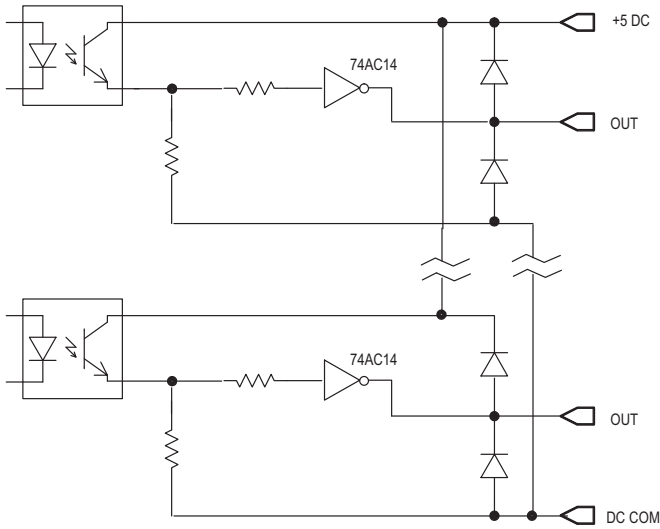

IMPORTANT: I/O cables must be shielded type and cable length must be <10 m (32.8 ft) for maximum EMI noise immunity.



Low to True Format - 1756-0G16

- 0...0.4V DC = Output guaranteed to be in on-state
- 0.4...4.5V DC = Output state not guaranteed
- 4.5...5.5V DC = Output guaranteed to be in off-state

Technical Specifications

| Attribute | 1756-0G16 |
|-------------------------|--|
| Outputs | 16 (8 points/group) |
| Voltage category | 5V DC TTL (Low=True) ⁽¹⁾ |
| Operating voltage range | 4.5...5.5V DC source, 50 mV P-P ripple max |

Technical Specifications (Continued)

| Attribute | 1756-0G16 |
|--|--|
| Output delay time (resistive load) Off to On (5V-to-0V DC transition) On to Off (0V-to-5V DC transition) | 45 μ s nom/450 μ s max 145 μ s nom/700 μ s max |
| Current draw @ 5.1V | 210 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 1.12 W |
| Power dissipation, max | 1.5 W @ 60 °C (140 °F) |
| Thermal dissipation | 5.2 BTU/hr @ 60 °C (140 °F) |
| Off-state leakage current per point, max | 0.1 mA per point |
| On-state voltage drop, max | 0.4V DC |
| Continuous current, max | 24 mA |
| Load current per point, max | 24 mA |
| Load current per module, max | 384 mA |
| Load current | 0.15 mA |
| Scheduled outputs | Synchronization within 16.7 s max, reference to the Coordinated System Time |
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| States in Program mode per point | Hold last state, On or Off (Off is default) |
| Isolation voltage | 250V (continuous), basic insulation type, outputs-to-backplane, and output group-to-group No isolation between individual group outputs |
| Module keying | Electronic, software configurable |
| Fusing | Not protected. A fused IFM is recommended to help protect outputs. |
| Removable terminal block | 1756-TBNH 1756-TBSH |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 2 ⁽²⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |

(1) TTL outputs are inverted (0 to +0.4V DC = low voltage = True = On.) Use a NOT instruction in your program to convert to traditional True - High logic.

(2) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-0G16 |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |

Environmental Specifications (Continued)

| Attribute | 1756-0G16 |
|--|--|
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |





Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-0G16 |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-OH8I

ControlLogix DC (90...146V) isolated output module

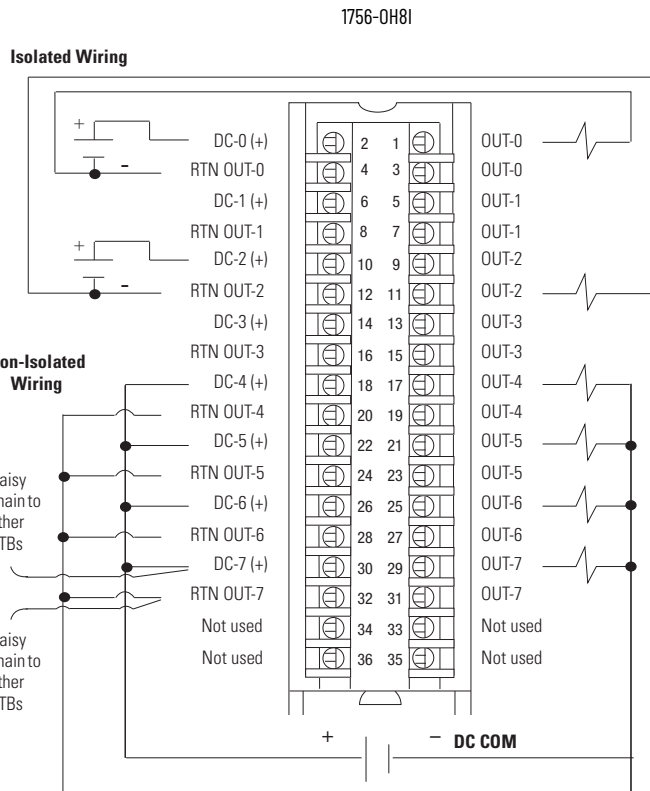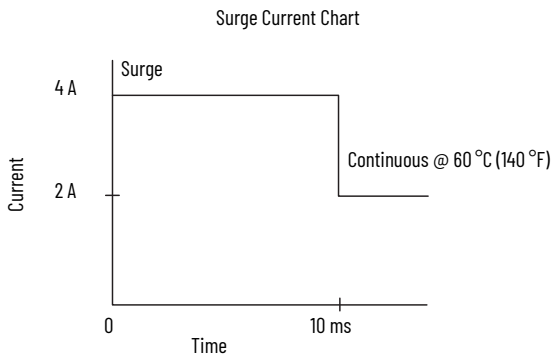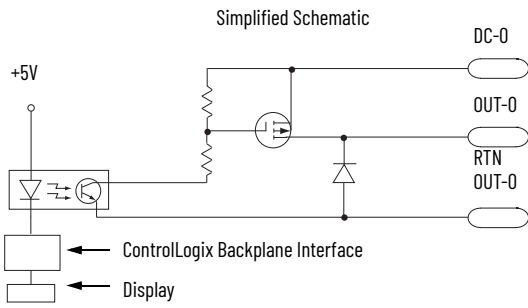

Technical Specifications

| Attribute | 1756-OH8I |
|---|---|
| Outputs | 8 individually isolated |
| Voltage category | 125V DC sink/source |
| Operating voltage range | 90...146V DC |
| Output delay time Off to On On to Off | 2 ms max 2 ms max |
| Current draw @ 5.1V | 210 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 1.11 W |
| Power dissipation, max | 3.3 W @ 60 °C (140 °F) |
| Thermal dissipation | 11.25 BTU/hr |
| Off-state leakage current, max | 1 mA per point |
| On-state voltage drop, max | 2V DC @ 2 A |
| Current per point, max | 2 A @ 60 °C (140 °F) |
| Current per module, max | 8 A @ 60 °C (140 °F) |
| Surge current per point | 4 A for 10 ms per point, repeatable every 1 s @ 60 °C (140 °F) |
| Load current, min | 2 mA per point |
| Scheduled outputs | Synchronization within 16.7 s max, reference to the Coordinated System Time |

Technical Specifications (Continued)

| Attribute | 1756-OH8I |
|----------------------------------|--|
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| States in Program mode per point | Hold last state, On or Off (Off is default) |
| Isolation voltage | 250V (continuous), basic insulation type, outputs-to-backplane, and output-to-output |
| Module keying | Electronic, software configurable |
| Fusing | Not protected. A fused IFM is recommended to help protect outputs. |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽¹⁾ |
| Enclosure type | None (open-style) |
| North American temperature code | T4A |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-OH8I |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 1V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-OH8I |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> • EN 61326-1; Meas./Control/Lab., Industrial Requirements • EN 61000-6-2; Industrial Immunity • EN 61000-6-4; Industrial Emissions • EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> • 2016 No. 1091, Electromagnetic Compatibility Regulations • 2016 No. 1101, Electrical Equipment (Safety) Regulations • 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations • 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> • Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension • Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |

(1) See the Product Certification (when product is marked) link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-OV16E

ControlLogix DC (10...30V) electronically fused, sinking output module

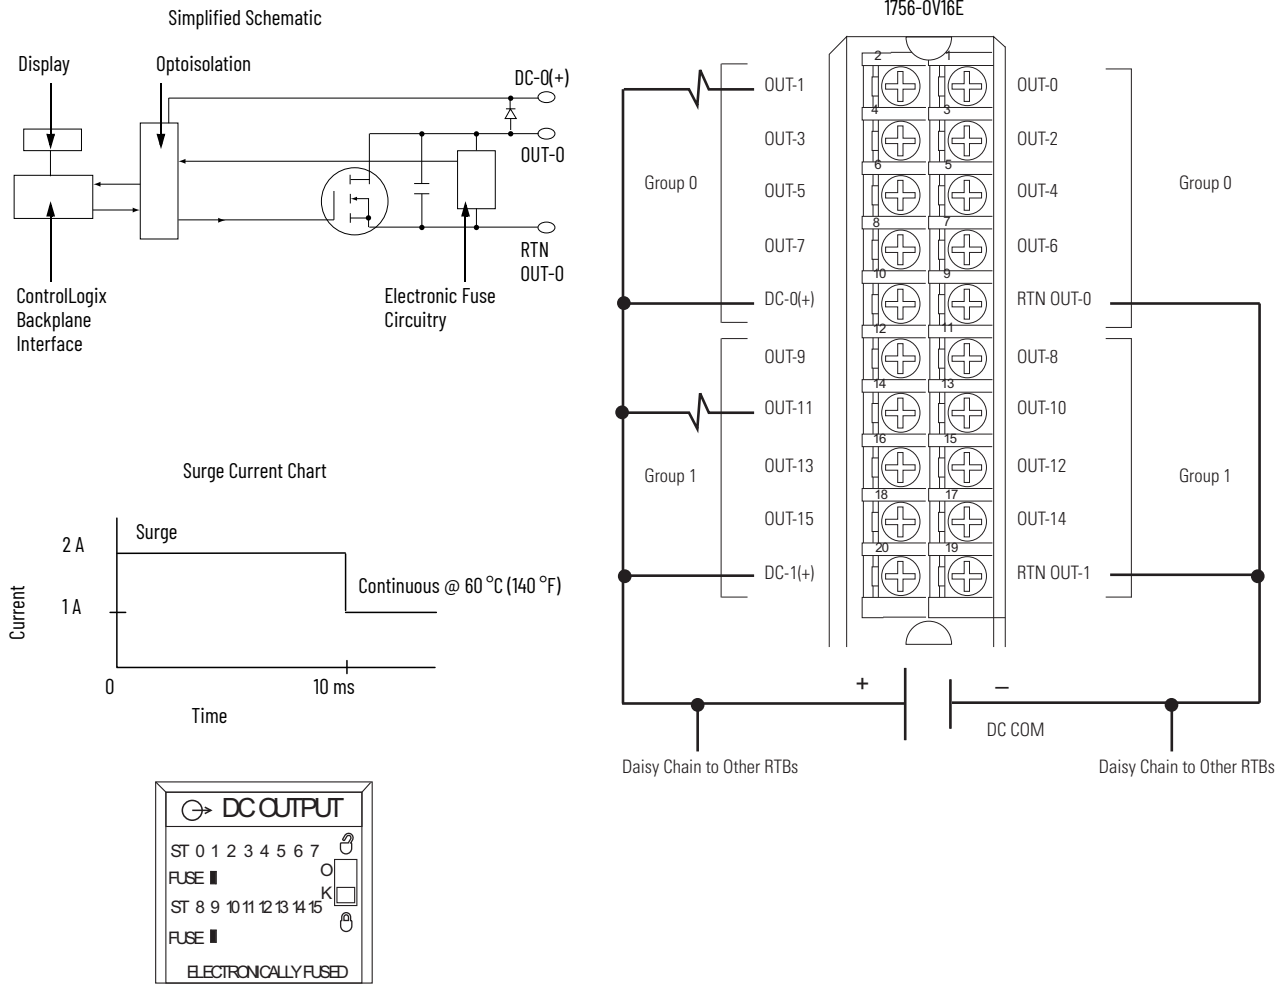

Diagnostic Specifications

| Attribute | 1756-OV16E |
|---------------------------|---|
| Short trip | 5 A for 20 ms @ 24V DC (output on, then short) 5 A for 20 ms @ 24V DC (output on into short) |
| Time stamp of diagnostics | ±1 ms |

Technical Specifications

| Attribute | 1756-0V16E |
|---|--|
| Outputs | 16 electronically fused (8 points/group) |
| Pilot duty | 1 A (DC-13/SR) |
| Voltage category | 12/24V DC sink |
| Output delay time Off to On On to Off | 75 μ s nom/1 ms max 360 μ s nom/1 ms max |
| Operating voltage range | 10...30V DC |
| Current draw @ 5.1V | 210 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 1.12 W |
| Power dissipation, max | 6.72 W @ 60 °C (140 °F) |
| Thermal dissipation | 22.94 BTU/hr |
| Off-state leakage current per point, max | 1 mA per point |
| On-state voltage drop, max | 700 mV DC @ 1 A |
| Current per point, max | 1 A @ 60 °C (140 °F) |
| Current per module, max | 8 A @ 60 °C (140 °F) |
| Surge current per point | 2 A for 10 ms per Point, repeatable every 2 s @ 60 °C (140 °F) |
| Load current, min | 2 mA per point |
| Scheduled outputs | Synchronization within 16.7 s max, reference to the Coordinated System Time |
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| States in Program mode per point | Hold last state, On or Off (Off is default) |
| Isolation voltage | 250V (continuous), basic insulation type, outputs-to-backplane, and output group-to-group No isolation between individual group outputs |
| Module keying | Electronic, software configurable |
| Fusing | Electronically fused per group |
| Removable terminal block | 1756-TBNH 1756-TBSH |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽¹⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-0V16E |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |





Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-0V16E |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-0V32E

ControlLogix DC (10...30V) electronically fused, sinking output module

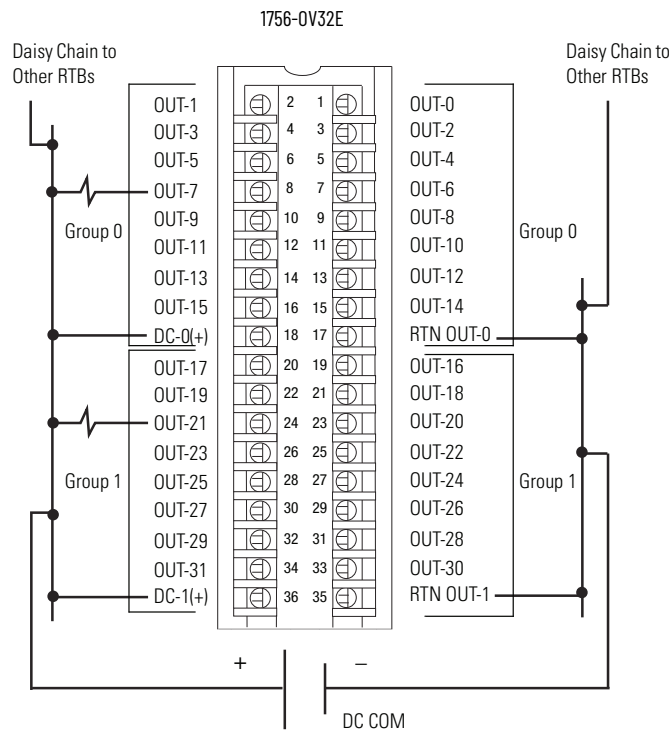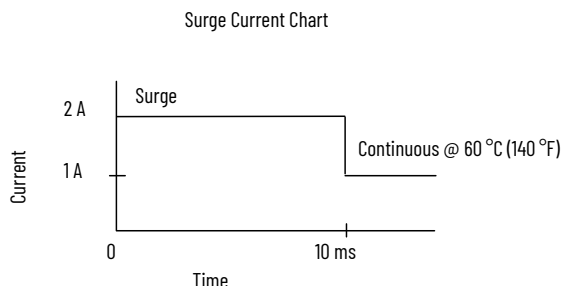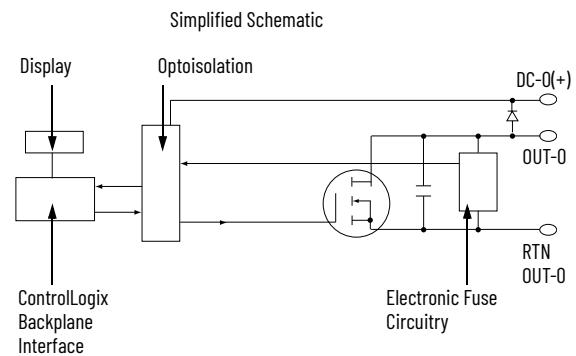

Diagnostic Specifications

| Attribute | 1756-0V32E |
|---------------------------|---|
| Short trip | 5 A for 20 ms @ 24V DC (output on then short) 5 A for 20 ms @ 24V DC (output into short) |
| Time stamp of diagnostics | ±1 ms |

Technical Specifications

| Attribute | 1756-0V32E |
|---|---|
| Outputs | 32 electronically fused (16 points/group) |
| Voltage category | 12/24V DC sink |
| Operating voltage range | 10...30V DC |
| Output delay time (24V to 0V DC transition) | |
| Off to On | 75 µs nom/300 µs max |
| On to Off | 230 µs nom/1 ms max |
| Current draw @ 5.1V | 390 mA |
| Current draw @ 24V | 2 mA |
| Total backplane power | 2.04 W |
| Power dissipation, max | 5.88 W @ 60 °C (140 °F) |
| Thermal dissipation | 20.1 BTU/hr |
| Off-state leakage current per point, max | 1 mA per point |

Technical Specifications (Continued)

| Attribute | 1756-0V32E |
|----------------------------------|--|
| On-state voltage drop, max | 350 mV DC @ 0.5 A |
| Current per point, max | 0.5 A @ 50 °C (122 °F) linear derating 0.35 A @ 60 °C (140 °F) |
| Current per group, max | 8 A @ 50 °C (122 °F) linear derating 5 A @ 60 °C (140 °F) |
| Current per module, max | 16 A @ 50 °C (122 °F) linear derating 10 A @ 60 °C (140 °F) |
| Surge current per point | 2 A for 10 ms per point, repeatable every 2 s @ 60 °C (140 °F) |
| Load current, min | 2 mA per output |
| Scheduled outputs | Synchronization within 16.7 s max, reference to the Coordinated System Time |
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| States in Program mode per point | Hold last state, On or Off (Off is default) |
| Isolation voltage | 250V (continuous), basic insulation type, outputs-to-backplane, and output group-to-group No isolation between individual group outputs |
| Module keying | Electronic, software configurable |
| Fusing | Electronically fused per group |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽¹⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-0V32E |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |

Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-0V32E |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1 er muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 2020122309111830, 2020122309111998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.


1756-IB16S, 1756-IB16SK

ControlLogix® DC (18...32V) sinking safety input module.

You must connect a 24V DC SELV/PELV power source to the DC+/- terminals to provide field-side power.

- IMPORTANT**
- The 24V (DC+ and DC-) power connections are used to supply field-side power to the module.
 - All terminals with the same name are connected together on the module. For example, DC+ can be connected to either terminal marked DC +.
 - Do not physically connect more than two wires to a single RTB terminal.
 - All other I/O modules in the same chassis must use an SELV/PELV power supply.
 - The 1756-IB16S and 1756-IB16SK modules are compatible with a Series **C** ControlLogix chassis. Do not install the 1756-IB16S or 1756-IB16SK module in a Series **B** ControlLogix chassis.


1756-IB16S, 1756-IB16SK Simplified Schematic

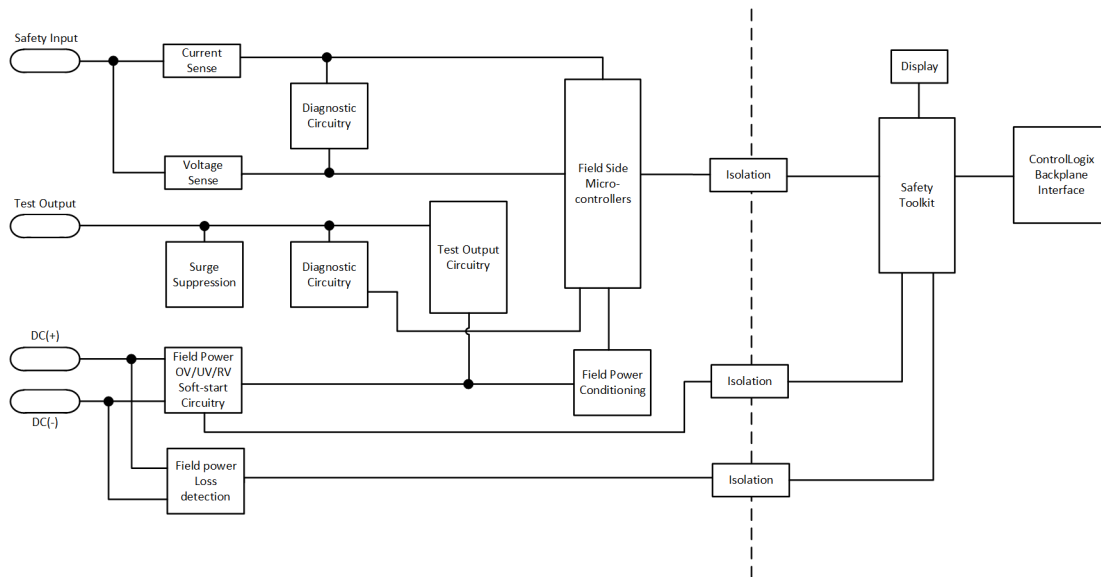

When the module is wired as shown, it is suitable for applications that are rated up to, and including, **Category 2** and **PLd** as defined in ISO 13849-1. To achieve that suitability rating, you may have to perform diagnostic testing of the safety function.

One diagnostic test method is to configure the safety input channel for Safety Pulse Test to test the circuit for short circuits to 24V DC.

Channel Connections
 The diagram shows devices that are connected to safety input channel 0 and test output channel 0. You can connect devices to all 16 channels.

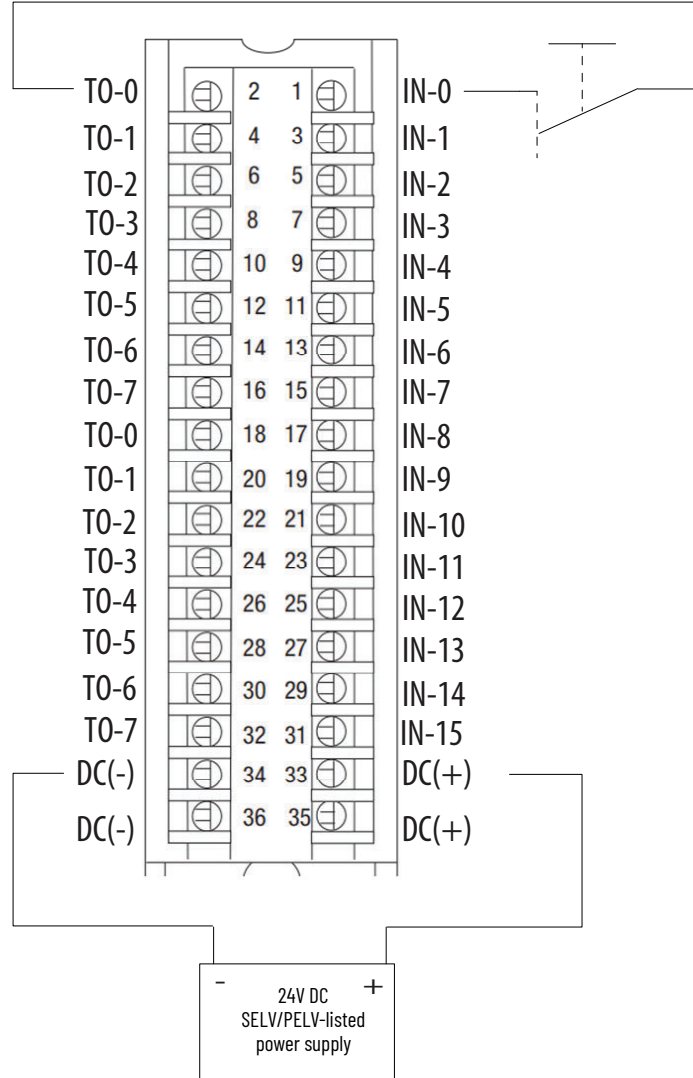


When the module is wired as shown, it is suitable for applications that are rated up to, and including, **Category 3** and **PLd** as defined in ISO 13849-1.

IMPORTANT

Switches are suitable for applications that are rated up to, and including SIL 3 CL3, PLd, Cat 3.

Channel Connections

This diagram shows devices that are connected to safety input channels 0 and 1. You can connect devices to all 16 channels.

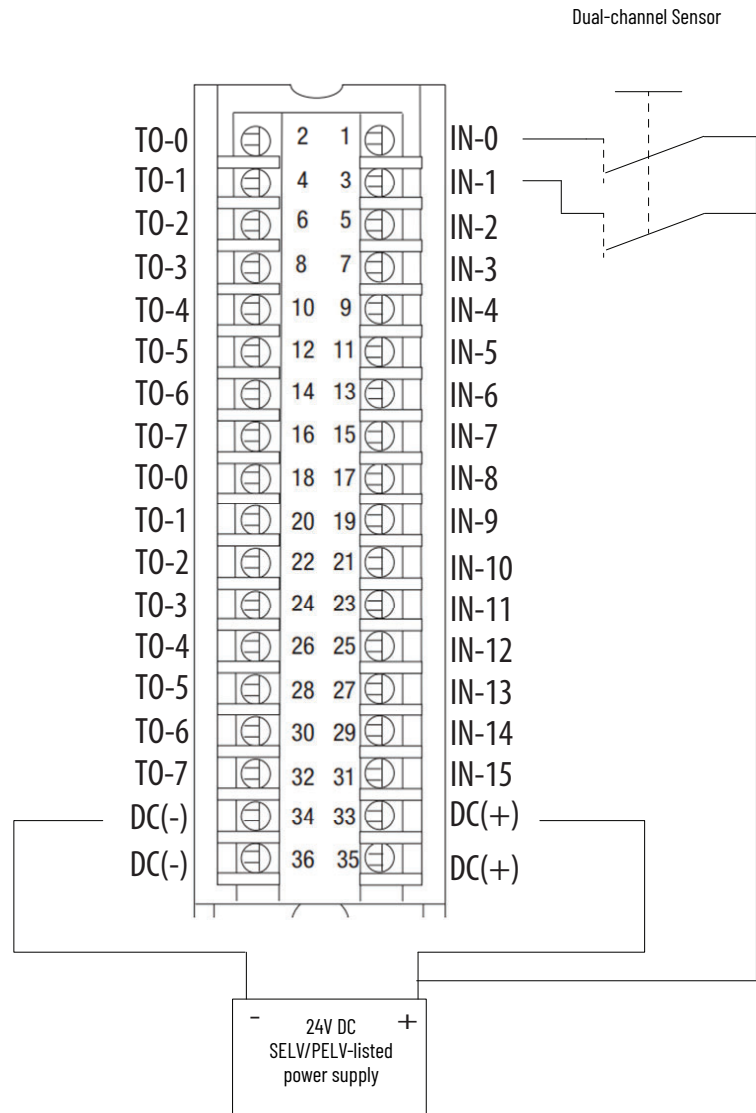

When the module is wired as shown, it is suitable for applications that are rated up to, and including, **Category 4** and **PLe** as defined in ISO 13849-1. To achieve that suitability rating, you may have to perform diagnostic testing of the safety function.


One diagnostic test method is to configure the safety input channel for Safety Pulse Test to test the circuit for short circuits to 24V DC. Safety input pairs must be associated with different Test Output sources.

Channel Connections

This diagram shows devices that are connected to safety input channels 0 and 1; and to test outputs 0 and 1.

You can connect devices to all 16 channels.

Because of the pre-configured relationships between test outputs and input channels, wiring a dual channel device to input channels 0 and 8 is not supported if pulse testing is required, the same holds true for 1/9, 2/10, 3/11, 4/12, 5/13, 6/14, 7/15.

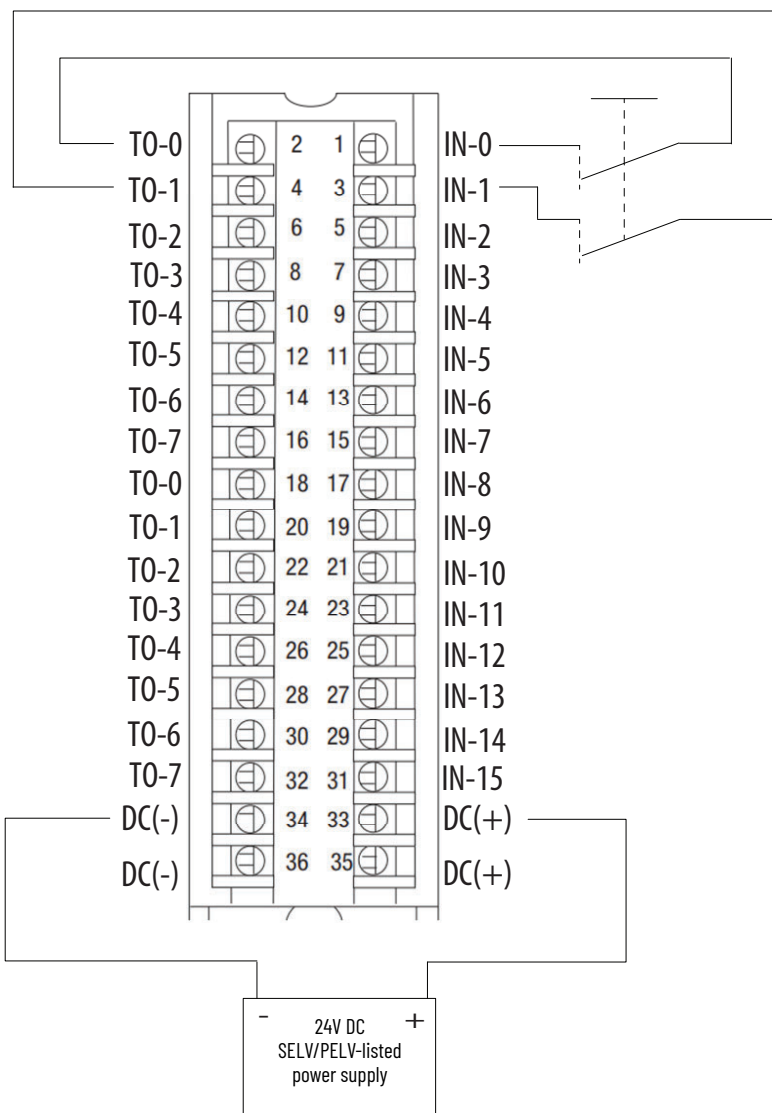

Technical Specifications

| Attribute | 1756-IB16S, 1756-IB16SK |
|--|--|
| On-state voltage range | 10...32V DC |
| On-state current, @ on-state min voltage | 2.4 mA @ 10V |
| On-state current, @ on-state nom voltage | 2.5 mA @ 24V |
| On-state current, @ on-state max voltage | 2.8 mA @ 32V |
| Off-state voltage, max | 5V DC |
| Off-state current, max | 1.5 mA |
| Input delay time (screw to backplane), max Off to On On to Off | 6 ms @ RPI of 2 ms |
| Safety Integrity Level | Up to and including Cat. 4 / Ple acc. to EN ISO 13849-1, SIL CL 3 acc. to IEC 62061, SIL 3 acc. to IEC 61508. ⁽¹⁾ |
| Safety Reaction Time (SRT) | 6 ms @ RPI of 2 ms |
| Test output current per point | 0.2 A |
| Number of test outputs | 8 |
| Test output pulse width, max | 600 µs |

Technical Specifications (Continued)

| Attribute | 1756-IB16S, 1756-IB16SK |
|--|-------------------------|
| Test output pulse period, typical | 100 ms |
| Test output max field capacitance | 100 nF |
| Test output short circuit protection | Yes |
| Test output leakage current, max | 0.5 mA |
| Module over-temperature detection | Yes |
| DC supply reverse voltage protection | Yes |
| DC supply overvoltage protection, max | 60V |
| Input delay time Off to On, user-selectable filter time On to Off, user-selectable filter time | 0...50 ms 0...50 ms |
| Timestamp of inputs | No |
| CIP Sync | Yes |

(1) See the 1756 ControlLogix Digital Safety I/O Modules User Manual, publication [1756-UM013](#), for Safety Application Suitability Levels and Safety Data for Safety I/O Modules.

General Specifications

| Attribute | 1756-IB16S, 1756-IB16SK |
|----------------------------------|--|
| Inputs | 16 channels (1 group of 16), sinking |
| Current draw @ 5.1V | 280 mA |
| Total backplane power | 1.43 W |
| Field Power voltage range | 18...32V DC SELV/PELV |
| Field Power current, max | 1.8 A SELV/PELV |
| Input Power, voltage range | 10...32V |
| Input Power current, max | 2.5 mA SELV/PELV 150VA |
| Test Output Power, voltage range | 18...32V DC |
| Test Output Power current, max | 200 mA |
| Power dissipation, max | 6 W |
| Thermal dissipation, max | 20.47 BTU/hr |
| Isolation voltage | 60V (continuous), basic insulation type, channels-to-backplane No isolation between DC power and channels No isolation between individual ports |
| Module keying | Electronic, software configurable |
| Removable terminal block housing | 1756-TBCHS 1756-TBS6HS |
| RTB keying | User-defined mechanical |
| Wire category ⁽¹⁾ | 2 - on power ports |
| Wire size | 1756-TBCHS Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Use only the same size wires with no intermixing of solid and stranded wire types. 1756-TBS6HS Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. |

General Specifications (Continued)

| Attribute | 1756-IB16S, 1756-IB16SK |
|-----------------------------|--------------------------------|
| Terminal block torque specs | 1756-TBCHS 0.5 N•m (4.4 lb-in) |
| Enclosure type | None (open-style) |
| Temperature code | T4 |

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).
Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

Environmental Specifications

| Attribute | 1756-IB16S, 1756-IB16SK |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0 °C ≤ Ta ≤ 60 °C (32 °F ≤ Ta ≤ 140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...6000 MHz |
| EFT/B immunity IEC 61000-4-4 | ±2 kV @ 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |

Certifications

| Certification ⁽¹⁾ | 1756-IB16S, 1756-IB16SK |
|------------------------------|---|
| cULus | UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| RCM | Australian Radiocommunications Act, compliant with: <ul style="list-style-type: none"> EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN/IEC 60079-0; Explosive Atmospheres, General Requirements EN 60079-7; Explosive Atmospheres, Equipment protection by increased safety Ex ec IIC T4 Gc DEMKO 19 ATEX 2189X |
| IECEx | IECEx System, compliant with: <ul style="list-style-type: none"> IEC 60079-0; Explosive Atmospheres, General Requirements IEC 60079-7; Explosive Atmospheres, Equipment protection by increased safety Ex ec IIC T4 Gc IECEx UL 19.0021X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2603X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| TÜV | TÜV Certified for Functional Safety, ⁽²⁾ Capable of Cat. 4/PL e according to EN ISO 13849-1 and SIL 3 according to EN 62061/IEC 61508 when used as described in the GuardLogix® 5580 and Compact GuardLogix 5380 Controller Systems Safety Reference Manual, publication 1756-RM012 |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: <ul style="list-style-type: none"> Article 58-2 of Radio Waves Act, Clause 3 |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

(2) When used with specified firmware revisions.

1756-OBV8S, 1756-OBV8SK


ControlLogix DC (18...32V) safety bipolar/sourcing output module

You can use the 1756-OBV8S module in Bipolar mode or Sourcing mode.

- IMPORTANT**
- The 24V (DC+ and DC-) power connections are used to supply field-side power to the module.
 - All terminals with the same name are connected together on the module. For example, DC+ can be connected to either terminal marked DC +.
 - Do not physically connect more than two wires to one RTB terminal.
 - All other I/O modules in the same chassis must use an SELV/PELV power supply.
 - The 1756-OBV8S and 1756-OBV8SK modules are compatible with a Series C ControlLogix Chassis. Do not install the 1756-OBV8S or 1756-OBV8SK module in a Series B ControlLogix Chassis.
 - Due to the higher internal power dissipation of the 1756-OBV8S module, do not install the 1756-OBV8S module next to any controller or communication module.

1756-OBV8S Simplified Schematic

This schematic represents EVEN channels. ODD channels would reverse which micro controller controls P and M.

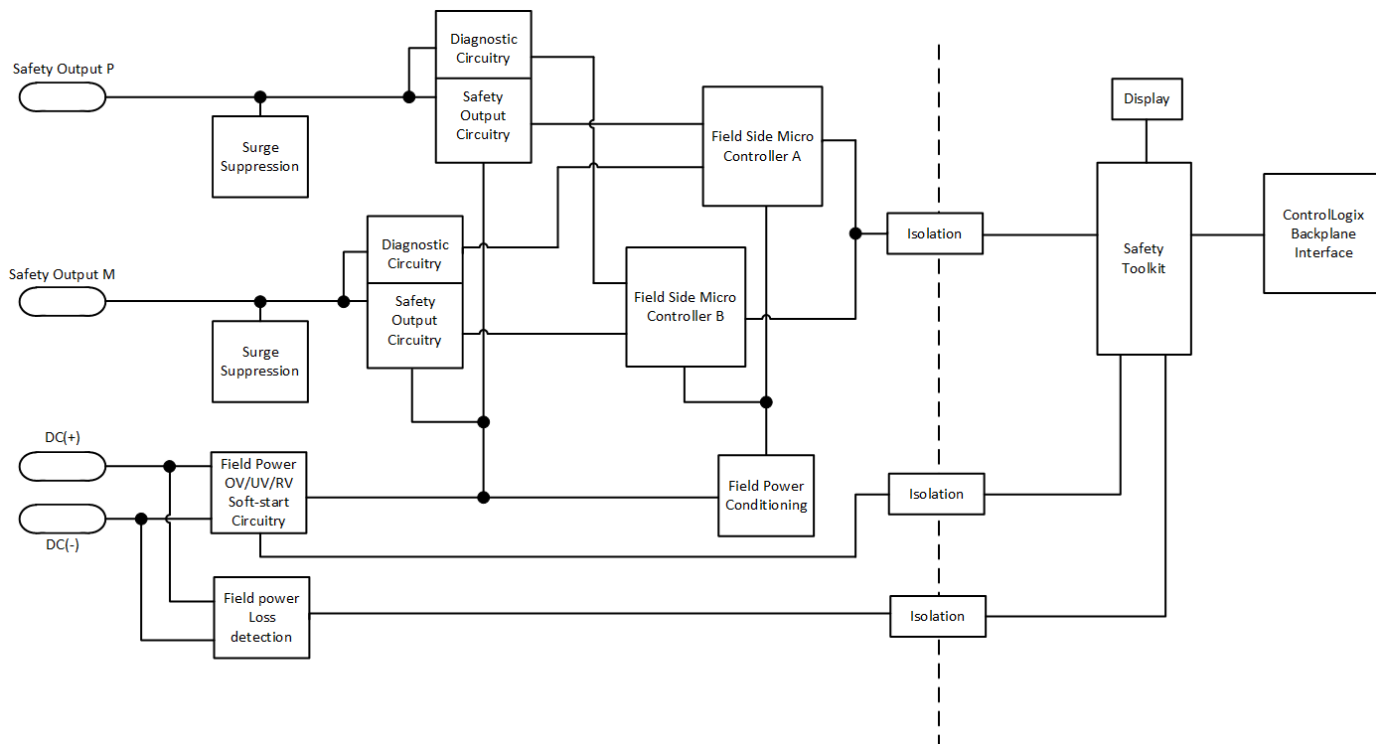

Bipolar Mode


When the module is wired as shown, it is suitable for applications that are rated up to, and including, **Category 2** and **PLd** as defined in ISO 13849-1.

To achieve that suitability rating, you may have to perform diagnostic testing and monitoring of the safety function. One diagnostic test method is to configure the safety output channel for Safety Pulse Test to test the circuit for short circuits to 24V DC.

Channel Connections

This wiring example shows connections to Safety Output 0. You are not limited to using channel 0 in this mode. You can use all channels as determined by your application.

We **strongly recommend** that, if you have a direct connection between the safety output module and an input module and those modules are powered by separate power supplies, you connect module DC- and actuator DC- together. This practice helps to eliminate grounding float from disrupting diagnostics.

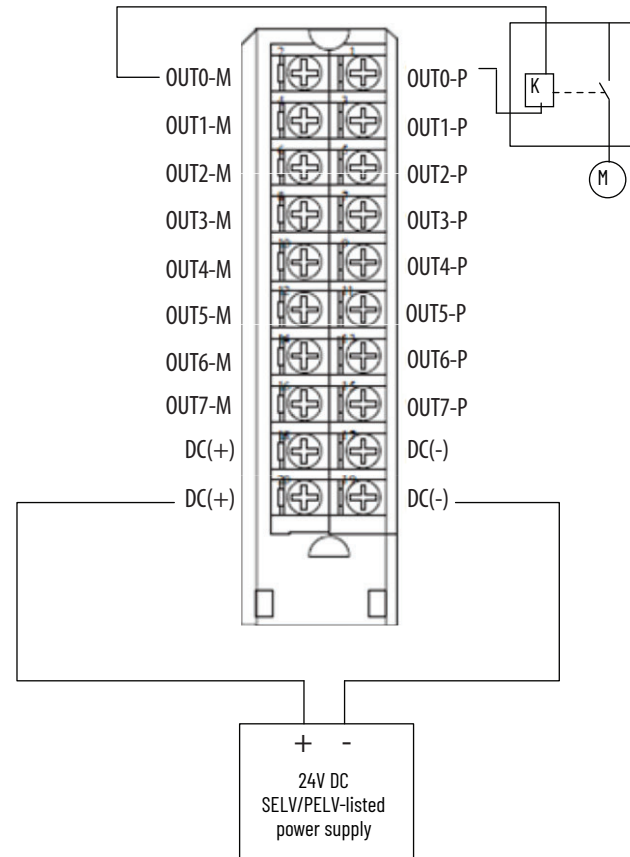

When the module is wired as shown, it is suitable for applications that are rated up to, and including, **Category 4** and **PLe** as defined in ISO 13849-1.

To achieve that suitability rating, you may have to perform diagnostic testing and monitoring of the safety function. One diagnostic test method is to configure the safety output channel for Safety Pulse Test to test the circuit for short circuits to 24V DC.

The application is configured so that a No Load fault can only be detected if the wires from **both** the P- terminal and the M-terminal are disconnected.

For Cat.4 applications, if your application remains in safe state, that is, the output is off, for a prolonged duration, we recommend that you take one of these actions:

- Apply output monitoring at the actuator. The monitoring can be direct or indirect.
- Limit the safe state to no more than 24 hours.
- Conduct functional test if safe state dwell time increases.


Connection Pairs

The terminals for each channel function as a Bipolar connection pair when you use a 1756-OBV8S module in Bipolar switching mode. For example, the Safety Output 0 P (Sourcing) terminal and Safety Output 0 M (Sinking) terminal are a Bipolar connection pair. That is, they are a P-M pair. When the module is in Bipolar switching mode, you must connect the device to both terminals.

Channel Connections

This wiring example shows connections to the P-M pair for Safety Output 0. You are not limited to using channel 0 in this mode. You can use all channel pairs as determined by your application.

We **strongly recommend** that, if you have a direct connection between the safety output module and an input module and those modules are powered by separate power supplies, you connect the DC- terminals together. This practice helps to eliminate grounding float from disrupting diagnostics.

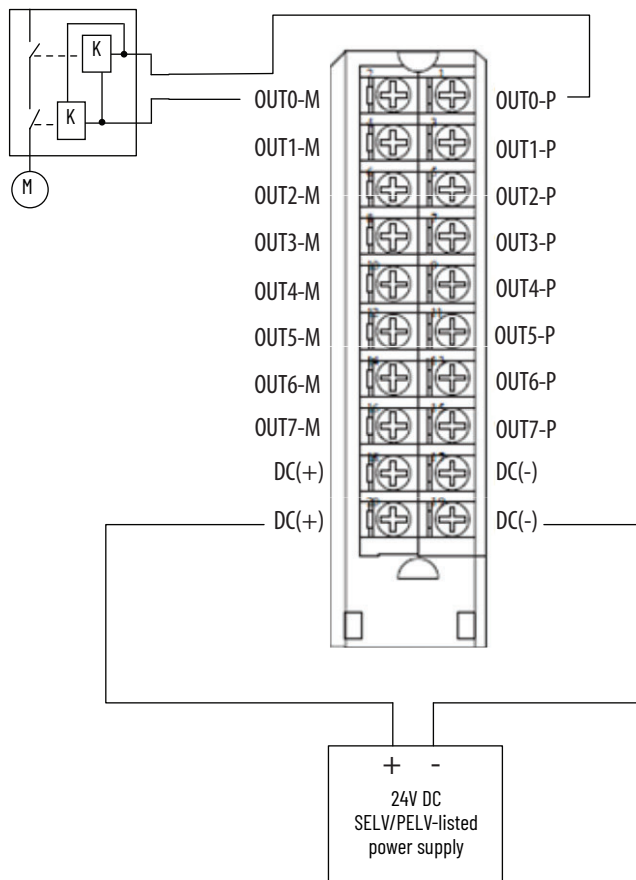

When the module is wired as shown, it is suitable for applications that are rated up to, and including, **Category 4** and **PLe** as defined in ISO 13849-1.

To achieve that suitability rating, you may have to perform diagnostic testing and monitoring of the safety function. One diagnostic test method is to configure the safety output channel for Safety Pulse Test to test the circuit for short circuits to 24V DC.

- We **strongly recommend** that you connect separate shielded cables to the P terminal and the M terminal to reduce possibility of a short between these terminals. If a short is detected across the P-M pair, the module outputs are turned off, but the actuator that is connected to the output pair remains on.
- No Load and Overload conditions are only detectable at the P terminal.

For Cat.4 applications, if your application remains in safe state, that is, the output is off, for a prolonged duration, we recommend that you take one of these actions:

- Apply output monitoring at the actuator. The monitoring can be direct or indirect.
- Limit the safe state to no more than 24 hours.
- Conduct functional test if safe state dwell time increases.

Actuator DC Power

In this wiring configuration, you must connect the **DC+ terminal to an SELV/PELV-listed** power supply. The DC+ and DC- on the actuator must be connected to the same power supply as the DC+ and DC- on the module.

Connection Pairs

The terminals for each channel function as a Bipolar connection pair when you use a 1756-OBV8S module in Bipolar switching mode. For example, the Safety Output O P (Sourcing) terminal and


Safety Output O M (Sinking) terminal are a Bipolar connection pair. That is, they are a P-M pair.

When the module is in Bipolar switching mode, you must connect the device to both terminals.

Channel Connections

This wiring example shows connections to the P-M pair for Safety Output 0. You are not limited to using channel 0 in this mode. You can use all channel pairs as determined by your application.

We **strongly recommend** that, if you have a direct connection between the safety output module and an input module and those modules are powered by separate power supplies, you connect the DC- terminals together. This practice helps to eliminate grounding float from disrupting diagnostics.

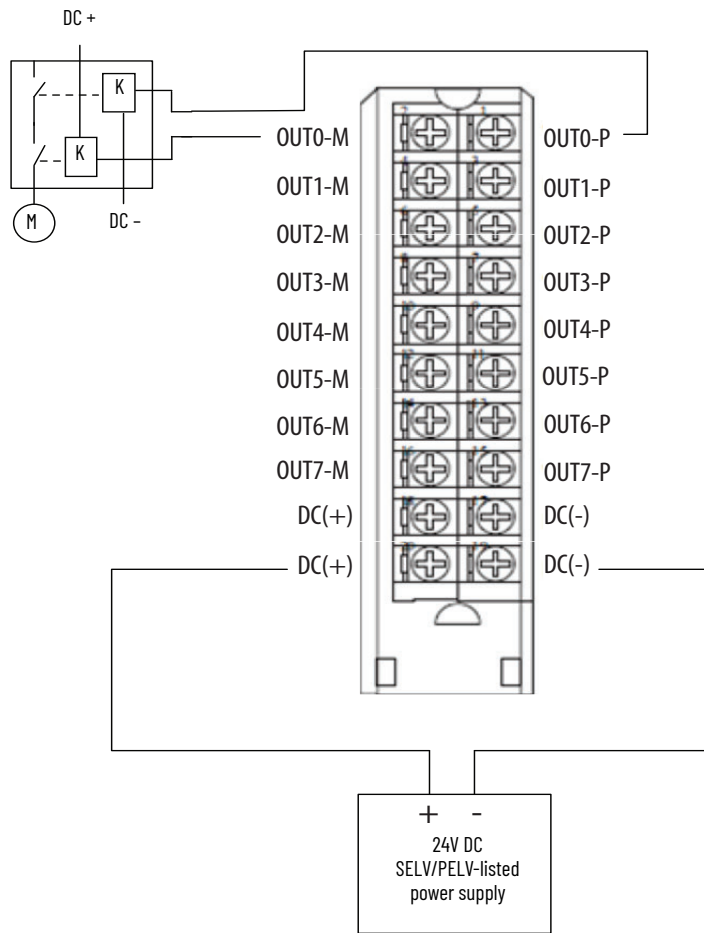

Sourcing Mode


When the module is wired as shown, it is suitable for applications that are rated up to, and including, **Category 2** and **PLd** as defined in ISO 13849-1.

To achieve that suitability rating, you may have to perform diagnostic testing and monitoring of the safety function. One diagnostic test method is to configure the safety output channel for Safety Pulse Test to test the circuit for short circuits to 24V DC.

Channel Connections

This wiring example shows connections to Safety Output 0. You are not limited to using channel 0 in this mode. You can use all channels as determined by your application.

We **strongly recommend** that, if you have a direct connection between the safety output module and an input module and those modules are powered by separate power supplies, you connect module DC- and actuator DC- together. This practice helps to eliminate grounding float from disrupting diagnostics.

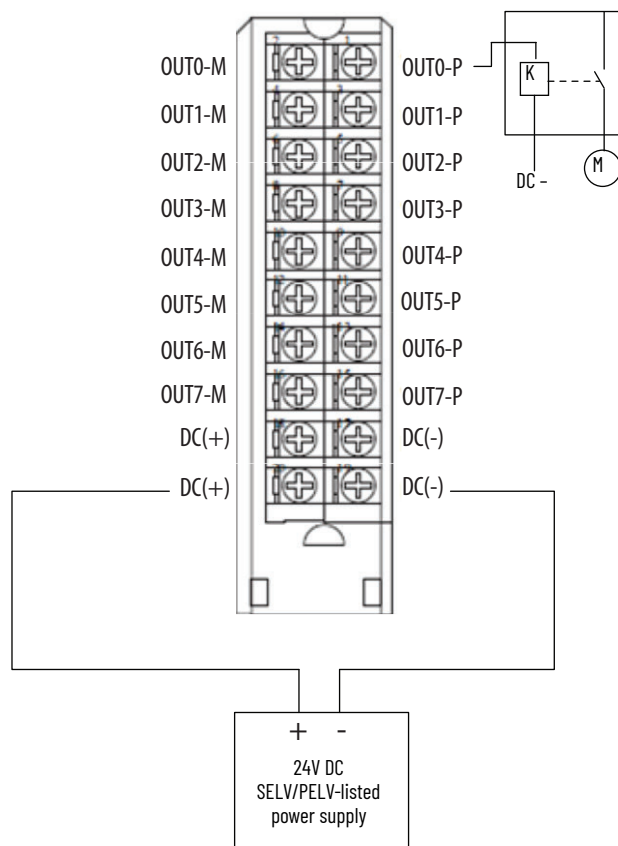

When the module is wired as shown, it is suitable for applications that are rated up to, and including, **Category 4** and **PLe** as defined in ISO 13849-1.

To achieve that suitability rating, you may have to perform diagnostic testing and monitoring of the safety function. One diagnostic test method is to configure the safety output channel for Safety Pulse Test to test the circuit for short circuits to 24V DC.

For Cat.4 applications, if your application remains in safe state, that is, the output is off, for a prolonged duration, we recommend that you take one of these actions:

- Apply output monitoring at the actuator. The monitoring can be direct or indirect.
- Limit the safe state to no more than 24 hours.
- Conduct functional test if safe state dwell time increases.

Connection Pairs


When you use dual-channel sourcing wiring on the 1756-OBV8S module, you must connect the devices to dual-channel connection pairs. For example, the devices are connected to channels 4 and 5 because they are a connection pair. These channels are dual-channel connection pairs:

- Channels 0 and 1 (shown)
- Channels 2 and 3
- Channels 4 and 5
- Channels 6 and 7

Channel Connections

This wiring example shows connections to Safety Output 0 P and Safety Output 1P. You are not limited to using channels 0 and 1 in this mode. You can use all channel pairs as determined by your application.

We **strongly recommend** that, if you have a direct connection between the safety output module and an input module and those modules are powered by separate power supplies, you connect module DC- and actuator DC- together. This practice helps to eliminate grounding float from disrupting diagnostics.

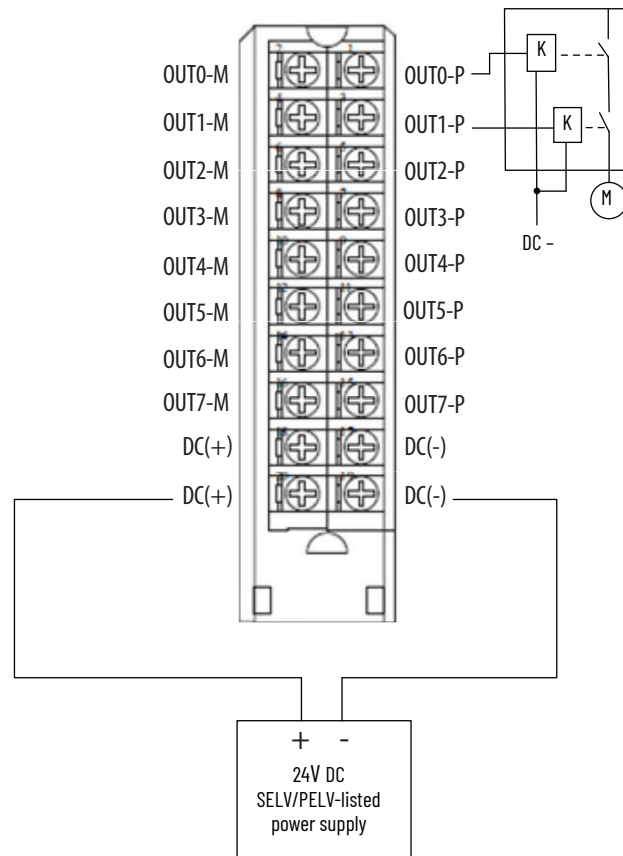

Technical Specifications

| Attribute | 1756-OBV8S |
|---|--|
| On-state voltage, min ⁽¹⁾ | 17.5V DC |
| On-state voltage, nom ⁽¹⁾ | 24V DC |
| On-state voltage, max ⁽¹⁾ | 32V DC |
| On-state voltage drop, max ⁽¹⁾ | 0.5V DC |
| On-state current per channel, max ⁽¹⁾ | 1 A |
| Off-state voltage, max ⁽¹⁾ | 0.5V DC |
| Off-state leakage current per point, max ⁽²⁾ | 1.5 mA |
| Output current rating per channel | 1 A |
| Surge current per point, max | 1.5 A |
| Output delay time (backplane to screw) | |
| Off to On | 4 ms, max |
| On to Off | 4 ms, max |
| Safety Integrity Level | Up to and including Cat. 4 / PLe acc. to EN ISO 13849-1, SIL CL 3 acc. to IEC 62061, SIL 3 acc. to IEC 61508. ⁽³⁾ |
| Safety reaction time (SRT) | 4.5 ms |
| Pulse width, max | 750 μs |
| Field power loss detection | Yes (per point) |
| No load detection diagnostics | Yes (per point) |
| Output short circuit/overload detection | Yes (per point) |
| Output short circuit/overload protection | Yes (per point) |

Technical Specifications (Continued)

| Attribute | 1756-OBV8S |
|---|---------------------|
| Output overtemperature detection | Yes (per point) |
| Output overtemperature protection | Yes (per point) |
| Reverse voltage protection | Yes |
| Overvoltage protection, max | Yes |
| CIP Sync | Yes |
| Output control in fault mode per point | Yes |
| Output states in program mode per point | Off (default), Hold |
| Output states in fault mode per point | Off (default), Hold |

- (1) Field Power related attributes.
- (2) Recommended Loading Resistor - To limit the effects of leakage current through solid-state outputs, you can connect a loading resistor in parallel with your load. For 24V DC operation, use a 5.6 KΩ, 0.5 W resistor for transistor operation.
- (3) See the 1756 ControlLogix Digital Safety I/O Modules User Manual, publication [1756-UM013](#), for Safety Application Suitability Levels and Safety Data for Safety I/O Modules.

General Specifications

| Attribute | 1756-OBV8S |
|----------------------------------|---|
| Outputs | 8 |
| Voltage category | 24V DC |
| Current draw @ 5.1V | 280 mA |
| Total backplane power | 1.43 W |
| Field Power voltage range | 18...32V DC SELV/PELV |
| Field Power current, max | 8.1 A SELV/PELV |
| Output Power voltage range | 18...32V |
| Output Power current, max | 1 A SELV/PELV 150VA |
| Field Power | 1 A per channel @ 18...32V DC 8.1 A per module @ 18...32V DC |
| Pilot Duty | 2.4 A inrush |
| Power dissipation, max | 8 W |
| Thermal dissipation, max | 27.28 BTU/hr |
| Isolation voltage | 60V (continuous), basic insulation type, channels-to-backplane No isolation between DC power and channels No isolation between individual ports |
| Module keying | Electronic keying via programming software |
| Removable terminal block housing | 1756-TBNHS 1756-TBSHS |
| RTB keying | User-defined mechanical |
| Wire category ⁽¹⁾ | 2 - power ports |
| Wire size | 1756-TBNHS Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Use only the same size wires with no intermixing of solid and stranded wire types. 1756-TBSHS Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. |

General Specifications (Continued)

| Attribute | 1756-OBV8S |
|-----------------------------|--------------------------------|
| Terminal block torque specs | 1756-TBNHS 1.36 N•m (12 lb-in) |
| Enclosure type rating | None (open-style) |
| Temperature code | T4 |

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-OBV8S |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ab, Operating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Operating Thermal Shock) | 0 °C < Ta < +60 °C (+32 °F < Ta < +140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz 3V/m with 1 kHz sine wave 80% AM from 2700...6000 MHz |
| EFT/B immunity IEC 61000-4-4 | ±2 kV @ 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |

Certifications


| Certification ⁽¹⁾ | 1756-OBV8S |
|------------------------------|---|
| cULus | UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) |
| RCM | Australian Radiocommunications Act, compliant with: <ul style="list-style-type: none"> EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN/IEC 60079-0; Explosive Atmospheres, General Requirements EN 60079-7; Explosive Atmospheres, Equipment protection by increased safety Ex ec IIC T4 Gc DEMKO 19 ATEX 2189X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0; Explosive Atmospheres, General Requirements IEC 60079-7; Explosive Atmospheres, Equipment protection by increased safety Ex ec IIC T4 Gc IECEX UL 19.0021X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2603X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| TÜV | TÜV Certified for Functional Safety; ⁽²⁾ Capable of Cat. 4/PL e according to EN ISO 13849-1 and SIL 3 according to EN 62061/IEC 61508 when used as described in the GuardLogix 5580 and Compact GuardLogix 5380 Controller Systems Safety Reference Manual, publication 1756-RM012 |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: <ul style="list-style-type: none"> Article 58-2 of Radio Waves Act, Clause 3 |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 2020122309111830, 2020122309111998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

(2) When used with specified firmware revisions.

1756-OX8I

ControlLogix® AC (10...240V) DC (5...125V) isolated contact module

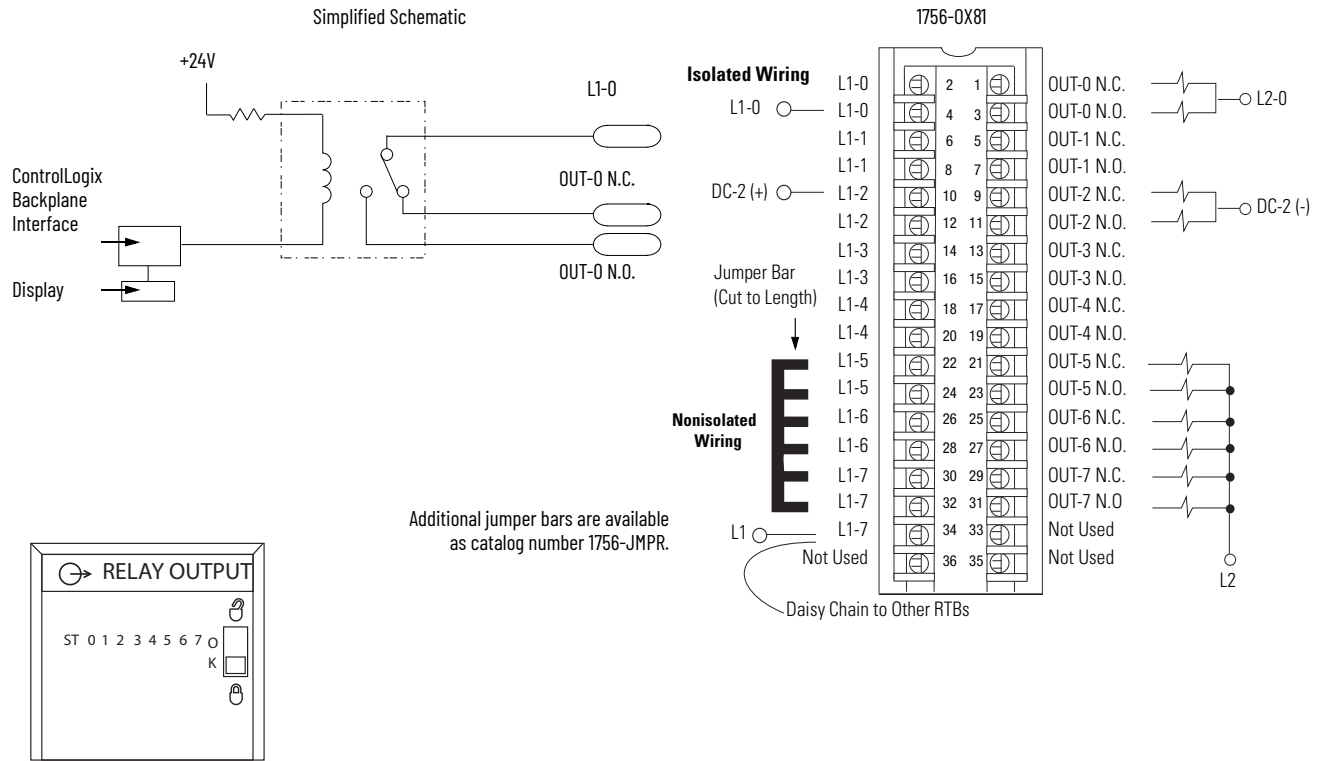

Technical Specifications

| Attribute | 1756-OX8I |
|---|--|
| Outputs | 8 N.O. 8 N.C. individually isolated (two points per group) |
| Pilot duty | C300/R150 |
| Operating voltage range | 5...125V DC 10...240V AC |
| Contact current rating | 1 A @ 5...30V DC 0.5 A @ 48V DC 0.22 A @ 125V DC 1.5 A @ 120V AC 50/60 Hz 0.75 A @ 240VAC 50/60 Hz |
| Output delay time Off to On On to Off | 13 ms max 13 ms max |
| Current draw @ 5.1V | 100 mA |
| Current draw @ 24V | 100 mA |
| Total backplane power | 2.9 W |
| Power dissipation, max | 3.1 W @ 60 °C (140 °F) |
| Thermal dissipation | 10.57 BTU/hr |
| Off-state leakage current per point, max | 0 mA |
| Minimum load current | 10 mA per point |
| Initial contact resistance, max | 100 mΩ @ 6V 1 A |
| Switching frequency, max | 1 operation/3 s (0.3 Hz at rated load) |
| Bounce time, mean | 1.2 ms |

Technical Specifications (Continued)

| Attribute | 1756-0X8I |
|----------------------------------|--|
| Expected contact life | 300,000 cycles resistive 100,000 cycles inductive |
| Scheduled outputs | Synchronization within 16.7 s max, reference to the Coordinated System Time |
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| States in Program mode per point | Hold last state, On or Off (Off is default) |
| Isolation voltage | 250V (continuous), basic insulation type, outputs-to-backplane, and output-to-output |
| Module keying | Electronic, software configurable |
| Fusing | Not protected. A fused IFM is recommended to help protect outputs. |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽¹⁾ |
| Enclosure type | None (open-style) |
| North American temperature code | T4A |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-0X8I |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |
| Oscillatory surge withstand IEEE C37.90.1 | 3 kV |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-0X8I |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> • EN 61326-1; Meas./Control/Lab., Industrial Requirements • EN 61000-6-2; Industrial Immunity • EN 61000-6-4; Industrial Emissions • EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> • 2016 No. 1091, Electromagnetic Compatibility Regulations • 2016 No. 1101, Electrical Equipment (Safety) Regulations • 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations • 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> • Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension • Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-0W16I

ControlLogix AC (10...240V) DC (5...125V) isolated contact module

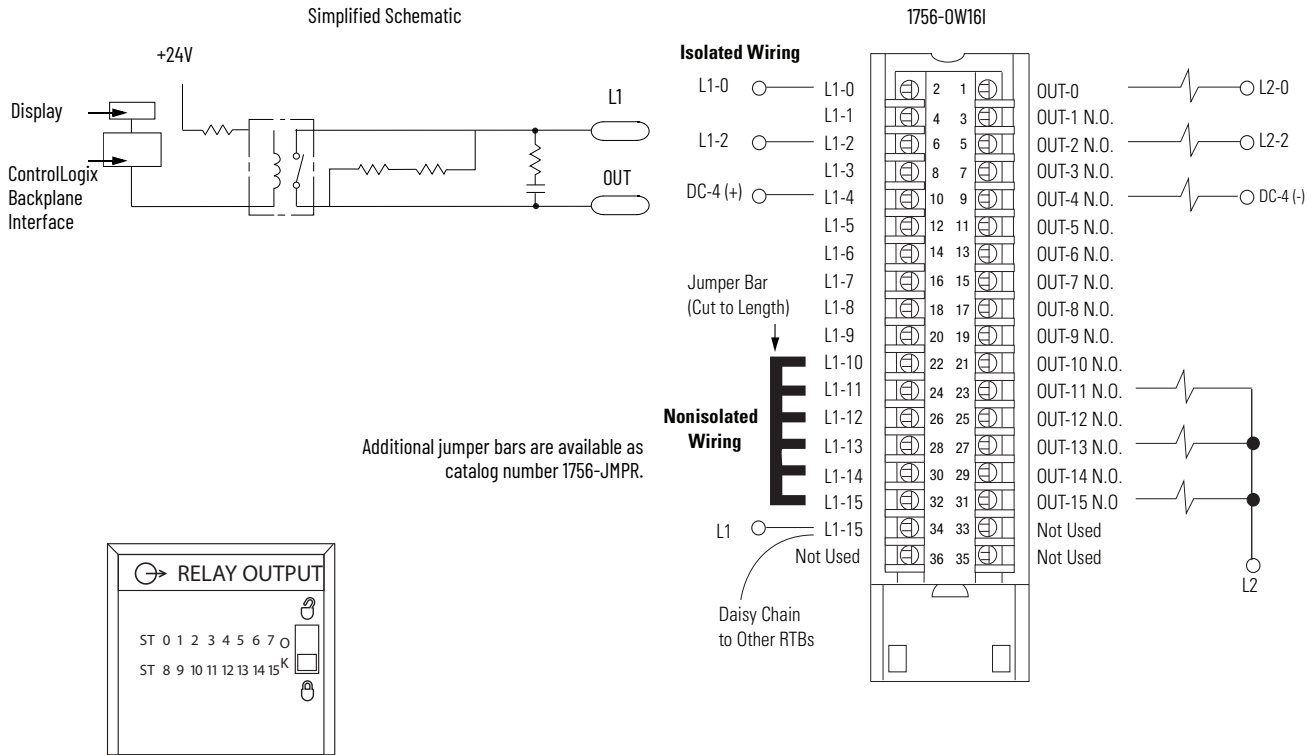

Technical Specifications

| Attribute | 1756-0W16I |
|--|---|
| Outputs | 16 N.O. individually isolated |
| Pilot duty | C300/R150 |
| Operating voltage range | 5...125V DC 10...240V AC |
| Output voltage range (load dependent) | 1 A @ 5...30V DC 0.5 A @ 48V DC 0.22 A @ 125V DC 1.5 A @ 120V AC 50/60 Hz 0.75 A @ 240V AC 50/60 Hz |
| Output delay time | |
| Off to On | 10 ms max |
| On to Off | 10 ms max |
| Current draw @ 5.1V | 150 mA |
| Current draw @ 24V | 150 mA |
| Total backplane power | 4.4 W |
| Power dissipation, max | 4.5 W @ 60 °C (140 °F) |
| Thermal dissipation | 15.35 BTU/hr |
| Off-state leakage current per point, max | 1.5 mA per point |
| Minimum load current | 10 mA per point |
| Initial contact resistance, max | 100 mΩ @ 6V 1 A |
| Switching frequency, max | 1 operation/3 s (0.3 Hz at rated load) |
| Bounce time, mean | 1.2 ms |
| Expected contact life | 300,000 cycles resistive 100,000 cycles inductive |
| Scheduled outputs | Synchronization within 16.7 s max, reference to the Coordinated System Time |
| States in Fault mode per point | Hold last state, On or Off (Off is default) |
| States in Program mode per point | Hold last state, On or Off (Off is default) |

Technical Specifications (Continued)

| Attribute | 1756-0W161 |
|---------------------------------|--|
| Isolation voltage | 250V (continuous), basic insulation type, outputs-to-backplane, and output-to-output |
| Module keying | Electronic, software configurable |
| Fusing | Not protected. A fused IFM can be used to help protect outputs. See publication 1492-TD008 . However, the ControlLogix system has been agency certified using only the ControlLogix RTBs, that is, 1756-TBCH, 1756-TBNH, 1756-TBSH, and 1756-TBS6H. Any application that requires agency certification of the ControlLogix system using other wiring termination methods can require application-specific approval by the certifying agency. |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 ⁽¹⁾ |
| Enclosure type | None (open-style) |
| North American temperature code | T4A |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-0W161 |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |
| Oscillatory surge withstand IEEE C37.90.1 | 3 kV |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-0W16I |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1 er muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |


(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IF4FXOF2F, 1756-IF4FXOF2FK

ControlLogix® high-speed input/output analog module

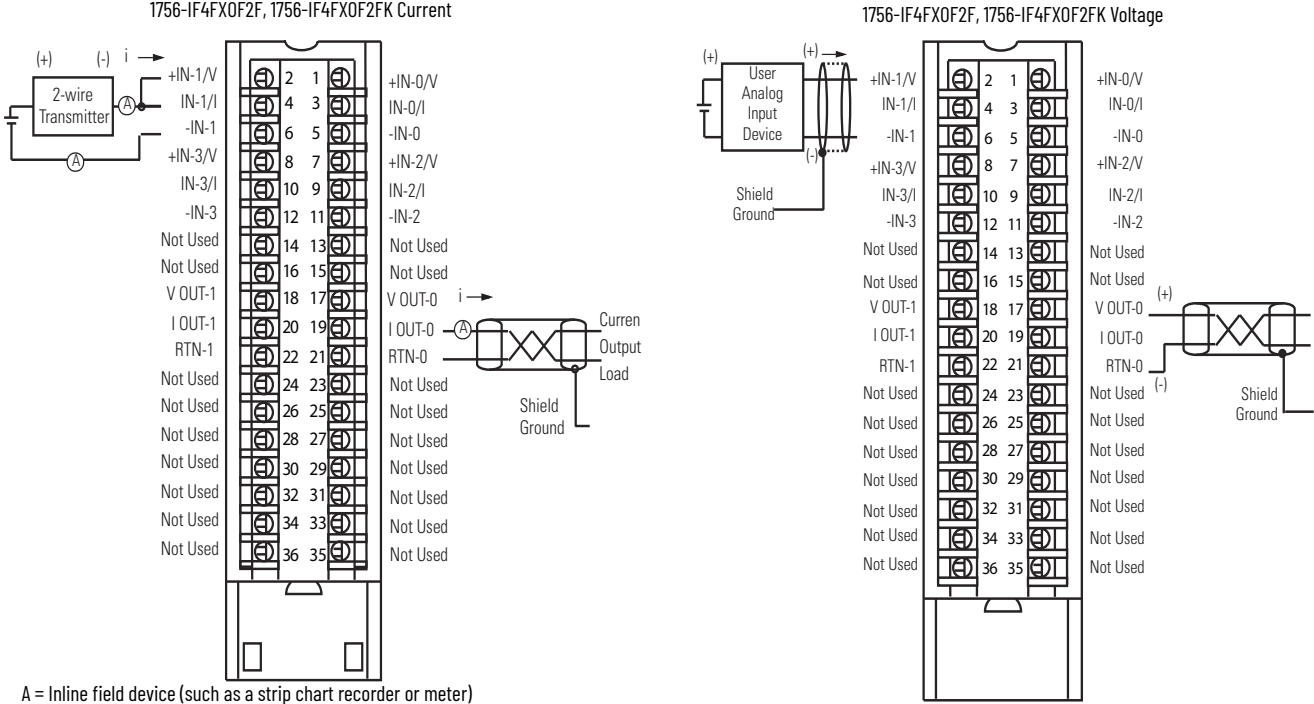

A = Inline field device (such as a strip chart recorder or meter)



Technical Specifications

| Attribute | 1756-IF4FXOF2F, 1756-IF4FXOF2FK |
|-----------------------------|---|
| Current draw at 5.1V | 375 mA |
| Current draw at 24V | 100 mA |
| Voltage and current ratings | Backplane: 375 mA @ 5.1V DC, 100 mA @ 24V DC Analog inputs: -10...+10V, 4...20 mA Analog outputs: -10...+10V, 4...20 mA |
| Power consumption | 4.3 W |
| Power dissipation | Voltage: 4.3 W Current: 4.7 W |
| Thermal dissipation | Voltage: 14.66 BTU/hr Current: 16.02 BTU/hr |
| Data format | IEEE 32-bit floating point |
| Isolation voltage | 250V (continuous) Reinforced insulation type, inputs and outputs to backplane No isolation between individual inputs or outputs |
| Module keying | Electronic, software configurable |

Technical Specifications (Continued)

| Attribute | 1756-IF4FX0F2F, 1756-IF4FX0F2FK |
|--------------------------------|--|
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire size | 1756-TBCH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Use only the same size wires with no intermixing of solid and stranded wire types. 1756-TBS6H Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. |
| Terminal block torque specs | 1756-TBCH: 0.5 Nm (4.4 pound-inches) |
| Wiring category ⁽¹⁾ | 2 - on signal ports |
| Enclosure type | None (open-style) |
| Temperature code | T4 |

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Input Specifications

| Attribute | 1756-IF4FX0F2F, 1756-IF4FX0F2FK |
|-------------------------------------|--|
| Number | 4 high-speed, submillisecond, differential |
| Input range | ±10V 0...10V 0...5V 0...20 mA (Ovrrange indication when exceeded) |
| Resolution | Approx 14 bits across ±10.5V DC (21V total) ±10.5V range: 1.3 mV/bit, 14 bit effective 0...10.5V range: 1.3 mV/bit, 13 bit effective 0...5.25V range: 1.3 mV/bit, 12 bit effective Approx 12 bits across 21 mA 0...21 mA range: 5.25 µA/bit |
| Repeatability | ±1 Least Significant Bit (LSB) ⁽¹⁾ |
| Input impedance | Voltage: >1 MΩ Current: 249 Ω |
| Open circuit detection | Positive full-scale reading within 1 s |
| Ovrrange protection | Voltage: 30V DC Current: 8V AC/DC |
| Calibrated accuracy @ 25 °C (77 °F) | 0.05% of range immediately after calibration Better than 0.1% of range within calibration interval |
| Calibration interval | 12 months |
| Gain drift with temperature | Voltage: 25 ppm/°C max Current: 35 ppm/°C max |
| Module error | 0.2% of range |
| Module scan time | 300 µs min ⁽²⁾ |
| Input conversion method | Successive approximation |

(1) Repeatability is defined as the stability of the input channel reading when a steady state signal is applied, for example, ±1 LSB is one count (1.3 mV) from the nominal reading.

(2) 300 µs min for 1756-IF4FX0F2F/B, firmware revision 3 or greater. 400 µs min for 1756-IF4FX0F2F/A, firmware revision 1.

Output Specifications

| Attribute | 1756-IF4FX0F2F, 1756-IF4FX0F2FK |
|---|---|
| Number | Two high-speed voltage or current |
| Output range | ± 10V 0...20 mA |
| Resolution | 13 bits across 21 mA = 2.8 µA/bit 14 bits across 21.8V = 1.3 mV/bit |
| Open circuit detection | Current output only (Output must be set to >0.1 mA) |
| Overvoltage protection | 24V DC |
| Short circuit protection | Electronically current limited to 21 mA or less |
| Drive capability | Voltage: >2000 Ω Current: 0...750 Ω |
| Output settling time | < 2 ms to 95% of final value with resistive loads |
| Calibrated accuracy @ 25 °C (77 °F) | 0.05% of range immediately after calibration Better than 0.1% of range within calibration interval |
| Calibration interval | 12 months |
| Offset drift | 50 µV/°C 1 µA/°C |
| Gain drift with temperature | Voltage: 25 ppm/°C max Current: 50 ppm/°C max |
| Module error | Voltage: 0.2% of range Current: 0.3% of range |
| Update period for all channels (RPI), min | 1 ms |
| Output conversion method | R-Ladder DAC, monotonicity with no missing codes |

Environmental Specifications

| Attribute | 1756-IF4FX0F2F, 1756-IF4FX0F2FK |
|--|---|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0 °C < Ta < +60 °C (+32 °F < Ta < +140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz 3V/m with 1 kHz sine wave 80% AM from 2700...6000 MHz |
| EFT/B immunity IEC 61000-4-4 | ±2 kV at 5 kHz and 100 kHz on shielded signal ports |
| Surge transient immunity IEC 61000-4-5 | ±2 kV line-earth (CM) on shielded signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IF4FX0F2F, 1756-IF4FX0F2FK |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class 1, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| FM | FM Approved Equipment for use in Class I Division 2 Group A,B,C,D Hazardous Locations |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> IEC 60079-0 Edition 7; General Requirements EN IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 X Gc UL22ATEX2820 |
| IECEx | IECEx System, compliant with: <ul style="list-style-type: none"> IEC 60079-0 Edition 7; General Requirements IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc IECEx UL 22.0039X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2499X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1 er muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 2020122309111830, 2020122309111998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IF8, 1756-IF8K

ControlLogix current/voltage analog input module

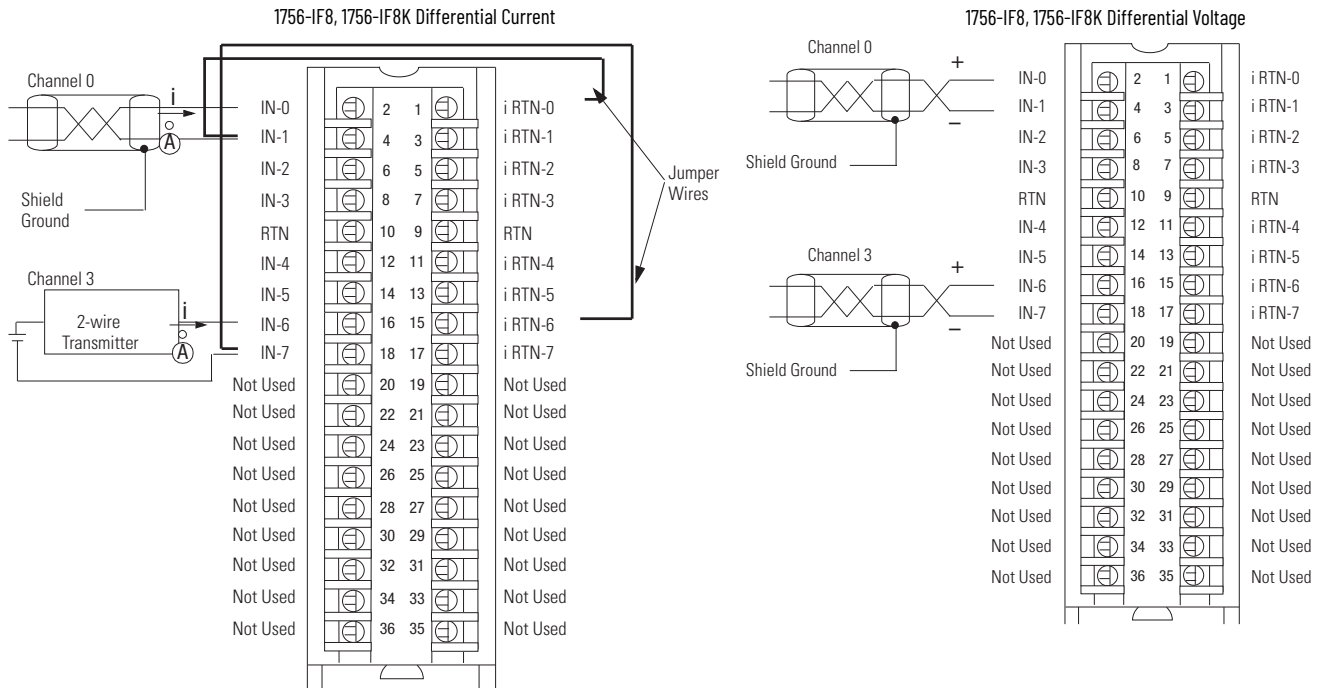

Use this table when wiring your module in Differential Current mode.

| This Channel | Uses these terminals |
|--------------|-----------------------------|
| Channel 0 | IN-0 (+), IN-1 (-), i RTN-0 |
| Channel 1 | IN-2 (+), IN-3 (-), i RTN-2 |
| Channel 2 | IN-4 (+), IN-5 (-), i RTN-4 |
| Channel 3 | IN-6 (+), IN-7 (-), i RTN-6 |

- All terminals marked RTN are connected internally.
- A 249 Ω current loop resistor is located between IN-x and i RTN-x terminals.
- If multiple (+) or multiple (-) terminals are tied together, connect that tie point to an RTN terminal to maintain the module accuracy.
- Place additional loop devices (such as strip chart recorders) at the A location in the current loop.


IMPORTANT: When operating in 2-channel, High-Speed mode, only use channels 0 and 2.

Use this table when wiring your module in Differential Voltage mode.


| This Channel | Uses these terminals |
|--------------|----------------------|
| Channel 0 | IN-0 (+), IN-1 (-) |
| Channel 1 | IN-2 (+), IN-3 (-) |
| Channel 2 | IN-4 (+), IN-5 (-) |
| Channel 3 | IN-6 (+), IN-7 (-) |

- All terminals marked RTN are connected internally.
 - If multiple (+) or multiple (-) terminals are tied together, connect that tie point to an RTN terminal to maintain the module accuracy.
 - Terminals marked RTN or i RTN are not used for differential voltage wiring.
- IMPORTANT:** When operating in 2-channel, High-Speed mode, only use channels 0 and 2.

1756-IF8, 1756-IF8K Single-ended Current

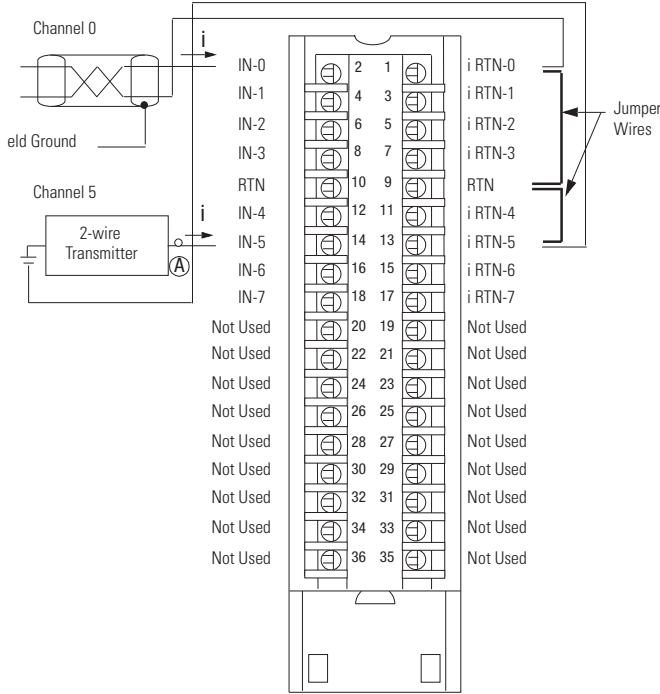


1756-IF8, 1756-IF8K Single-ended Voltage

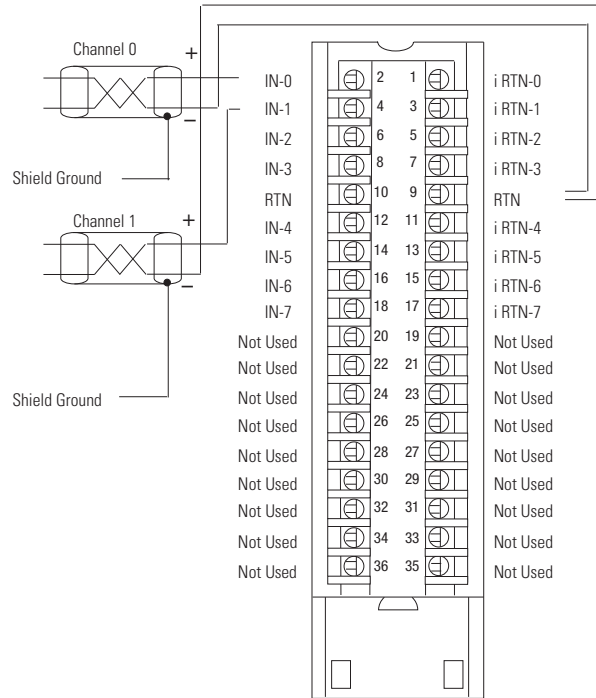


- All terminals marked RTN are connected internally.
- For current applications, all terminals marked i RTN must be wired to terminals marked RTN.
- A 249 Ω current loop resistor is located between IN-x and i RTN-x terminals.
- Place additional loop devices (such as strip chart recorders) at the A location in the current loop.

- All terminals marked RTN are connected internally.
- Terminals marked i RTN are not used for single-ended voltage wiring.

Series A



Series B



Technical Specifications

| Attribute | 1756-IF8/A, 1756-IF8K/A | 1756-IF8/B, 1756-IF8K/B |
|-----------------------|---|-------------------------|
| Inputs | Eight single-ended Four differential Two high-speed differential | |
| Input range | ±10V 0...10V 0...5V 0...20 mA | |
| Resolution | ±10.25V: 320 μV/count (15 bits plus sign bipolar) 0...10.25V: 160 μV/count (16 bits) 0...5.125V: 80 μV/count (16 bits) 0...20.5mA: 0.32 μA/count (16 bits) | |
| Current draw @ 5.1V | 150 mA | 200 mA |
| Current draw @ 24V | 40 mA | 30 mA |
| Total backplane power | 1.73 W | 1.74 W |

Technical Specifications (Continued)

| Attribute | 1756-IF8/A, 1756-IF8K/A | 1756-IF8/B, 1756-IF8K/B |
|--|---|---|
| Voltage and current ratings | Backplane: 5.1V DC, 150 mA max, 24V DC, 40 mA max Input voltage range: -10...+10V Input current range: 4...20mA Limited to 100VA | Backplane: 5.1V DC, 200 mA max, 24V DC, 30 mA max Input voltage range: -10...+10V Input current range: 0...20mA Limited to 100VA |
| Power consumption | 1.73 W | |
| Power dissipation | Voltage: 1.73 W Current: 2.56 W | Voltage: 1.74 W Current: 2.58 W |
| Thermal dissipation | Voltage: 5.89 BTU/hr Current: 8.74 BTU/hr | Voltage: 5.94 BTU/hr Current: 8.79 BTU/hr |
| Input impedance | Voltage: ≥ 10 M Ω Current: 249 Ω | |
| Open circuit detection time | Differential voltage: Positive full-scale reading within 5 s Single-ended/diff. current: Negative full-scale reading within 5 s Single-ended voltage: Even-numbered channels go to positive full scale reading within 5 s, odd-numbered channels go to negative full scale reading within 5 s | |
| Overvoltage protection, max | Voltage: 30V DC Current: 8V DC | |
| Normal mode noise rejection | >80 dB @ 50/60 Hz ⁽¹⁾ | |
| Common mode noise rejection | >100 dB @ 50/60 Hz | |
| Calibrated accuracy 25 °C (77 °F) | Voltage: Better than 0.05% of range Current: Better than 0.15% of range | |
| Offset drift | 45 μ V/°C | |
| Gain drift with temperature | Voltage: 15 ppm/°C Current: 20 ppm/°C | |
| Module error | Voltage: 0.1% of range Current: 0.3% of range | |
| Module input scan time, min ⁽¹⁾ | 8 pt single-ended (floating point): 16...488 ms 4 pt differential (floating point): 8...244 ms 2 pt differential (floating point): 5...122 m | |
| Onboard data alarming | Yes | |
| Scaling to engineering units | Yes | |
| Real-time channel sampling | Yes | |
| Data format | Integer mode (left justified, 2 s complement) IEEE 32-bit floating point | |
| Module conversion method | Sigma-Delta | |
| Isolation voltage | 250V (continuous), Reinforced insulation type, Inputs to Backplane. No isolation between individual Inputs. | 250V (continuous), Basic ⁽²⁾ insulation type, Inputs to Backplane. No isolation between individual Inputs. |
| Module keying | Electronic, software configurable | |
| Removable terminal block | 1756-TBCH 1756-TBS6H | |
| RTB keying | User-defined mechanical | |
| Slot width | 1 | |
| Wire size | 1756-TBCH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire, rated at 105 °C (221 °F) or greater, 1.2 mm (3/64 in.) insulation max. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire, rated at 105 °C (221 °F) or greater, 1.2 mm (3/64 in.) insulation max. 1756-TBS6H Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire, rated at 105 °C (221 °F) or greater, 1.2 mm (3/64 in.) insulation max. | |
| Terminal block torque specs | 1756-TBCH: 0.5 N•m (4.4 lb•in) | |
| Wiring category | 2 - on signal ports ⁽³⁾ | |
| Enclosure type | None (open-style) | |
| Temperature code | T4 | |

(1) Notch filter dependent.

(2) Series A modules were specified to Reinforced Insulation based on UL508 terminology. Series B modules are type-tested to the same Dielectric strength voltage as series A modules but use updated terminology based on IEC 61010-1, Basic Insulation.

(3) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IF8/A, 1756-IF8K/A | 1756-IF8/B, 1756-IF8K/B |
|--|--|-------------------------|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Variation of Temperature) | 0 °C < Ta < +60 °C (+32 °F < Ta < +140 °F) | |
| Temperature, surrounding air, max | 60 °C (140 °F) | |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) | |
| Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Damp Heat) | 5...95% noncondensing | |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz | |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g | |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g | 30 g |
| Emissions | IEC 61000-6-4 | |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges | |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz | |
| EFT/B immunity IEC 61000-4-4 | ±2 kV at 5 kHz on signal ports | |
| Surge transient immunity IEC 61000-4-5 | ±2 kV line-earth (CM) on shielded ports | |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz | |

Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IF8/A, 1756-IF8K/A | 1756-IF8/B, 1756-IF8K/B |
|---|--|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. | |
| FM | FM Approved Equipment for use in Class I Division 2 Group A, B, C, D Hazardous Locations | |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: <ul style="list-style-type: none"> EN 61131-2; Programmable Controllers (Clause 11) | |
| RCM | Australian Radiocommunications Act, compliant with: <ul style="list-style-type: none"> EN 61000-6-4; Industrial Emissions | |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN 60079-0; General Requirements EN 60079-15; Potentially Explosive Atmospheres, Protection "n" II 3 G Ex nA IIC T4 Gc DEMKO15ATEX1482X | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0; General Requirements EN IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc UL 22 ATEX 2772X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0; General Requirements IEC 60079-15; Potentially Explosive Atmospheres, Protection "n" II 3 G Ex nA IIC T4 Gc IECEX UL 15.0053X | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0; General Requirements IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0039X |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: <ul style="list-style-type: none"> Article 58-2 of Radio Waves Act, Clause 3 | |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation | |
| UKex | N/A | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2499X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| UKCA | N/A | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | N/A | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | N/A | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.


1756-IF8I, 1756-IF8IK

ControlLogix isolated voltage/current analog input module

1756-IF8I, 1756-IF8IK Module Wiring Diagram -Current Mode with External Loop Power

IMPORTANT: Remember the following:


- In this wiring diagram, an external, user-provided power supply provides 24V DC loop power.
- If separate power sources are used, do not exceed the specific isolation voltage as listed in the specifications.
- Place additional loop devices, for example, strip chart recorders, at either 'A' location in the current loop.

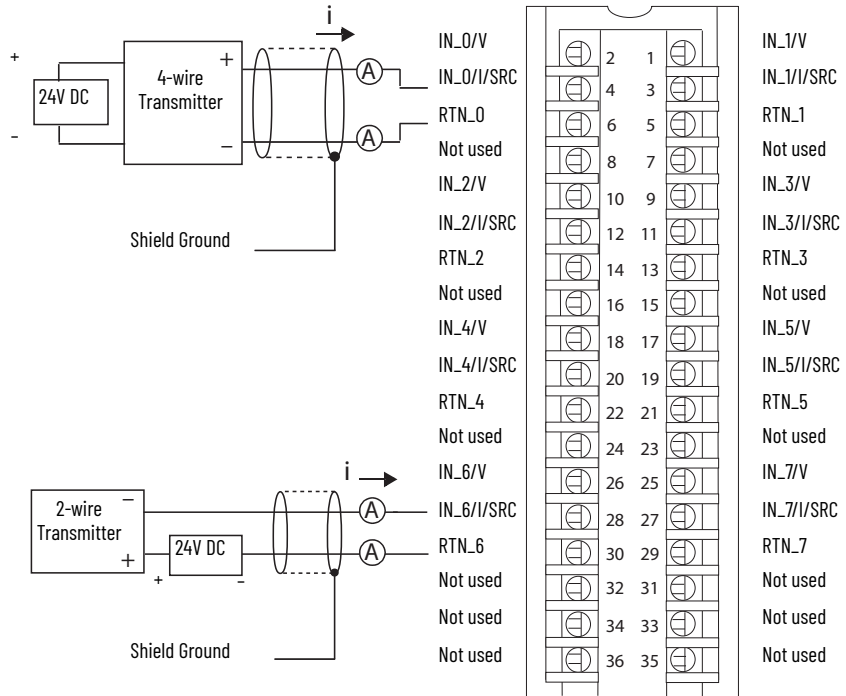

1756-IF8I, 1756-IF8IK Module Wiring Diagram -Current Mode with Internal Loop Power

IMPORTANT: Remember the following:


- In this wiring diagram, the module provides 24V DC loop power.
- If separate power sources are used, do not exceed the specific isolation voltage as listed in the specifications.
- Place additional loop devices, for example, strip chart recorders, at either 'A' location in the current loop.

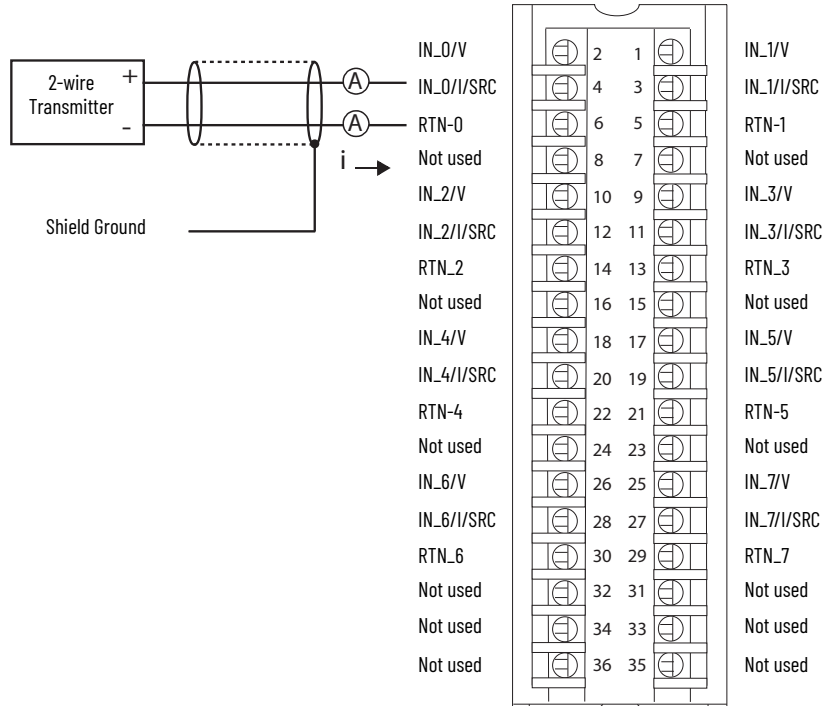


1756-IF8I, 1756-IF8IK Module Wiring Diagram - Voltage Mode

IMPORTANT: If separate power sources are used, do not exceed the specific isolation voltage as listed in the specifications.


Device
External
Power



IN_0/V
IN_0/I/SRC
RTN-0
Not used
IN_2/V
IN_2/I/SRC
RTN_2
Not used
IN_4/V
IN_4/I/SRC
RTN-4
Not used
IN_6/V
IN_6/I/SRC
RTN_6
Not used
Not used
Not used

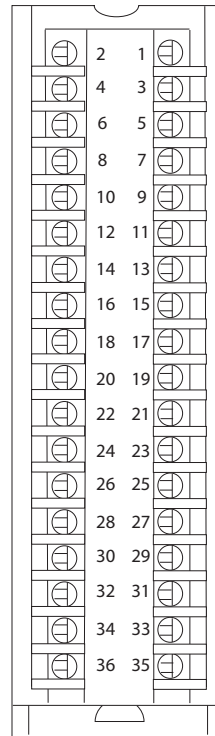

IN_1/V
IN_1/I/SRC
RTN-1
Not used
IN_3/V
IN_3/I/SRC
RTN_3
Not used
IN_5/V
IN_5/I/SRC
RTN-5
Not used
IN_7/V
IN_7/I/SRC
RTN_7
Not used
Not used



Technical Specifications

| Attribute | 1756-IF8I, 1756-IF8IK |
|-----------------------------|---|
| Inputs | Eight isolated channels - Any combination of Voltage or Current mode |
| Voltage and current ratings | Backplane: 5.1V DC 200 mA, 24V DC 400 mA Input Voltage: -10V to +10V, 0V to 10V, 0V to 5V Input Current: 0...20 mA Output Current: 0...20 mA |
| Input ranges | -10...10V 0...10V 0...5V 0...20 mA |
| Resolution | 24-bit ±10.5V (1.49 µV/count) 0...10.5V (1.49 µV/count) 0...5.25V (1.49 µV/count) 0...21 mA (2.99 nA/count) |
| Current draw @ 5.1V | 200 mA |
| Current draw @ 24V | Voltage/Non-sourcing Current mode: 150 mA Sourcing Current mode: 400 mA (In Sourcing Current mode, the channel provides loop power.) |
| Total backplane power | Voltage/Non-sourcing Current mode: 4.6 W Sourcing Current mode: 10.6 W |
| Power dissipation | Voltage mode: 4.6 W (15.7 BTU/hr) Non-sourcing Current mode: 5.1 W (17.4 BTU/hr) Sourcing Current mode: 7.3 W (24.9 BTU/hr) |
| Thermal dissipation | Voltage mode: 15.7 BTU/hr Non-sourcing Current mode: 17.4 BTU/hr Sourcing Current mode: 24.9 BTU/hr |
| Input impedance, approx | Voltage mode: 1 G Ω (powered); 7500 Ω (unpowered) Current mode: 125 Ω |
| Sourcing voltage, min | 20V DC |
| Sourcing voltage, max | 36V DC (open circuit) |
| Sourcing current, max | Current Limited < 45 mA (IN_x/I/SRC to RTN_x) |

Technical Specifications (Continued)

| Attribute | 1756-IF81, 1756-IF81K |
|--|---|
| Open circuit detection time | 5 s |
| Overvoltage protection, max | ±30V DC |
| Normal mode noise rejection | 80 dB @ 60 Hz ⁽¹⁾ |
| Common mode noise rejection | 120 dB @ 50/60 Hz |
| Channel bandwidth | Notch filter configuration dependent See publication 1756-UM540 for possible values. |
| Settling time | Notch filter configuration dependent See publication 1756-UM540 for possible values. |
| Calibrated accuracy 25 °C (77 °F) | 0.05% |
| Module error over full temperature range | 0.1% |
| Module input scan time, min | 1 ms |
| Onboard data alarming | Yes |
| Scaling to engineering units | Yes |
| Real-time channel sampling | Yes - Rate set by Requested Packet Interval rate |
| Data format | IEEE 32-bit floating point |
| Module conversion method | Sigma-Delta |
| Isolation voltage | 250V (continuous), reinforced insulation type, inputs to backplane 250V (continuous), basic insulation type, input to input |
| Module keying | Electronic, software configurable |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire size | 1756-TBCH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. 1756-TBS6H Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. |
| Wire category | 2 on signal ports ⁽²⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |

(1) Notch filter dependent.

(2) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IF8I, 1756-IF8IK |
|--|---|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | Series B ±8 kV contact discharges ±8 kV air discharges Series A 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | Series B 20V/m with 1 kHz sine wave 80% AM from 80...1000 MHz 10V/m with 1 kHz sine wave 80% AM from 1000...2000 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...6000 MHz Series A 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | Series B ±4 kV at 5 kHz and 100 kHz on shielded signal ports Series A ±4 kV at 5 kHz on shielded signal ports |
| Surge transient immunity IEC 61000-4-5 | ±2 kV line-earth (CM) on shielded signal ports |
| Conducted RF immunity IEC 61000-4-6 | Series B 20V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz Series A 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IF81, 1756-IF81K |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: <ul style="list-style-type: none"> EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: <ul style="list-style-type: none"> EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0 Edition 7; General Requirements EN IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc UL 22 ATEX 2772X |
| IECEx | IECEx System, compliant with: <ul style="list-style-type: none"> IEC 60079-0 Edition 7; General Requirements IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc IECEx UL 22.0039X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2499X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1 er muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IF16, 1756-IF16K

ControlLogix current/voltage analog input module

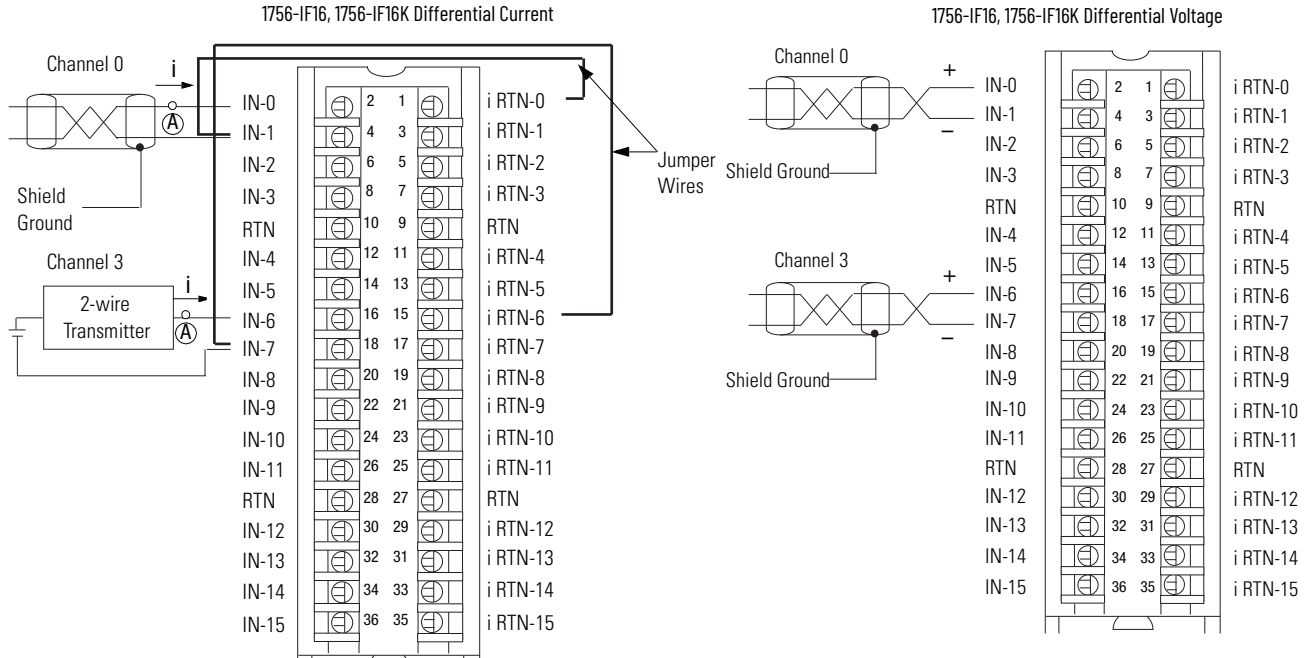

Use this table when wiring your module in Differential Current mode.

| This Channel | Uses these terminals |
|--------------|--------------------------------|
| Channel 0 | IN-0 (+), IN-1 (-), i RTN-0 |
| Channel 1 | IN-2 (+), IN-3 (-), i RTN-2 |
| Channel 2 | IN-4 (+), IN-5 (-), i RTN-4 |
| Channel 3 | IN-6 (+), IN-7 (-), i RTN-6 |
| Channel 4 | IN-8 (+), IN-9 (-), i RTN-8 |
| Channel 5 | IN-10 (+), IN-11 (-), i RTN-10 |
| Channel 6 | IN-12 (+), IN-13 (-), i RTN-12 |
| Channel 7 | IN-14 (+), IN-15 (-), i RTN-14 |

- All terminals marked RTN are connected internally.
- A 249 Ω current loop resistor is located between IN-x and i RTN-x terminals.
- If multiple (+) or multiple (-) terminals are tied together, connect that tie point to an RTN terminal to maintain the accuracy of the module.
- Place additional loop devices (such as strip chart recorders) at the A location in the current loop.


IMPORTANT: When operating in 4-channel, High-Speed mode, only use channels 0, 2, 4, and 6.

Use this table when wiring your module in Differential Voltage mode.

| This Channel | Uses these terminals |
|--------------|----------------------|
| Channel 0 | IN-0 (+), IN-1 (-) |
| Channel 1 | IN-2 (+), IN-3 (-) |
| Channel 2 | IN-4 (+), IN-5 (-) |
| Channel 3 | IN-6 (+), IN-7 (-) |
| Channel 4 | IN-8 (+), IN-9 (-) |
| Channel 5 | IN-10 (+), IN-11 (-) |
| Channel 6 | IN-12 (+), IN-13 (-) |
| Channel 7 | IN-14 (+), IN-15 (-) |

- All terminals marked RTN are connected internally.
- If multiple (+) or multiple (-) terminals are tied together, connect that tie point to an RTN terminal to maintain the accuracy of the module.
- Terminals marked RTN or i RTN are not used for differential voltage wiring.


IMPORTANT: When operating in 4-channel, High-Speed mode, only use channels 0, 2, 4, and 6.

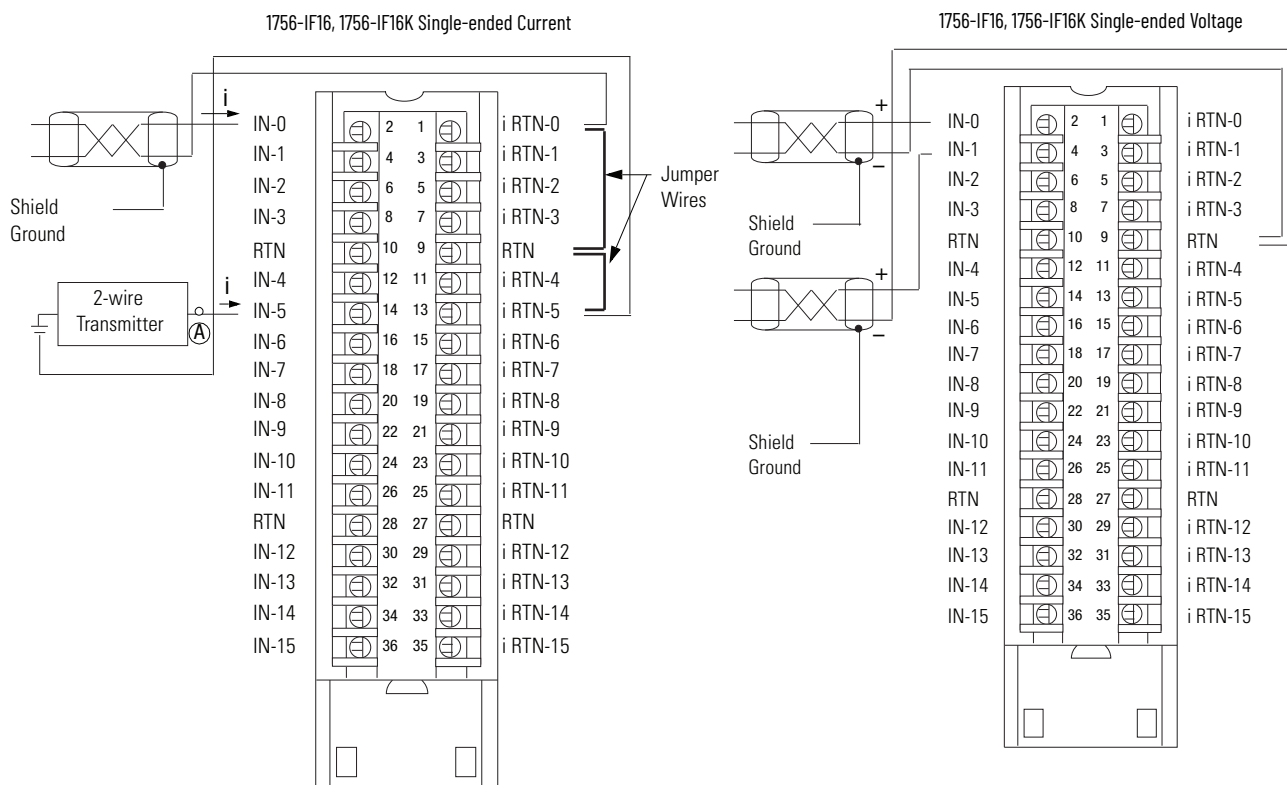


- All terminals marked RTN are connected internally.
- For current applications, all terminals marked i RTN must be wired to terminals marked RTN.
- A 249 Ω current loop resistor is located between IN-x and i RTN-x terminals.
- Place additional loop devices (such as strip chart recorders) at the A location in the current loop.

- All terminals marked RTN are connected internally.
- Terminals marked i RTN are not used for single-ended voltage wiring.

Series A



Series B



Technical Specifications

| Attribute | 1756-IF16/A, 1756-IF16K/A | 1756-IF16/B, 1756-IF16K/B |
|-----------------------|---|---------------------------|
| Inputs | 16 single ended, 8 differential or 4 differential (high speed) | |
| Input range | ±10V 0...10V 0...5V 0...20 mA | |
| Resolution | 320 μV/count (15 bits + sign bipolar) @ ±10.25V 160 μV/count (16 bits) @ 0...10.25V 80 μV/count (16 bits) @ 0...5.125V 0.32 μA/count (16 bits) @ 0...20.5 mA | |
| Current draw @ 5.1V | 150 mA | 200 mA |
| Current draw @ 24V | 65 mA | 35 mA |
| Total backplane power | 2.33 W | 1.86 W |

Technical Specifications (Continued)

| Attribute | 1756-IF16/A, 1756-IF16K/A | 1756-IF16/B, 1756-IF16K/B |
|--|---|--|
| Voltage and current ratings | Backplane: 5.1V DC, 150 mA max 24V DC, 65 mA max Input Voltage Range: -10...+10V Input Current Range: 4...20mA Limited to 100VA | Backplane: 5.1V DC, 200 mA max 24V DC, 35 mA max Input Voltage Range: -10...+10V Input Current Range: 0...20mA Limited to 100VA |
| Power consumption | 2.33 W | |
| Power dissipation | Voltage: 2.33 W Current: 4.00 W | Voltage: 1.86 W Current: 3.53 W |
| Thermal dissipation | Voltage: 7.93 BTU/hr Current: 13.65 BTU/hr | Voltage: 6.35 BTU/hr Current: 12.06 BTU/hr |
| Input impedance | Voltage: $\geq 10 \text{ M}\Omega$ Current: 249 Ω | |
| Open circuit detection time | Differential voltage - Positive full-scale reading within 5 s Single-ended/differential current - Negative full-scale reading within 5 s Single-ended voltage - Even-numbered channels go to positive full-scale reading within 5s, odd-numbered channels go to negative full-scale reading within 5 s | |
| Overvoltage protection, max | Voltage: 30V DC Current: 8V DC | |
| Normal mode noise rejection | $>80 \text{ dB @ } 50/60 \text{ Hz}^{(1)}$ | |
| Common mode noise rejection | $>100 \text{ dB @ } 50/60 \text{ Hz}$ | |
| Channel bandwidth | 15 Hz ($-3 \text{ dB}^{(1)}$) | |
| Calibrated accuracy 25 °C (77 °F) | Voltage: Better than 0.05% of range Current: Better than 0.15% of range | |
| Offset drift | 45 $\mu\text{V}/^\circ\text{C}$ | |
| Gain drift with temperature | Voltage: 15 ppm/ $^\circ\text{C}$ Current: 20 ppm/ $^\circ\text{C}$ | |
| Module error | Voltage: 0.1% of range Current: 0.3% of range | |
| Module input scan time, min ⁽¹⁾ | 16 pt single-ended: 16...488 ms 8 pt differential: 8...244 ms 4 pt differential: 5...122 ms | |
| Onboard data alarming | Yes | |
| Scaling to engineering units | Yes | |
| Real-time channel sampling | Yes | |
| Data format | Integer mode (left justified, 2 s complement) IEEE 32-bit floating point | |
| Module conversion method | Sigma-Delta | |
| Isolation voltage | 250V (continuous), Reinforced insulation type, Inputs-to-Backplane. No isolation between individual Inputs. | 250V (continuous), Basic ⁽²⁾ insulation type, Inputs-to-Backplane. No isolation between individual Inputs. |
| Module keying | Electronic, software configurable | |
| Removable terminal block | 1756-TBCH 1756-TBS6H | |
| RTB keying | User-defined mechanical | |
| Slot width | 1 | |
| Wire size | 1756-TBCH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. 1756-TBS6H Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. | |
| Terminal block torque specs | 1756-TBCH: 0.5 N•m (4.4 lb•in) | |
| Wire category ⁽³⁾ | 2 - on signal ports | |
| Enclosure type | None (open-style) | |
| Temperature code | T4 | |

(1) Notch filter dependent.

(2) Series A modules were specified to Reinforced Insulation based on UL508 terminology. Series B modules are type-tested to the same Dielectric strength voltage as series A modules but use updated terminology based on IEC 61010-1, Basic Insulation.

(3) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IF16/A, 1756-IF16K/A | 1756-IF16/B, 1756-IF16K/B |
|--|--|---------------------------|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Variation of Temperature) | 0 °C < Ta < +60 °C (+32 °F < Ta < +140 °F) | |
| Temperature, surrounding air, max | 60 °C (140 °F) | |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) | |
| Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Damp Heat) | 5...95% noncondensing | |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz | |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g | |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g | 30 g |
| Emissions | IEC 61000-6-4 | |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges | |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz | |
| EFT/B immunity IEC 61000-4-4 | ±2 kV at 5 kHz on signal ports | |
| Surge transient immunity IEC 61000-4-5 | ±2 kV line-earth (CM) on shielded ports | |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz | |

Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IF16/A, 1756-IF16K/A | 1756-IF16/B, 1756-IF16K/B |
|---|--|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. | |
| FM | FM Approved Equipment for use in Class I Division 2 Group A, B, C, D Hazardous Locations | |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: <ul style="list-style-type: none"> EN 61131-2; Programmable Controllers (Clause 11) | |
| RCM | Australian Radiocommunications Act, compliant with: <ul style="list-style-type: none"> EN 61000-6-4; Industrial Emissions | |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN 60079-0; General Requirements EN 60079-15; Potentially Explosive Atmospheres, Protection "n" II 3 G Ex nA IIC T4 Gc DEMKO15ATEX1482X | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0; General Requirements EN IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc UL 22 ATEX 2772X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0; General Requirements IEC 60079-15; Potentially Explosive Atmospheres, Protection "n" II 3 G Ex nA IIC T4 Gc IECEX UL 15.0053X | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0; General Requirements IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0039X |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: <ul style="list-style-type: none"> Article 58-2 of Radio Waves Act, Clause 3 | |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation | |
| UKex | N/A | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2499X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| UKCA | N/A | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | N/A | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | N/A | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.


1756-IRT8I, 1756-IRT8IK

ControlLogix isolated RTD/Thermocouple analog input module.

1756-IRT8I, 1756-IRT8IK Module Wiring Diagram - 3-wire RTD Input

IMPORTANT: Remember the following:


- If separate power sources are used, do not exceed the specific isolation voltage as listed in the specifications.
- Terminals 1, 2, 35, and 36 are not used in RTD applications.
- For 2-wire resistor applications including calibration, make sure IN_x(-)/B and IN_x/RTD C are shorted together.

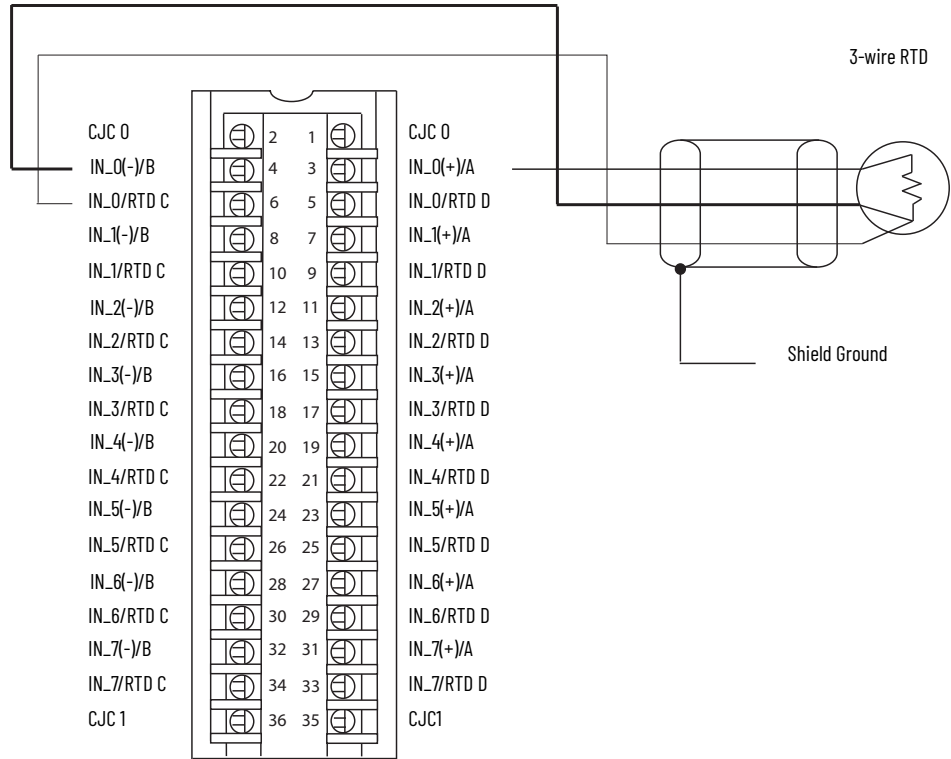

1756-IRT8I, 1756-IRT8IK Module Wiring Diagram - 4-wire RTD Input

IMPORTANT: Remember the following:

- If separate power sources are used, do not exceed the specific isolation voltage as listed in the specifications.
- Terminals 1, 2, 35, and 36 are not used in RTD applications.

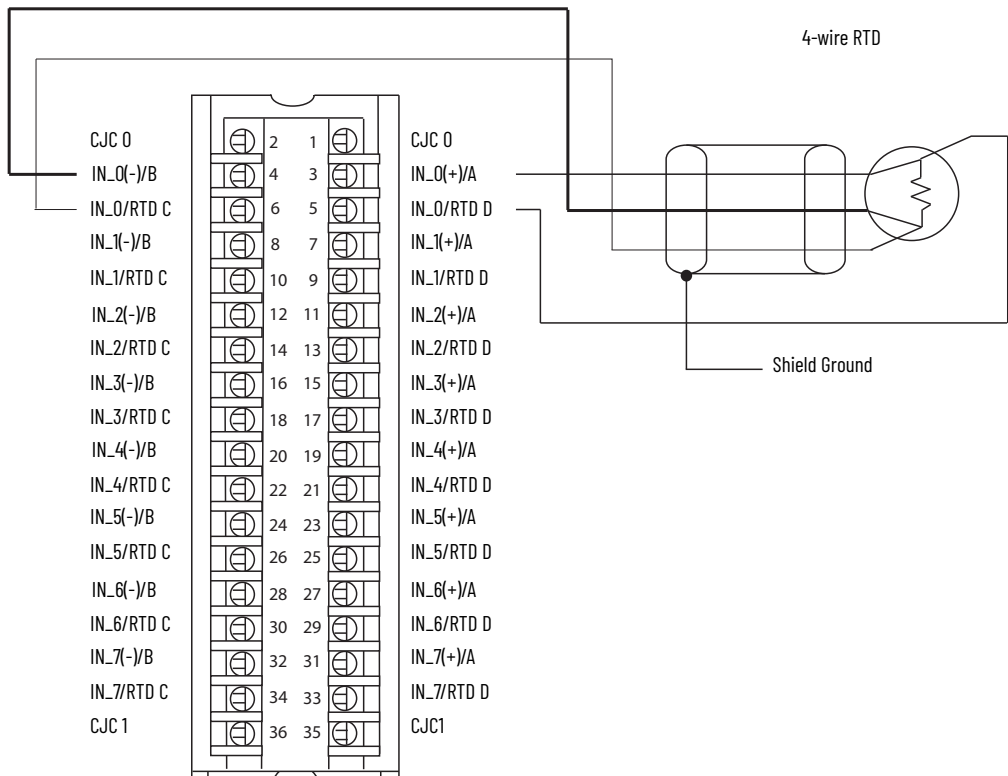

1756-IRT8I, 1756-IRT8IK Module Wiring Diagram - Thermocouple Input

IMPORTANT: Remember the following:

- Connect the white end of the CJC sensor to the even-numbered terminal. Connect the orange end of the CJC sensor to the odd-numbered terminals.



For CJC 0:

- White end - Connected to terminal number 2
- Orange end - Connected to terminal number 1

For CJC 1:

- White end - Connected to terminal number 36
- Orange end - Connected to terminal number 35

- CJC sensors do not come with the module. You must order the sensors, product catalog number 1756-CJC, separately.
- If separate power sources are used, do not exceed the specific isolation voltage as listed in the specifications.

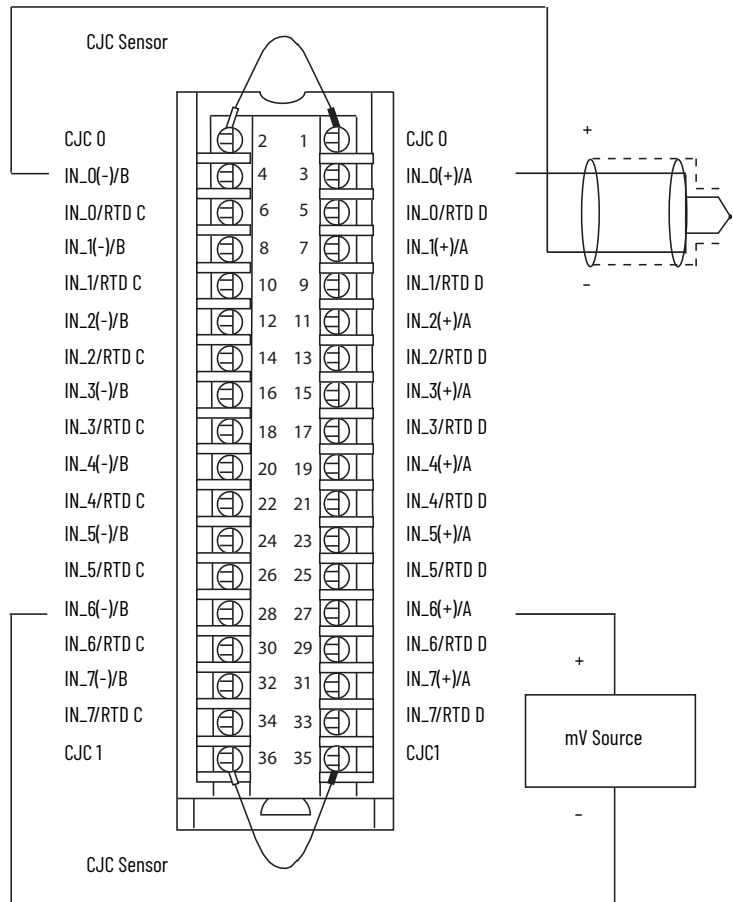

Technical Specifications

| Attribute | 1756-IRT8I/A, 1756-IRT8IK/A | 1756-IRT8I/B, 1756-IRT8IK/B |
|-----------------------------|--|---|
| Inputs | Eight isolated channels - Any combination of RTD or Thermocouple mode Two CJC sensors for Thermocouple use. The CJC sensors, product catalog number 1756-CJC, do not come with the module. You must order the sensors separately. | |
| Input range | 1...500 Ω 2...1000 Ω 4...2000 Ω 8...4000 Ω -100...+100 mV | |
| Resolution | 24 bits 0...510 Ω: 0.06 mΩ/count 0...1020 Ω: 0.12 mΩ/count 0...2040 Ω: 0.25 mΩ/count 0...4080 Ω: 0.50 mΩ/count -101...+101 mV: 0.01 μV/count | |
| RTD sensors supported | 100, 200, 500, 1000 Ω Platinum, alpha=385 100, 200, 500, 1000 Ω Platinum, alpha=3916 120 Ω Nickel, alpha=672 100, 120, 200, 500 Ω Nickel, alpha=618 10 Ω Copper, alpha=427 | |
| Thermocouple types | B, C, D, E, J, K, N, R, S, T, TXK/XK (L) | |
| Thermocouple linearization | ITS-90 | |
| Current draw @ 5.1V | 200 mA | 210 mA |
| Current draw @ 24V | 150 mA | |
| Total backplane power | 4.6 W | 4.67 W |
| Voltage and current ratings | Backplane: 5.1V DC, 200 mA, 24V DC, 150 mA Input: 1...4000 Ohms, +/-100 mV, Thermocouple; B,C,E,J,K,R,S,T,N,D,L | Backplane: 5.1V DC, 210 mA, 24V DC, 150 mA Input: 1...4000 Ohms, +/-100 mV, Thermocouple; B,C,E,J,K,R,S,T,N,D,L |

Technical Specifications (Continued)

| Attribute | 1756-IRT8I/A, 1756-IRT8IK/A | 1756-IRT8I/B, 1756-IRT8IK/B |
|--|--|-----------------------------|
| Power dissipation, max | 4.6 W(15.7 BTU/hr) | 4.67 W (15.9 BTU/hr) |
| Thermal dissipation | 15.7 BTU/hr | 15.9 BTU/hr |
| RTD excitation current | 600 µA | |
| Input impedance, approx | 1 GΩ | |
| Open circuit detection time | <ul style="list-style-type: none"> Thermocouple input and 3-wire RTD input = 2 s 4-wire RTD input = 5 s <p>IMPORTANT: No Open Circuit Detection when wires are simultaneously disconnected from the IN_x/RTD C and IN_x/RTD D terminals on same channel; where x represents the channel number.</p> | |
| Overvoltage protection, max | ±30V DC | |
| Normal mode noise rejection | 75 dB at 60 Hz ⁽¹⁾ | |
| Common mode noise rejection | 125 dB @ 60 Hz 1000 Ω differential 120 dB @ 50 Hz 1000 Ω differential 160 dB @ 600V 100 Ω differential | |
| Channel bandwidth | Notch filter configuration dependent | |
| Settling time | See publication 1756-UM540 for possible values. | |
| Calibrated accuracy @ 25 °C | 0.05% | |
| Module error over full temperature range | 0.1% | |
| Local CJC sensor accuracy | ± 0.3 °C | |
| Remote CJC sensor, accuracy | ± 0.3 °C | |
| Module input scan time, min | 1 ms | |
| Data format | IEEE 32-bit floating point | |
| Module conversion method | Sigma-Delta | |
| Isolation voltage | 250V (continuous), reinforced insulation type, inputs to backplane. 250V (continuous), basic insulation type, input to input. | |
| RTD sensor types/temperature range (Each sensor type in a cell supports all temperature ranges in the corresponding column to the right.) | | |
| 100 Ω PT 385 20 Ω PT 385 500 Ω PT 385 1000 Ω PT 385 | -200...+870 °C (-328...+1598 °F) 73...1143 °K 132...2058 °R | |
| 100 Ω PT 3916 20 Ω PT 3916 500 Ω PT 3916 1000 Ω PT 3916 | -200...+630 °C (-328...+1166 °F) 73...903 °K 132...1626 °R | |
| 10 Ω CU 427 | -200...+260 °C (-328...+500 °F) 73...533 °K 132...960 °R | |
| 120 Ω NI 672 | -80...+320 °C (-112...+608 °F) 193...593 °K 348...1068 °R | |
| 100 Ω NI 618 120 Ω NI 618 200 Ω NI 618 500 Ω NI 618 | -60...+250 °C (-76...+482 °F) 213...523 °K 384...942 °R | |
| Thermocouple type/temperature range | | |
| Thermocouple Type B | 21...1820 °C (68...3308 °F) 293...2093 °K 528...3768 °R | |
| Thermocouple Type C | 0...2320 °C (32...4208 °F) 273...2593 °K 492...4668 °R | |
| Thermocouple Type D | 0...2320 °C (32...4208 °F) 273...2593 °K 492...4668 °R | |
| Thermocouple Type E | -270...+1000 °C (-454...+1832 °F) 3...1273 °K 6...2292 °R | |
| Thermocouple Type J | -210...+1200 °C (-346...+2192 °F) 63...1473 °K 114...2652 °R | |

Technical Specifications (Continued)

| Attribute | 1756-IRT8I/A, 1756-IRT8IK/A | 1756-IRT8I/B, 1756-IRT8IK/B |
|-----------------------------------|---|-----------------------------|
| Thermocouple Type K | -270...+1372 °C (-454...+2502 °F) 3...1645 °K 6...2961 °R | |
| Thermocouple Type N | -270...+1300 °C (-454...+2372 °F) 3...1573 °K 6...2832 °R | |
| Thermocouple Type R | -50...+1768 °C (-58...+3215 °F) 223...2041 °K 402...3674 °R | |
| Thermocouple Type S | -50...+1768 °C (-58...+3215 °F) 223...2041 °K 402...3674 °R | |
| Thermocouple Type T | -270...+400 °C (-454...+752 °F) 3...673 °K 6...1212 °R | |
| Thermocouple Type TXK/XK (L) | -200...+800 °C (-328...+1472 °F) 73...1073 °K 132...1932 °R | |
| Thermocouple type/resolution, nom | | |
| Type C, R | ~0.03 °C (~0.05 °F) | |
| Type B, S | ~0.04 °C (~0.07 °F) | |
| Type E, J, K, N, T, TXK/XK (L) | ~0.01 °C (~0.02 °F) | |
| Type D | ~0.02 °C (~0.04 °F) | |
| Module keying | Electronic, software configurable | |
| Removable terminal block | 1756-TBCH 1756-TBS6H | |
| RTB keying | User-defined mechanical | |
| Slot width | 1 | |
| Wire size | 1756-TBCH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. 1756-TBS6H Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. | |
| Wire category ⁽²⁾ | 2 - on signal ports | |
| Enclosure type | None (open-style) | |
| Temperature code | T4 | |

(1) Notch filter dependent.

(2) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IRT8I/A, 1756-IRT8IK/A | 1756-IRT8I/B, 1756-IRT8IK/B |
|--|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) | |
| Temperature, surrounding air, max | 60 °C (140 °F) | |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) | |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing | |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz | |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g | |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g | |
| Emissions | IEC 61000-6-4 | |
| ESD immunity IEC 61000-4-2 | Shielded thermocouple cable recommended 6 kV contact discharges 8 kV air discharges | Shielded thermocouple cable recommended ±8 kV contact discharges ±8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz | 20V/m with 1 kHz sine wave 80% AM from 80...1000 MHz 10V/m with 1 kHz sine wave 80% AM from 1000...6000 MHz |
| EFT/B immunity IEC 61000-4-4 | Shielded thermocouple cable recommended ±4 kV at 5 kHz on shielded signal ports | Shielded thermocouple cable recommended ±4 kV at 5 kHz and 100 kHz on shielded signal ports |
| Surge transient immunity IEC 61000-4-5 | ±2 kV line-earth (CM) on shielded signal ports | |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz | |

Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IRT8I, 1756-IRT8IK |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> IEC 60079-0 Edition 7; General Requirements EN IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc UL 22 ATEX 2772X |
| IECEx | IECEx System, compliant with: <ul style="list-style-type: none"> IEC 60079-0 Edition 7; General Requirements IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc IECEx UL 22.0039X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2499X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 2020122309111830, 2020122309111998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |




(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IR12, 1756-IR12K

ControlLogix RTD analog input module

IMPORTANT: Remember the following:

- If separate power sources are used, do not exceed the specific isolation voltage as listed in the specifications.
- For 2-wire resistor applications including calibration, make sure IN_x/B and RTN_x/C are shorted together.

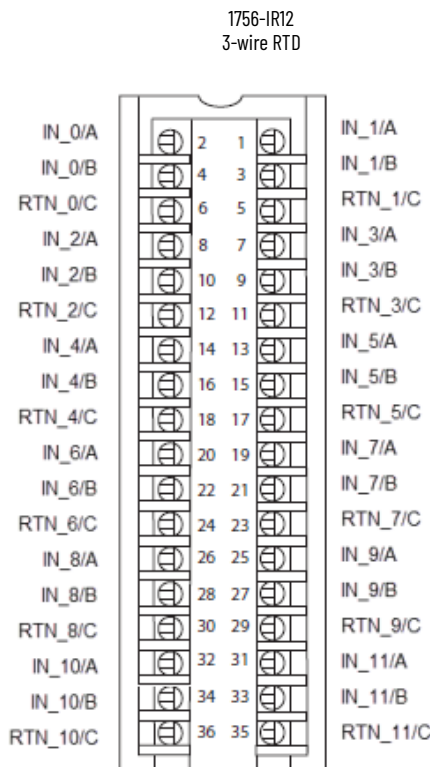

Technical Specifications

| Attribute | 1756-IR12, 1756-IR12K |
|-----------------------|--|
| Inputs | 12 channels RTD mode |
| Input range | 1...500 Ω 2...1000 Ω 4...2000 Ω 8...4000 Ω |
| Resolution | 24 bits 0...510 Ω: 0.06 mΩ/count 0...1020 Ω: 0.12 mΩ/count 0...2040 Ω: 0.25 mΩ/count 0...4080 Ω: 0.50 mΩ/count |
| RTD sensors supported | 100, 200, 500, 1000 Ω Platinum, alpha=385 100, 200, 500, 1000 Ω Platinum, alpha=3916 120 Ω Nickel, alpha=672 100, 120, 200, 500 Ω Nickel, alpha=618 10 Ω Copper, alpha=427 |
| Current draw @ 5.1V | Series B 210 mA Series A 200 mA |
| Current draw @ 24V | 70 mA |
| Total backplane power | Series B 2.75 W Series A 2.7 W |

Technical Specifications (Continued)

| Attribute | 1756-IR12, 1756-IR12K |
|--|---|
| Power dissipation, max | Series B 2.75 W Series A 2.7 W |
| Thermal dissipation | Series B 9.38 BTU/hr Series A 9.2 BTU/hr |
| RTD excitation current | 600 μ A |
| Overvoltage protection, max | \pm 30V DC |
| Common mode noise rejection | 120 dB @ 60 Hz 1000 Ω differential 100 dB @ 50 Hz 1000 Ω differential |
| Channel bandwidth | Notch filter configuration dependent See publication 1756-UM540 for possible values. |
| Settling time | Notch filter configuration dependent See publication 1756-UM540 for possible values. |
| Open circuit detection | Positive full-scale reading within 2 s |
| Calibrated accuracy @ 25 °C | 0...510 Ω range: 0.1% Other Ω ranges: 0.25% |
| Module error over full temperature range | 0...510 Ω range: 0.2% Other Ω ranges: 0.5% |
| Module input scan time, min | 50 ms |
| Data format | IEEE 32-bit floating point |
| Module conversion method | Sigma-Delta |
| Isolation Voltage | 250V (continuous), reinforced insulation type, inputs to backplane No isolation between individual inputs |
| RTD sensor types/temperature range (Each sensor type in a cell supports all temperature ranges in the corresponding column to the right.) | |
| 100 Ω PPT 385 20 Ω PT 385 500 Ω PT 385 1000 Ω PT 385 | -200...+870 °C (-328...+1598 °F) 73...1143 °K 132...2058 °R |
| 100 Ω PT 3916 20 Ω PT 3916 500 Ω PT 3916 1000 Ω PT 3916 | -200...+630 °C (-328...+1166 °F) 73...903 °K 132...1626 °R |
| 100 Ω CU 427 | -200...+260 °C (-328...+500 °F) 73...533 °K 132...960 °R |
| 120 Ω NI 672 | -80...+320 °C (-112...+608 °F) 193...593 °K 348...1068 °R |
| 100 Ω NI 618 120 Ω NI 618 200 Ω NI 618 500 Ω NI 618 | -60...+250 °C (-76...+482 °F) 213...523 °K 384...942 °R |
| Module keying | Electronic, software configurable |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire size | 1756-TBCH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. 1756-TBS6H Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. |

Technical Specifications (Continued)

| Attribute | 1756-IR12, 1756-IR12K |
|------------------|----------------------------------|
| Wire category | 2 on signal ports ⁽¹⁾ |
| Enclosure type | None (open-style) |
| Temperature Code | T4 |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IR12, 1756-IR12K |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions IEC 61000-6-4 | IEC 61000-6-4 |
| ESD Immunity IEC 61000-4-2 | Series B ±8 kV contact discharges ±8 kV air discharges Series A 6 kV contact discharges 8 kV air discharges |
| Radiated RF Immunity IEC 61000-4-3 | Series B 10V/m with 1 kHz sine wave 80% AM from 80...1000 MHz 10V/m with 1 kHz sine wave 80% AM from 1000...6000 MHz Series A 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM at 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM at 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B Immunity IEC 61000-4-4 | Series B ±4 kV at 5 kHz and 100 kHz on shielded signal ports Series A ±2 kV at 5/100kHz on shielded ports |
| Surge Transient Immunity IEC 61000-4-5 | ±2 kV line-earth (CM) on shielded ports |
| Conducted RF Immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |

Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IR12, 1756-IR12K |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2004/108/EC EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: <ul style="list-style-type: none"> EN 61010-2-201; Control Equipment Safety Requirements |
| RCM | Australian Radiocommunications Act, compliant with: <ul style="list-style-type: none"> EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0 Edition 7; General Requirements EN IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc UL 22 ATEX 2772X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0 Edition 7; General Requirements IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0039X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2499X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |



(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IT16, 1756-IT16K

ControlLogix thermocouple analog input module.

IMPORTANT: Remember the following:

- Connect the white end of the CJC sensor to the even-numbered terminal. Connect the orange end of the CJC sensor to the odd-numbered terminals.
- For CJC 0:
 - Orange end - Connected to terminal number 35
 - Orange end - Connected to terminal number 35
 - Orange end - Connected to terminal number 35
- CJC sensors do not come with the module. You must order the sensors, product catalog number 1756-CJC, separately.
- If separate power sources are used, do not exceed the specific isolation voltage as listed in the specifications.

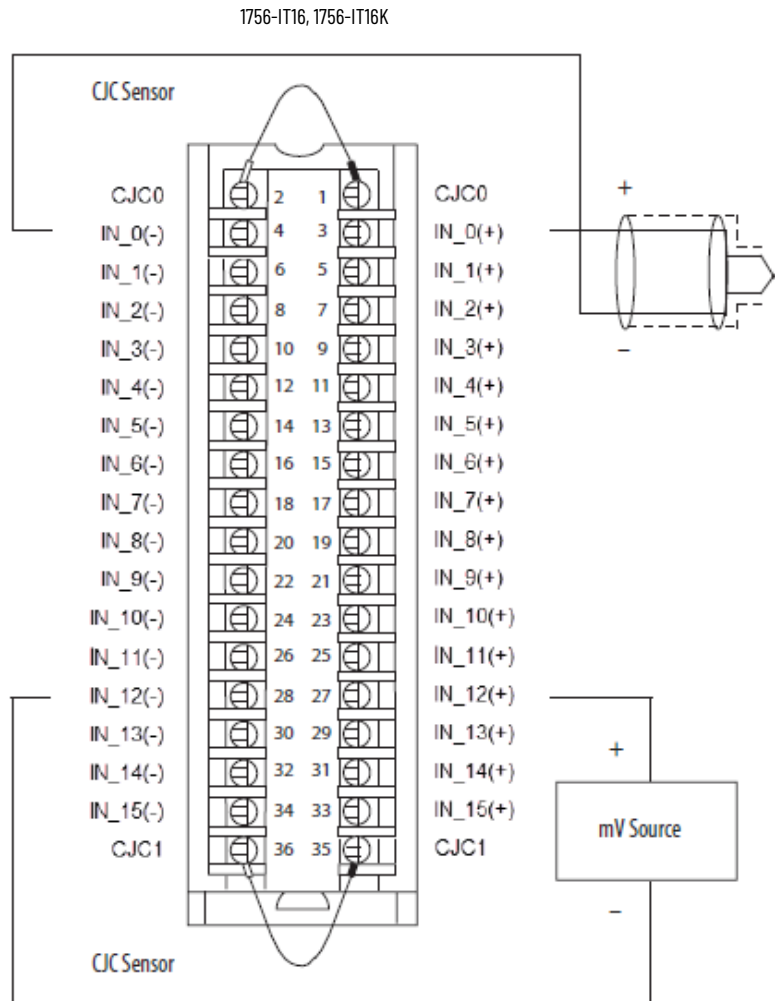

Technical Specifications

| Attribute | 1756-IT16, 1756-IT16K |
|----------------------------|---|
| Inputs | 16 channels, thermocouple mode Two CJC sensors for Thermocouple use. The CJC sensors, product catalog number 1756-CJC, do not come with the module. You must order the sensors separately. |
| Input range | -100...+100 mV Max 5VA |
| Resolution | 24 bits -101...+101 mV: 0.01 μ V/count |
| Thermocouple types | B, C, D, E, J, K, N, R, S, T, TXK/XK (L) |
| Thermocouple linearization | ITS-90 |
| Current draw @ 5.1V | Series B 210 mA Series A 200 mA |
| Current draw @ 24V | 80 mA |
| Total backplane power | 3 W |
| Power dissipation, max | 3 W |

Technical Specifications (Continued)

| Attribute | 1756-IT16, 1756-IT16K |
|--|--|
| Thermal dissipation | Series B 10.20 BTU/hr Series A 9.9 BTU/hr |
| Input impedance, approx | 1 GΩ |
| Overvoltage protection, max | ±30V DC |
| Normal mode noise rejection | 75 dB at 60 Hz ⁽¹⁾ |
| Common mode noise rejection | 120 dB @ 60 Hz 1000 Ω differential 100 dB @ 50 Hz 1000 Ω differential |
| Channel bandwidth | Notch filter configuration dependent See publication 1756-UM540 for possible values. |
| Settling time | Notch filter configuration dependent See publication 1756-UM540 for possible values. |
| Open circuit detection | Positive full-scale reading within 2 s |
| Calibrated accuracy @ 25 °C | 0.1% |
| Module error over full temperature range | 0.2% |
| Local CJC sensor accuracy | ± 0.3 °C |
| Remote CJC sensor, accuracy | ± 0.3 °C |
| Module input scan time, min | 50 ms |
| Data format | IEEE 32-bit floating point |
| Module conversion method | Sigma-Delta |
| Isolation voltage | 250V (continuous), reinforced insulation type, inputs to backplane No isolation between individual inputs |
| Thermocouple type/temperature range | |
| Thermocouple Type B | 21...1820 °C (68...3308 °F) 293...2093 °K 528...3768 °R |
| Thermocouple Type C | 0...2320 °C (32...4208 °F) 273...2593 °K 492...4668 °R |
| Thermocouple Type D | 0...2320 °C (32...4208 °F) 273...2593 °K 492...4668 °R |
| Thermocouple Type E | -270...+1000 °C (-454...+1832 °F) 3...1273 °K 6...2292 °R |
| Thermocouple Type J | -210...+1200 °C (-346...+2192 °F) 63...1473 °K 114...2652 °R |
| Thermocouple Type K | -270...+1372 °C (-454...+2502 °F) 3...1645 °K 6...2961 °R |
| Thermocouple Type N | -270...+1300 °C (-454...+2372 °F) 3...1573 °K 6...2832 °R |
| Thermocouple Type R | -50...+1768 °C (-58...+3215 °F) 223...2041 °K 402...3674 °R |
| Thermocouple Type S | -50...+1768 °C (-58...+3215 °F) 223...2041 °K 402...3674 °R |
| Thermocouple Type T | -270...+400 °C (-454...+752 °F) 3...673 °K 6...1212 °R |
| Thermocouple Type TXK/XK (L) | -200...+800 °C (-328...+1472 °F) 73...1073 °K 132...1932 °R |
| Thermocouple type/resolution, nom | |
| Type C, R | ~0.03 °C (~0.05 °F) |

Technical Specifications (Continued)

| Attribute | 1756-IT16, 1756-IT16K |
|--------------------------------|--|
| Type B, S | ~0.04 °C (~0.07 °F) |
| Type E, J, K, N, T, TXK/XK (L) | ~0.01 °C (~0.02 °F) |
| Type D | ~0.02 °C (~0.04 °F) |
| Module keying | Electronic, software configurable |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire size | 1756-TBCH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Do not wire more than one conductor on any single terminal. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Do not wire more than two conductors on any single terminal. 1756-TBS6H Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Do not wire more than one conductor on any single terminal. |
| Wire category | 2 on shielded signal ports ⁽²⁾ |
| Enclosure type | None (open-style) |
| Enclosure type rating | None (open-style) |
| Temperature Code | T4 |

(1) Notch filter dependent.

(2) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IT16, 1756-IT16K |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions IEC 61000-6-4 | IEC 61000-6-4 |
| ESD Immunity IEC 61000-4-2 | Series B +/-8 kV contact discharges +/-8 kV air discharges Series A 6 kV contact discharges 8 kV air discharges |

Environmental Specifications (Continued)

| Attribute | 1756-IT16, 1756-IT16K |
|---|--|
| Radiated RF Immunity IEC 61000-4-3 | Series B 10V/m with 1 kHz sine wave 80% AM from 80...1000 MHz 10V/m with 1 kHz sine wave 80% AM from 1000...6000 MHz Series A 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM at 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM at 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B Immunity IEC 61000-4-4 | Series B ±4 kV at 5 kHz and 100 kHz on shielded signal ports Series A ±2 kV at 5/100kHz on shielded ports |
| Surge Transient Immunity IEC 61000-4-5 | ±2 kV line-earth (CM) on shielded signal ports |
| Conducted RF Immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |

Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IT16, 1756-IT16K |
|---|--|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2004/108/EC EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: <ul style="list-style-type: none"> EN 61010-2-201; Control Equipment Safety Requirements |
| RCM | Australian Radiocommunications Act, compliant with: <ul style="list-style-type: none"> EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0 Edition 7; General Requirements EN IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc UL 22 ATEX 2772X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0 Edition 7; General Requirements IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0039X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2499X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |

Certifications (Continued)


| Certification (when product is marked)⁽¹⁾ | 1756-IT16, 1756-IT16K |
|---|---|
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> • 2016 No. 1091, Electromagnetic Compatibility Regulations • 2016 No. 1101, Electrical Equipment (Safety) Regulations • 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations • 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> • Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension • Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 2020122309111830, 2020122309111998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.


1756-OF4, 1756-OF4K

ControlLogix voltage/current output analog module

1756-OF4, 1756-OF4K Current

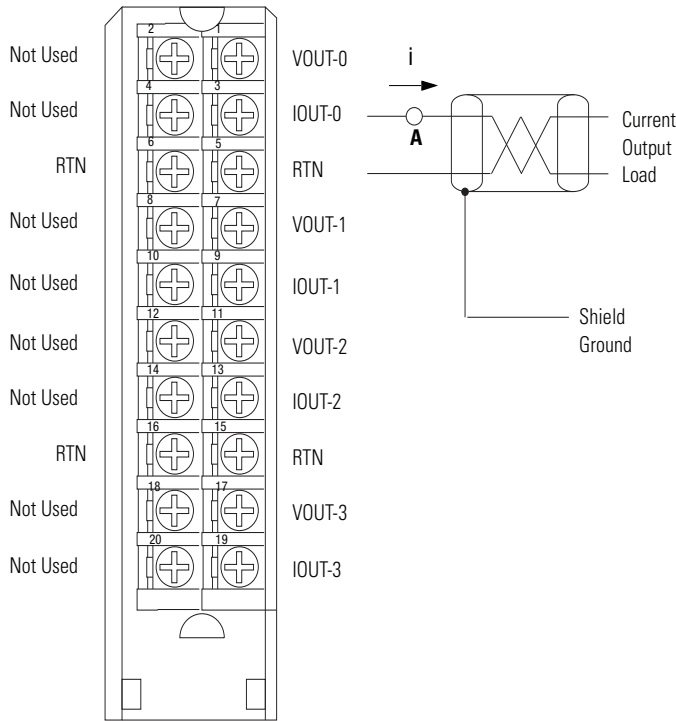


1756-OF4, 1756-OF4K Voltage

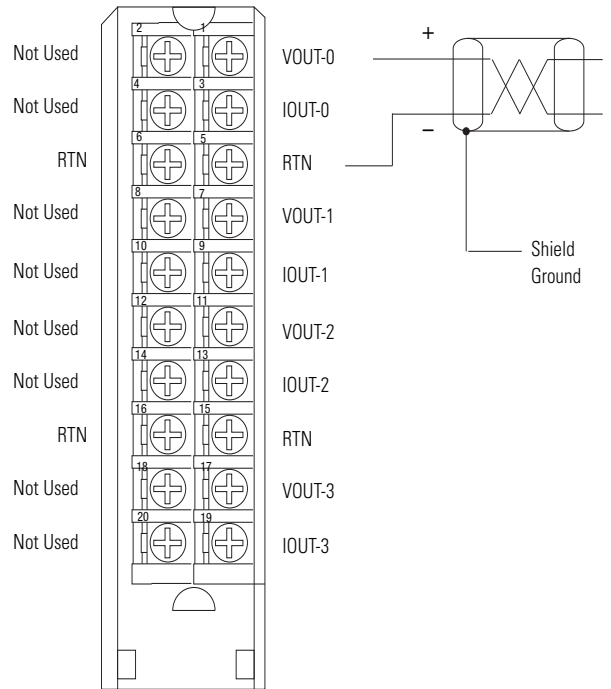


- Place additional loop devices (such as strip chart recorders) at the A location noted in the drawing.
- All terminals marked RTN are connected internally.

All terminals marked RTN are connected internally.

Series A



Series B



Signal and User Counts

| Range | Low Signal and User Counts | High Signal and User Counts |
|-----------|-----------------------------|-----------------------------|
| 0...20 mA | 0 mA -32,768 counts | 21.2916 mA 32,767 counts |
| ±10V | -10.4336V -32,768 counts | 10.4336V 32,767 counts |

Technical Specifications

| Attribute | 1756-OF4/A, 1756-OF4K/A | 1756-OF4/B, 1756-OF4K/B |
|----------------------------------|---|---|
| Outputs | Four voltage or current outputs | |
| Output range | ±10V 0...20 mA | ±10V 0...20 mA |
| Resolution | Voltage: 15 bits across 10.5V, 320 µV/bit Current: 16 bits across 21 mA, 325 nA/bit | |
| Voltage and current ratings | Backplane: 5.1V DC, 150 mA max; 24V DC, 120 mA max Output voltage: -10...+10V Output current: 0...20 mA | Backplane: 5.1V DC, 200 mA max; 24V DC, 155 mA max Output voltage: -10...+10V Output current: 0...20 mA |
| Current draw @ 5.1V | 150 mA | 200 mA max |
| Current draw @ 24V | 120 mA | 155 mA max |
| Total backplane power | 3.7 W | 4.74 W max |
| Power dissipation, max | 3.7 W; 0...750 ohm load | 4.74...1.74 W; 0...750 ohm load |
| Thermal dissipation | 10.91 BTU/hr | 16.17 BTU/hr |
| Open circuit detection | Current output only (Output must be set to >0.1 mA) | |
| Overvoltage protection | 24V DC | ±24V DC |
| Short circuit protection | Electronically current limited to 21 mA or less | |
| Drive capability | Voltage: >2000 Ω Current: 0...750 Ω | |
| Settling time | <2 ms to 95% of final value with resistive loads | |
| Calibrated accuracy | Better than 0.05% of range from 0...21 mA, -10.4...10.4V | |
| Calibration interval | 12 months typical | N/A |
| Offset drift | 50 µV/°C 100 nA/°C | 20 µV/°C 80 nA/°C |
| Gain drift with temperature, max | Voltage: 25 ppm/°C, 520 µV/°C Current: 50 ppm/°C, 1050 µA/°C | Voltage: 6 ppm/°C, 125 µV/°C Current: 30 ppm/°C, 630 µA/°C |
| Module error | Voltage: 0.15% of range Current: 0.3% of range | Voltage: 0.1% of range Current: 0.2% of range |
| Module scan time | 12 ms floating point 8 ms integer | |
| Data format | Integer mode (left justified, 2 s complement) IEEE 32-bit floating point | |
| Module conversion method | R-Ladder DAC, monotonicity with no missing codes | |
| Isolation voltage | 250V (continuous), Reinforced insulation type, Output Channels to Backplane No isolation between individual Output Channels | 250V (continuous), Basic ⁽¹⁾ insulation type, Output Channels to Backplane No isolation between individual Output Channels |
| Module keying | Electronic, software configurable | |
| Removable terminal block | 1756-TBNH 1756-TBSH | |
| RTB keying | User-defined mechanical | |
| Slot width | 1 | |
| Wire size | 1756-TBNH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded copper wire, rated at 105 °C (221 °F) or greater, 1.2 mm (3/64 in.) insulation max. Do not wire more than one conductor on any terminal. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire, rated at 105 °C (221 °F) or greater, 1.2 mm (3/64 in.) insulation max. Do not wire more than two conductors on any terminal. 1756-TBSH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire, rated at 105 °C (221 °F) or greater, 1.2 mm (3/64 in.) insulation max. Do not wire more than one conductor on any terminal. | |
| Terminal block torque specs | 1756-TBNH: 1.36 N•m (12 lb•in) | |
| Wiring category ⁽²⁾ | 1 - on signal ports | |
| Enclosure type | None (open-style) | |
| Temperature code | T4 | |

(1) Series A modules were specified to Reinforced Insulation based on UL508 terminology. Series B modules are type-tested to the same Dielectric strength voltage as series A modules but use updated terminology based on IEC 61010-1, Basic Insulation.

(2) Use this conductor category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-OF4/A, 1756-OF4K/A | 1756-OF4/B, 1756-OF4K/B |
|--|--|---|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Variation of Temperature) | 0 °C < Ta < 60 °C (+32 °F < Ta < +140 °F) | Chassis Series C 0 °C < Ta < 60 °C (32 °F < Ta < 140 °F) Chassis Series B 0 °C < Ta < 55 °C (32 °F < Ta < 131 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) | |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) | |
| Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Damp Heat) | 5...95% noncondensing | |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz | |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g | |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g | 30 g |
| Emissions | IEC 61000-6-4 | |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges | |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz | 10V/m with 1 kHz sine wave 80% AM from 80...6000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5/100 kHz on signal ports | |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports | |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...100 MHz |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-OF4/A, 1756-OF4K/A | 1756-OF4/B, 1756-OF4K/B |
|---|--|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. | |
| FM | FM Approved Equipment for use in Class I Division 2 Group A, B, C, D Hazardous Locations | |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: <ul style="list-style-type: none"> EN 61131-2; Programmable Controllers (Clause 11) | |
| RCM | Australian Radiocommunications Act, compliant with: <ul style="list-style-type: none"> EN 61000-6-4; Industrial Emissions | |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN 60079-0; General Requirements EN 60079-15; Potentially Explosive Atmospheres, Protection "n" II 3 G Ex nA IIC T4 Gc DEMKO15ATEX1482X | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0; General Requirements EN IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc UL 22 ATEX 2772X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0; General Requirements IEC 60079-15; Potentially Explosive Atmospheres, Protection "n" II 3 G Ex nA IIC T4 Gc IECEX UL 15.0053X | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0; General Requirements IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0039X |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: <ul style="list-style-type: none"> Article 58-2 of Radio Waves Act, Clause 3 | |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation | |
| UKex | N/A | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2499X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| UKCA | N/A | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | N/A | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | N/A | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.


1756-OF8, 1756-OF8K

ControlLogix voltage/current output analog module

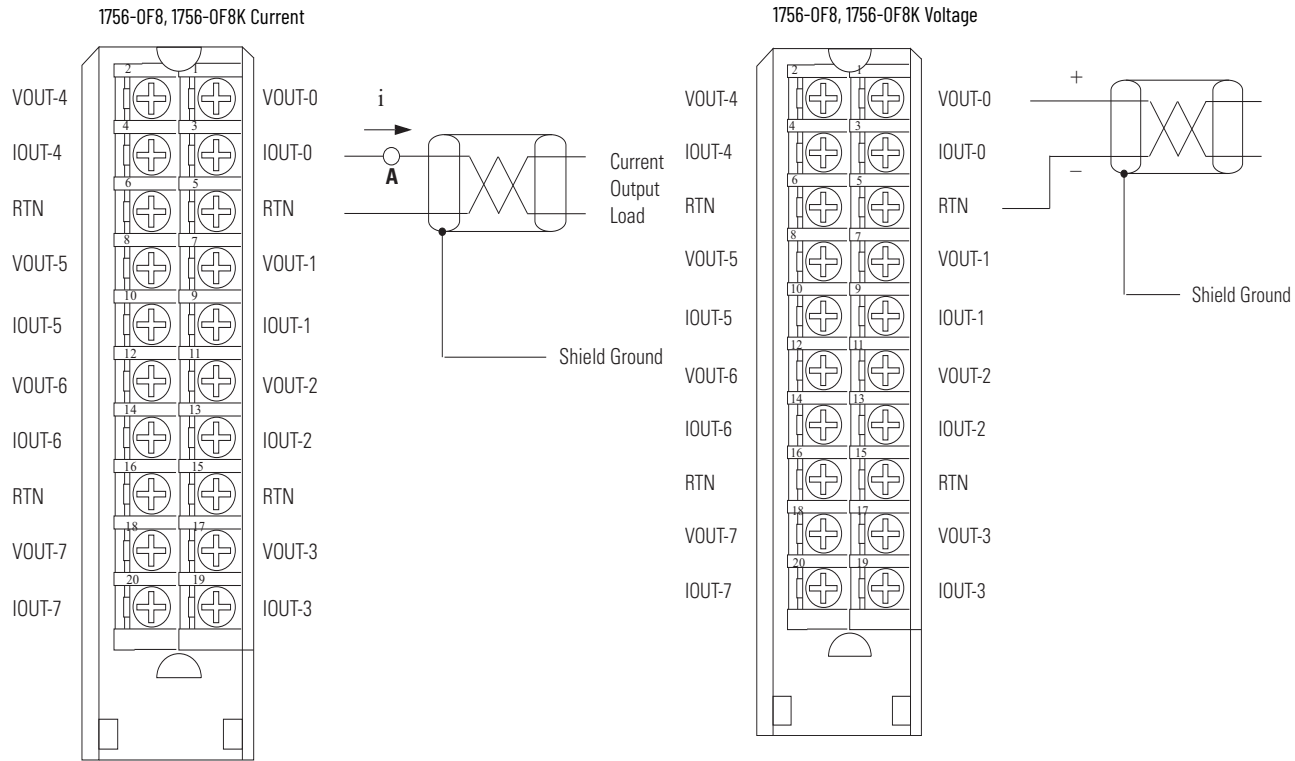

- Place additional loop devices (such as strip chart recorders) at the A location noted in the drawing.
- All terminals marked RTN are connected internally.

All terminals marked RTN are connected internally.

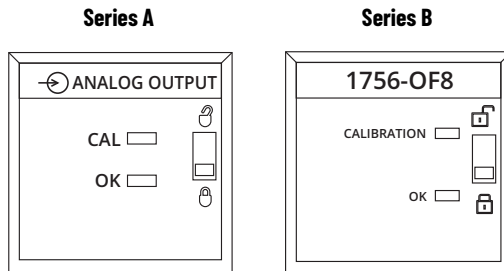

Signal and User Counts

| Range | Low Signal and User Counts | High Signal and User Counts |
|-----------|-----------------------------|-----------------------------|
| 0...20 mA | 0 mA -32,768 counts | 21.2916 mA 32,767 counts |
| ±10V | -10.4336V -32,768 counts | 10.4336V 32,767 counts |

Technical Specifications

| Attribute | 1756-OF8/A, 1756-OF8K/A | 1756-OF8/B, 1756-OF8K/B |
|-------------------------------------|--|--|
| Outputs | Eight voltages or current | |
| Output range | ± 10V 0...20 mA | |
| Resolution | Voltage: 15 bits across 10.5V - 320 µV/bit Current: 16 bits across 21 mA - 325 nA/bit | |
| Current draw @ 5.1V | 150 mA | 200 mA |
| Current draw @ 24V | 210 mA | 300 mA |
| Total backplane power | 5.8 W | 8.22 W |
| Voltage and current ratings | Backplane: 5.1V DC, 150 mA max; 24V DC, 210 mA max Output Voltage: -10...+10V Output Current: 0...20mA | Backplane: 5.1V DC, 200 mA max; 24V DC, 300 mA max Output Voltage: -10...+10V Output Current: 0...20mA |
| Power dissipation | 5.8 W; 0...750 ohm loads | 8.22...2 W; 0...750 ohm loads |
| Thermal dissipation | 16.78 BTU/hr | 28.03 BTU/hr |
| Open circuit detection | Current output only (Output must be set to >0.1 mA) | |
| Overvoltage protection | 24V DC | ± 24V DC |
| Short circuit protection | Electronically current limited to 21 mA or less | |
| Drive capability | Voltage: > 2000 Ω Current: 0...750 Ω | |
| Settling time | < 2 ms to 95% of final value with resistive loads | |
| Calibrated accuracy @ 25 °C (77 °F) | Better than 0.05% of range from 0...21 mA, -10.4...10.4V | |
| Calibration interval | 12 months typical | N/A |
| Offset drift | 50 µV/°C 100 nA/°C | 20 µV/°C 80 nA/°C |
| Gain drift with temperature, max | Voltage: 25 ppm/°C, 520 µV/°C Current: 50 ppm/°C, 1050 µA/°C | Voltage: 6 ppm/°C, 125 µV/°C Current: 30 ppm/°C, 630 µA/°C |
| Module error | Voltage: 0.15% of range Current: 0.3% of range | Voltage: 0.1% of range Current: 0.2% of range |
| Module scan time, min | 12 ms floating point 8 ms integer | |
| Data format | Integer mode (left justified, 2 s complement) IEEE 32-bit floating point | |
| Module conversion method | R-Ladder DAC, monotonicity with no missing codes | |
| Isolation voltage | 250V (continuous), Reinforced insulation type, Output Channels to Backplane No isolation between individual Output Channels | 250V (continuous), Basic ⁽¹⁾ insulation type, Output Channels to Backplane No isolation between individual Output Channels |
| Module keying | Electronic, software configurable | |
| Removable terminal block | 1756-TBNH 1756-TBSH | |
| RTB keying | User-defined mechanical | |
| Slot width | 1 | |
| Wire size | 1756-TBNH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded copper wire, rated at 105 °C (221 °F) or greater, 1.2 mm (3/64 in.) insulation max. Do not wire more than one conductor on any terminal. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire, rated at 105 °C (221 °F) or greater, 1.2 mm (3/64 in.) insulation max. Do not wire more than two conductors on any terminal 1756-TBSH Single wire connection, 0.33...2.1 mm ² (22...14 AWG) solid, or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Do not wire multiple conductors on any terminal | |
| Terminal block torque specs | 1756-TBNH: 1.36 N•m (12 lb•in) | |
| Wiring category ⁽²⁾ | 1 - on signal ports | |
| Enclosure type | None (open-style) | |
| Temperature code | T4 | |

(1) Series A modules were specified to Reinforced Insulation based on UL508 terminology. Series B modules are type-tested to the same Dielectric strength voltage as series A modules but use updated terminology based on IEC 61010-1, Basic Insulation.

(2) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-OF8/A, 1756-OF8K/A | 1756-OF8/B, 1756-OF8K/B |
|--|--|---|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0 °C < Ta < +60 °C (+32 °F < Ta < +140 °F) | Series C Chassis: 0 °C < Ta < 60 °C (32 °F < Ta < 140 °F) Series B Chassis: 0 °C < Ta < 55 °C (32 °F < Ta < 131 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) | Series C Chassis: 60 °C (140 °F) Series B Chassis: 55 °C (131 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) | |
| Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Damp Heat) | 5...95% noncondensing | |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz | |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g | |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g | 30 g |
| Emissions | IEC 61000-6-4 | |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges | |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz | 10V/m with 1 kHz sine wave 80% AM from 80...6000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5/100 kHz on signal ports | |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports | |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...100 MHz | |

Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-OF8/A, 1756-OF8K/A | 1756-OF8/B, 1756-OF8K/B |
|---|--|--|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. | |
| FM | FM Approved Equipment for use in Class I Division 2 Group A, B, C, D Hazardous Locations | |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> • EN 61326-1; Meas./Control/Lab., Industrial Requirements • EN 61000-6-2; Industrial Immunity • EN 61000-6-4; Industrial Emissions • EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) | |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions | |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> • EN 60079-0; General Requirements • EN 60079-15; Potentially Explosive Atmospheres, Protection "n" • II 3 G Ex nA IIC T4 Gc • DEMK015ATEX1482X | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> • EN IEC 60079-0; General Requirements • EN IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" • II 3 G Ex ec IIC T4 Gc • UL 22 ATEX 2772X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> • IEC 60079-0; General Requirements • IEC 60079-15; Potentially Explosive Atmospheres, Protection "n" • II 3 G Ex nA IIC T4 Gc • IECEX UL 15.0053X | IECEX System, compliant with: <ul style="list-style-type: none"> • IEC 60079-0; General Requirements • IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" • II 3 G Ex ec IIC T4 Gc • IECEX UL 22.0039X |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 | |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation | |
| UKex | N/A | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> • Schedule 1 of the UKEX Regulation 2016 No. 1107 • Equipment protection by increased safety "e", reference certificate number UL22UKEX2499X • Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| UKCA | N/A | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> • 2016 No. 1091, Electromagnetic Compatibility Regulations • 2016 No. 1101, Electrical Equipment (Safety) Regulations • 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations • 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | N/A | In conformity with the following regulations: <ul style="list-style-type: none"> • Arrêté ministériel n° 6404-15 du 1 er muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension • Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | N/A | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |


(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-OF8I, 1756-OF8IK

ControlLogix isolated voltage/current output analog module.



1756-OF8I, 1756-OF8IK Module Wiring Diagram - Current Mode

- IMPORTANT:** Remember the following:
- If separate power sources are used, do not exceed the specific isolation voltage as listed in the specifications.
 - Place additional devices anywhere in the loop.

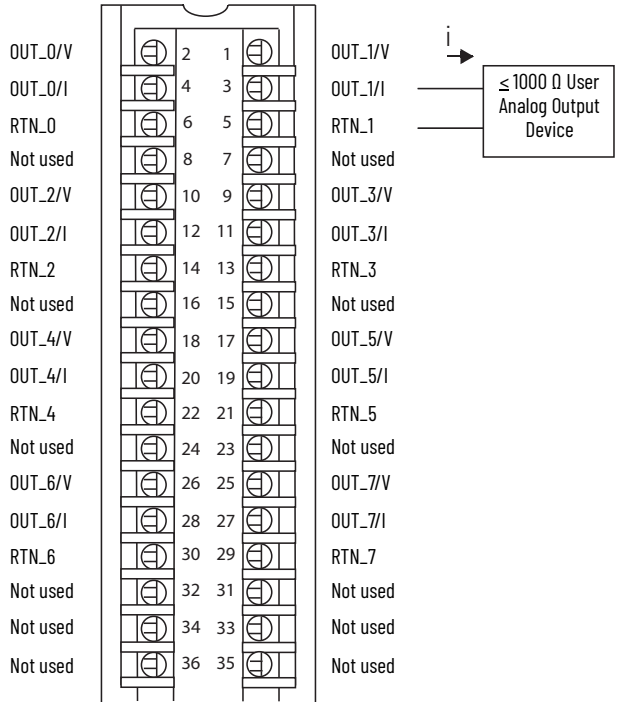

1756-OF8I, 1756-OF8IK Module Wiring Diagram - Voltage Mode

- IMPORTANT:** Remember the following:
- If separate power sources are used, do not exceed the specific isolation voltage as listed in the specifications.
 - Place additional devices anywhere in the loop.

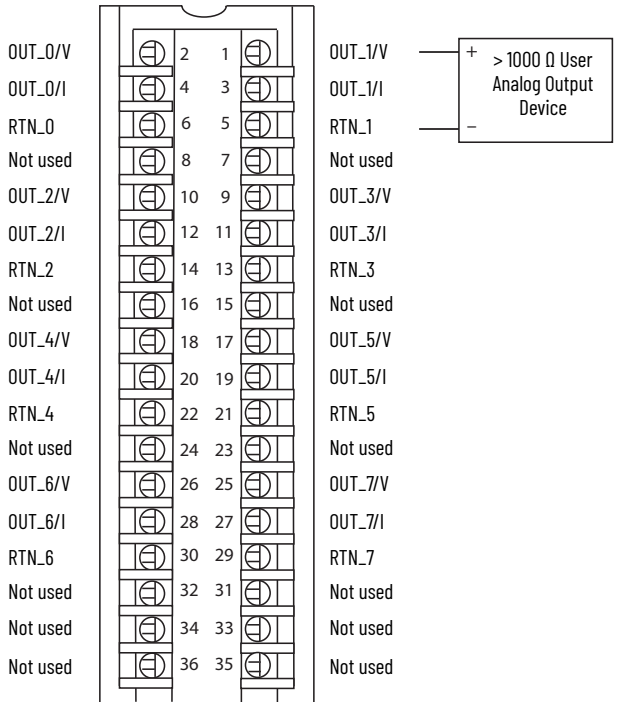

Technical Specifications

| Attribute | 1756-OF8I, 1756-OF8IK |
|--|--|
| Outputs | Eight isolated channels - Any combination of voltage or current mode |
| Output range | -10...10V 0...10V 0...5V 0...20 mA |
| Resolution | 16-bit ±10.5V (0.32 mV/count) 0...10.5V (0.16 mV/count) 0...5.25V (0.08 mV/count) 0...21 mA (0.32 µA/count) |
| Current draw @ 5.1V | 200 mA |
| Current draw @ 24V | Voltage or Current mode with 250 Ω loads = 220 mA Current mode with 500 Ω loads = 275 mA Current mode with 750 Ω loads = 340 mA Current mode with 1000 Ω loads = 385 mA |
| Total backplane power | Voltage mode = 6.3 W Current mode with 250 Ω loads = 6.3 W Current mode with 500 Ω loads = 7.6 W Current mode with 750 Ω loads = 9.2 W Current mode with 1000 Ω loads = 10.2 W |
| Power dissipation | Voltage mode: 5.4 W (18.4 BTU/hr) Current mode with 250 Ω loads: 5.4 W (18.4 BTU/hr) Current mode with 500 Ω loads: 5.8 W (19.8 BTU/hr) Current mode with 750 Ω loads: 6.5 W (22.2 BTU/hr) Current mode with 1000 Ω loads: 6.7 W (22.9 BTU/hr) |
| Thermal dissipation | Voltage mode = 18.4 BTU/hr Current mode with 250 Ω loads = 18.4 BTU/hr Current mode with 500 Ω loads = 19.8 BTU/hr Current mode with 750 Ω loads = 22.2 BTU/hr Current mode with 1000 Ω loads = 22.9 BTU/hr |
| Output impedance | 46 Ω (Current output) |
| Open circuit detection | Current output = Yes |
| Short circuit detection | Voltage output = Yes |
| Overvoltage protection | ±30V DC (voltage/current) |
| Drive capability | Current output = 0...1000 Ω Voltage output = >1000 Ω |
| Settling time | < 2 ms to 95% of final value with Resistive loads |
| Calibrated accuracy @ 25 °C (77 °F) | 0.05% |
| Module error over full temperature range | 0.1% |
| Module scan time, min | 1 ms |
| Data format | IEEE 32-bit floating point |
| Module conversion method | R-Ladder DAC, monotonicity with no missing codes |
| Isolation voltage | 250V (continuous), reinforced insulation type, outputs to backplane 250V (continuous), basic insulation type, output to output |
| Module keying | Electronic, software configurable |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire size | 1756-TBCH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Do not wire more than one conductor on any single terminal. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Do not wire more than two conductors on any single terminal. 1756-TBS6H Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Do not wire more than one conductor on any single terminal. |

Technical Specifications (Continued)

| Attribute | 1756-OF81, 1756-OF81K |
|------------------------------|-----------------------|
| Wire category ⁽¹⁾ | 2 - on signal ports |
| Enclosure type | None (open-style) |
| Temperature code | T4 |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-OF81, 1756-OF81K |
|--|---|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | Series B ±8 kV contact discharges ±8 kV air discharges Series A 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | Series B 20V/m with 1 kHz sine wave 80% AM from 80...1000 MHz 10V/m with 1 kHz sine wave 80% AM from 1000...2000 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...6000 MHz Series A 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | Series B ±4 kV at 5 kHz and 100 kHz on shielded signal ports Series A ±4 kV at 5 kHz on shielded signal ports |
| Surge transient immunity IEC 61000-4-5 | ±2 kV line-earth (CM) on shielded signal ports |
| Conducted RF immunity IEC 61000-4-6 | Series B 20V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz Series A 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-OF8I, 1756-OF8IK |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0 Edition 7; General Requirements EN IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc UL 22 ATEX 2772X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0 Edition 7; General Requirements IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0039X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2499X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1 er muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 202012230911830, 202012230911998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IF8H, 1756-IF8HK

ControlLogix® voltage/current analog input module with HART protocol

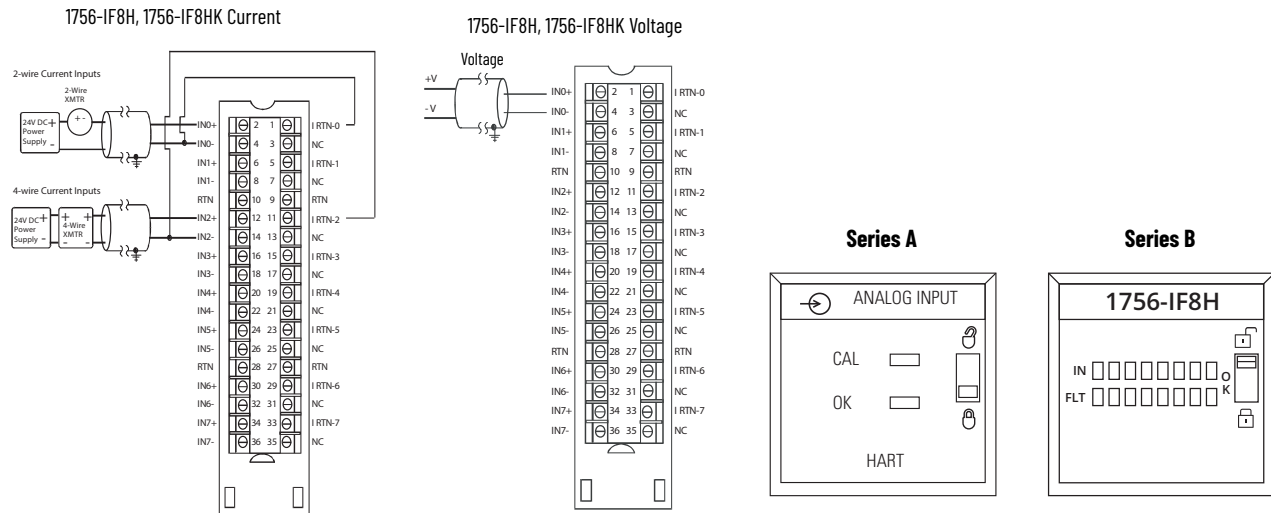

Technical Specifications

| Attribute | 1756-IF8H/A, 1756-IF8HK/A | 1756-IF8H/B, 1756-IF8HK/B |
|-----------------------------|---|--|
| Inputs | Eight differential voltage or current inputs, one HART modem per module | Eight differential voltage or current inputs, one HART modem per channel |
| Input range | ±10V 0...5V 1...5V 0...10V 0...20 mA 4...20 mA | |
| Resolution | 16...21 bits | |
| Voltage and current ratings | Backplane: 5.1V DC, 300 mA, 24V DC, 135 mA Input voltage range: -10...+10V Input current range: 0...20 mA, 4...20mA | Backplane: 5.1V DC, 230 mA, 24V DC, 80 mA Input voltage range: -10...+10V Input current range: 0...20 mA, 4...20mA |
| Total backplane power | 4.77 W | 3.1 W |
| Power dissipation | Voltage: 3.21 W Current: 4.01 W | Voltage: 2.76 W Current: 3.56 W |
| Thermal dissipation | Voltage: 11.0 BTU/hr Current: 13.7 BTU/hr | |
| Input impedance | - | |
| Open circuit detection time | Positive full-scale reading within 5 s | |
| Overvoltage protection, max | Voltage: 30V DC Current: 8V DC | |
| Normal mode noise rejection | > 80 dB @ 50/60 Hz | |
| Common mode noise rejection | > 100 dB @ 50/60 Hz | |
| Calibrated accuracy | Voltage: Better than 0.05% of range Current: Better than 0.15% of range | |
| Calibration interval | 12 months | |
| Offset drift | 90 μV/°C | |

Technical Specifications (Continued)

| Attribute | 1756-IF8H/A, 1756-IF8HK/A | 1756-IF8H/B, 1756-IF8HK/B |
|------------------------------|---|---|
| Gain drift with temperature | Voltage: 10 ppm/°C Current: 20 ppm/°C | |
| Module error | Voltage: 0.1% of range Current: 0.3% of range | |
| Module I/O scan time | Analog: 18...488 ms (filter dependent) | Analog: 18...488 ms (filter dependent) |
| Module HART scan time | Typically 1 s per HART channel enabled Estimate 10 s if all 8 channels have HART enabled Pass through messages, handheld communicators, secondary masters, communication errors, or configuration changes can significantly increase the update time | Estimate 1 s if all 8 channels have HART enabled (scan time does not increase with enabling additional channels because one HART modem is assigned per channel.) Pass through messages, handheld communicators, secondary masters, communication errors, or configuration changes can significantly increase the update time |
| Data format | IEEE 32-bit floating point | |
| Input conversion method | Sigma-Delta | |
| Isolation voltage | 50V (continuous), Basic insulation type, input channels to backplane No isolation between individual input channels | 250V (continuous), Reinforced Insulation Type, inputs to backplane. Basic Insulation Type, inputs to ground. |
| Module keying | Electronic, software configurable | |
| Removable terminal block | 1756-TBCH 1756-TBS6H | |
| RTB keying | User-defined mechanical | |
| Slot width | 1 | |
| Wire size | 1756-TBCH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. 1756-TBS6H Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. | |
| Terminal block torque specs | 1756-TBCH 0.5 N•m (4.4 lb•in) | |
| Wire category ⁽¹⁾ | 2 - on signal ports | |
| Wire type | Copper | |
| Enclosure type rating | None (open-style) | |
| Temperature code | T4 | |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IF8H/A, 1756-IF8HK/A | 1756-IF8H/B, 1756-IF8HK/B |
|--|--|---------------------------|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0 °C ≤ Ta ≤ +60 °C (+32 °F ≤ Ta ≤ +140 °F) | |
| Temperature, surrounding air, max | 60 °C (140 °F) | |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) | |
| Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Damp Heat) | 5...95% noncondensing | |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz | |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g | |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g | |
| Emissions | IEC 61000-6-4 | |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges | |

Environmental Specifications (Continued)

| Attribute | 1756-IF8H/A, 1756-IF8HK/A | 1756-IF8H/B, 1756-IF8HK/B |
|---|--|---|
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 1V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 10V/m with 1 kHz sine wave 80% AM from 2000...6000 MHz |
| EFT/B immunity IEC 61000-4-4 | ±2 kV at 5 kHz on signal ports | |
| Surge transient immunity IEC 61000-4-5 | ±2 kV line-earth (CM) on shielded ports | |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz | |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IF8H, 1756-IF8HK |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN 60079-0; General Requirements EN 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc UL 20 ATEX 2408X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0; General Requirements IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc IECEX UL 20.0084X |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2489X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 2020122309113918, 2020122309113919 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IF8IH, 1756-IF8IHK

ControlLogix isolated current analog input module with HART protocol

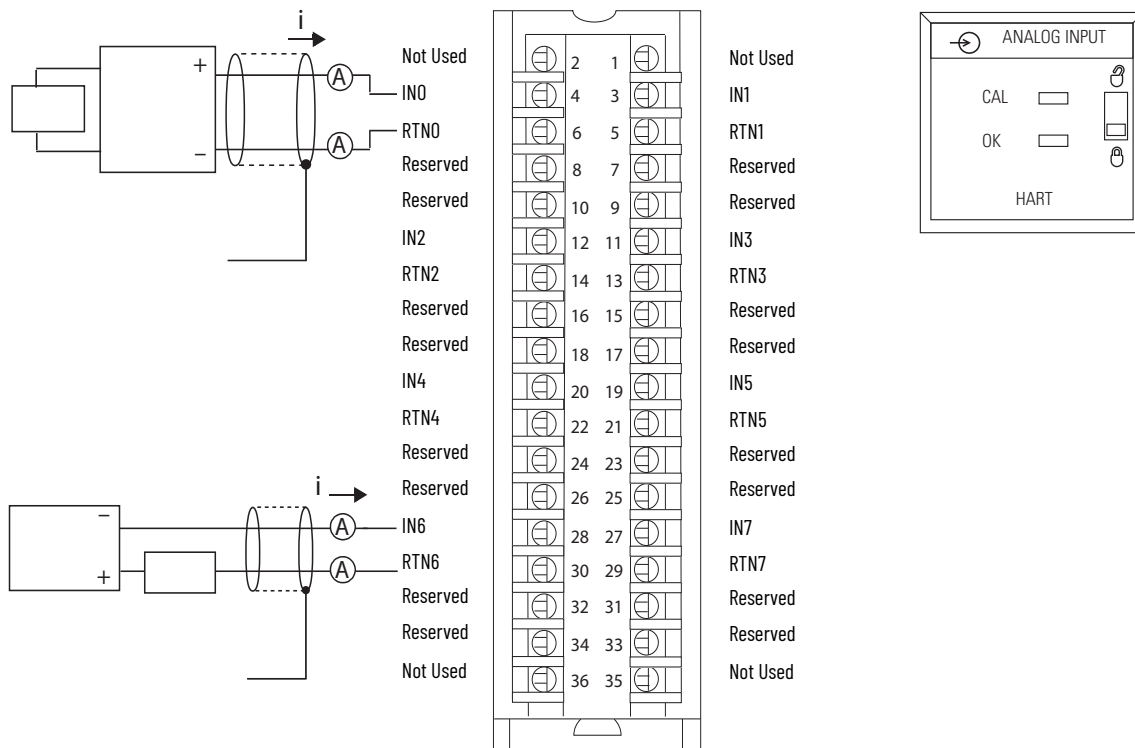

Technical Specifications

| Attribute | 1756-IF8IH, 1756-IF8IHK |
|---|--|
| Inputs | Eight current inputs |
| Input range | 0...20 mA (0...20.58 mA) 4...20 mA (3.42...20.58 mA) |
| Resolution | 16...21 bits |
| Voltage and current ratings | Backplane: 210 mA @ 5.1V DC, 110 mA @ 24V DC Input voltage range: 5...30V DC Input current range: 0...20 mA, 4...20 mA |
| Power dissipation within module | 4 W |
| Inrush current | 400 mA @ 5V 450 mA @ 24V |
| Isolation voltage | 250V (continuous) Reinforced Insulation Type, inputs to backplane. Basic Insulation Type, input to input, and inputs to ground. |
| Input impedance | 250 Ω ±5 Ω |
| Open circuit detection time | 5 s (4...20 mA range only) |
| Input overvoltage protection | +28.8V DC |
| Normal mode noise rejection | > 90 dB @ 50 Hz and 60 Hz with 10 Hz filter > 74 dB @ 50 Hz and 60 Hz with 15 Hz filter > 33 dB @ 50 Hz and > 90 dB @ 60 Hz with 20 Hz filter |
| Common mode noise rejection | > 90 dB @ 50 Hz and 60 Hz (10 Hz, 15 Hz, or 20 Hz filters only) |
| Calibrated accuracy at 25 °C with HART disabled | 0.15...1.5% of full-scale, filter dependent |
| Calibrated accuracy at 25 °C with HART enabled | 1.5% of full-scale with 250 Hz filter 0.5% of full-scale with 100 Hz filter 0.2% of full-scale with 50 Hz or 60 Hz filter 0.15% of full-scale with 15 Hz or 20 Hz filter Monotonicity not guaranteed |

Technical Specifications (Continued)

| Attribute | 1756-IF8IH, 1756-IF8IHK |
|---|---|
| Calibrated accuracy over full temperature range with HART enabled | 1.8% of full-scale with 250 Hz filter 0.8% of full-scale with 100 Hz filter 0.5% of full-scale with 50 Hz or 60 Hz filter 0.4% of full-scale with 15 Hz or 20 Hz filter Monotonicity not guaranteed |
| Calibration interval | 12 months typical |
| Input offset drift with temperature | ≤ 300 µA/°C |
| Gain drift with temperature | 20 ppm/°C |
| Module error over full temperature range with HART disabled | 0.3% of range (all filters) |
| Module I/O scan time | Analog: 15...488 ms (filter dependent) |
| Module HART scan time | Estimate 1 s if all 8 channels have HART enabled (scan time does not increase with enabling additional channels because one HART modem is assigned per channel.) Pass through messages, handheld communicators, secondary masters, communication errors, or configuration changes can significantly increase the update time |
| Data format | 32-bit floating point |
| Input conversion method | Sigma-Delta ADC (24-bit converter) |
| Module keying | Electronic, software configurable |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire Size | 1756-TBCH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. 1756-TBS6H Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. |
| Terminal block torque specs | 1756-TBCH 0.4 N•m (4. 4 lb•in) |
| Wire category | 2 - on signal ports ⁽¹⁾ |
| Wire type | Copper |
| Enclosure type | None (open-style) |
| North American temperature code | T5 |
| ATEX temperature code | T4 |
| IECEX temperature code | T4 |

(1) Use this conductor category information for planning conductor routing. See Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IF8IH, 1756-IF8IHK |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0 °C < Ta < +60 °C (+32 °F < Ta < +140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |

Environmental Specifications (Continued)

| Attribute | 1756-IF8IH, 1756-IF8IHK |
|---|---|
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 10V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±2 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±2 kV line-earth (CM) on shielded ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IF8IH, 1756-IF8IHK |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN 60079-0; General Requirements EN 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc UL 20 ATEX 2408X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0; General Requirements IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc IECEX UL 20.0084X |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2489X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1 er muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 2020122309113918, 2020122309113919 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IF16H, 1756-IF16HK

ControlLogix current analog input module with HART protocol

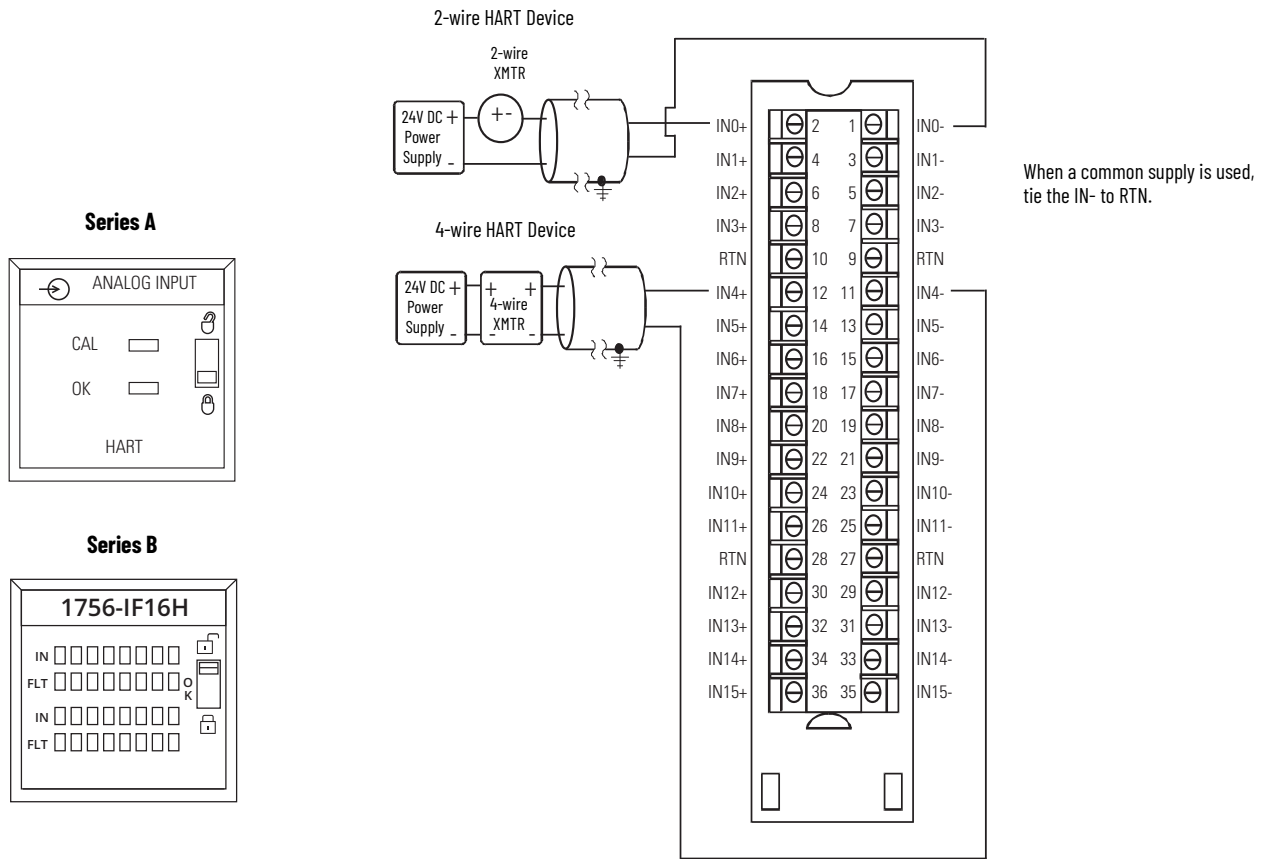

Technical Specifications

| Attribute | 1756-IF16H/A, 1756-IF16HK/A | 1756-IF16H/B, 1756-IF16HK/B |
|-----------------------------|--|---|
| Inputs | Sixteen differential, current Dedicated HART modem per channel | |
| Input range | 0...20 mA 4...20 mA | |
| Resolution | 16...21 bits | |
| Voltage and current ratings | Backplane: 5.1V DC @ 200 mA, 24V DC @ 125 mA Input current range: 0...20 mA, 4...20 mA | Backplane: 5.1V DC @ 230 mA, 24V DC @ 100 mA Input current range: 0...20 mA, 4...20 mA |
| Total backplane power | 4.02 W | 3.58 W |
| Power dissipation, max | 6 W | 5.4 W |
| Isolation voltage | 50V (continuous), Basic insulation type, Input Channels to Backplane No isolation between individual Input Channels | 250V (continuous), Reinforced Insulation Type, inputs to backplane. Basic Insulation Type inputs to ground. |
| Thermal dissipation | 12 BTU/hr | |
| Input impedance | 249 Ω | |
| Open circuit detection time | Positive full-scale reading within 5 s | |
| Overvoltage protection, max | 8V DC | |
| Normal mode noise rejection | 74 dB @ 50/60 Hz (15 Hz filter) 90 dB @ 60 Hz (20 Hz filter) | |
| Common mode noise rejection | > 90 dB @ 50/60 Hz (15 Hz and 20 Hz filters only) | |
| Repeatability | Better than 0.01% of range (15 Hz and 20 Hz filters only) | |
| Calibrated accuracy | Better than 0.13% of range (all filters) | |
| Calibration interval | 12 months typical | |

Technical Specifications (Continued)

| Attribute | 1756-IF16H/A, 1756-IF16HK/A | 1756-IF16H/B, 1756-IF16HK/B |
|------------------------------|--|-----------------------------|
| Offset drift | 27 $\mu\text{V}/^\circ\text{C}$ | 15PPM/C |
| Gain drift with temperature | 11 ppm/ $^\circ\text{C}$ | |
| Module error | 0.3% of range | |
| Module I/O scan time | Analog: 11...328 ms (filter dependent) | |
| Module HART scan time | Estimate 1 s if all 16 channels have HART enabled (scan time does not increase with enabling additional channels because one HART modem is assigned per channel.) Pass through messages, handheld communicators, secondary masters, communication errors, or configuration changes can significantly increase the update time | |
| Data format | IEEE 32-bit floating point | |
| Input conversion method | Sigma-Delta | |
| Module keying | Electronic, software configurable | |
| Removable terminal block | 1756-TBCH 1756-TBS6H | |
| RTB keying | User-defined mechanical | |
| Slot width | 1 | |
| Wire size | 1756-TBCH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 $^\circ\text{C}$ (221 $^\circ\text{F}$), or greater, 1.2 mm (3/64 in.) insulation max. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 $^\circ\text{C}$ (221 $^\circ\text{F}$), or greater, 1.2 mm (3/64 in.) insulation max. 1756-TBS6H Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 $^\circ\text{C}$ (221 $^\circ\text{F}$), or greater, 1.2 mm (3/64 in.) insulation max. | |
| Terminal block torque spec | 1756-TBCH 0.5 N•m (4.4 lb•in) | |
| Wire category ⁽¹⁾ | 2 - on signal ports | |
| Wire type | Copper | |
| Enclosure type rating | None (open-style) | |
| Temperature code | T4 | |

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IF16H/A, 1756-IF16HK/A | 1756-IF16H/B, 1756-IF16HK/B |
|--|--|---|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0 $^\circ\text{C}$ \leq Ta \leq +60 $^\circ\text{C}$ (+32 $^\circ\text{F}$ \leq Ta \leq +140 $^\circ\text{F}$) | |
| Temperature, surrounding air, max | 60 $^\circ\text{C}$ (140 $^\circ\text{F}$) | |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 $^\circ\text{C}$ (-40...+185 $^\circ\text{F}$) | |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing | |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz | |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g | |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock): | 50 g | |
| Emissions | IEC 61000-6-4 | |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges | |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 1V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 10V/m with 1 kHz sine wave 80% AM from 2000...6000 MHz |

Environmental Specifications (Continued)

| Attribute | 1756-IF16H/A, 1756-IF16HK/A | 1756-IF16H/B, 1756-IF16HK/B |
|---|---|-----------------------------|
| EFT/B immunity IEC 61000-4-4 | ±2 kV at 5 kHz on signal ports | |
| Surge transient immunity IEC 61000-4-5 | ±2 kV line-earth (CM) on shielded ports | |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz | |



Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IF16H, 1756-IF16HK |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN 60079-0; General Requirements EN 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc UL 20 ATEX 2408X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0; General Requirements IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc IECEX UL 20.0084X |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2489X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 2020122309113918, 2020122309113919 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-IF16IH, 1756-IF16IHK

ControlLogix current analog input module with HART protocol

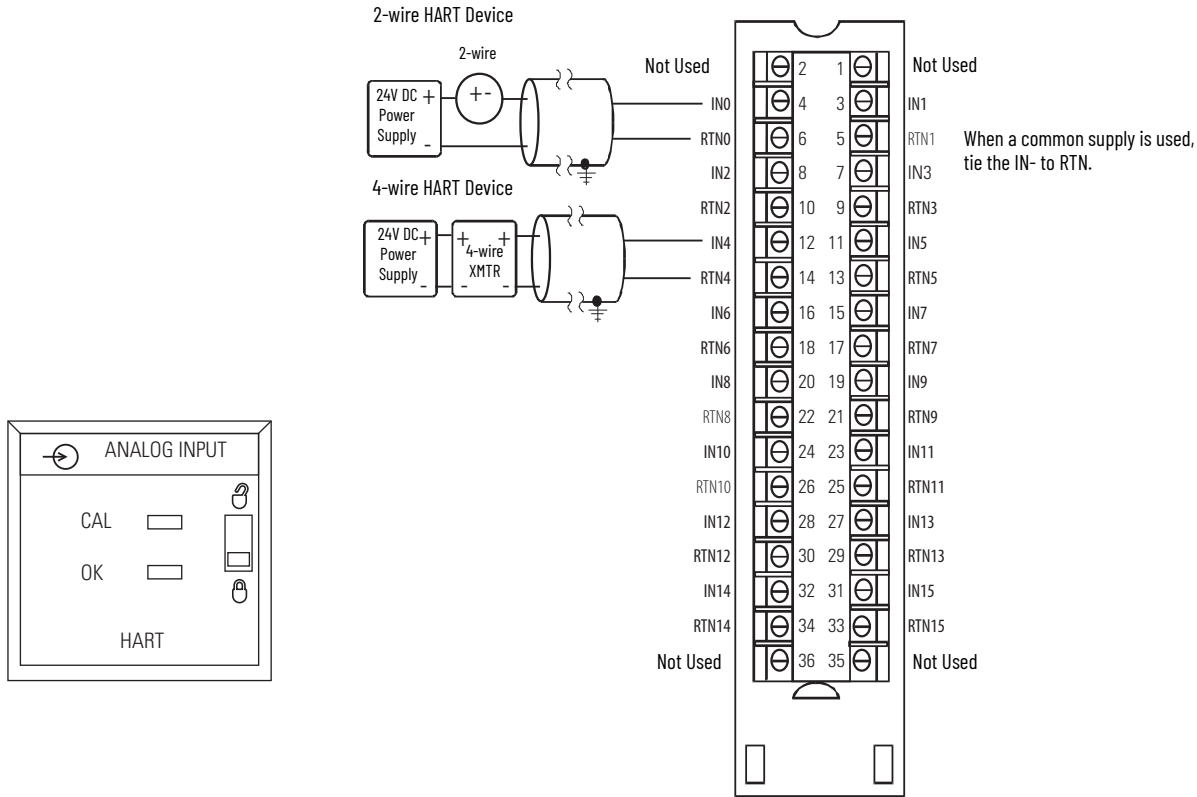

Technical Specifications

| Attribute | 1756-IF16IH, 1756-IF16IHK |
|---|--|
| Voltage and current ratings | Backplane: 225 mA @ 5.1V DC, 200 mA @ 24V DC 16 Inputs Input current range: 0...20 mA, 4...20 mA |
| Resolution | 16...21 bits |
| Power dissipation | 5.30 W |
| Inrush current | 400 mA @ 5.1V DC 450 mA @ 24V DC |
| Isolation voltage | 250V (continuous) Reinforced Insulation Type, inputs to backplane. Basic Insulation Type, input to input, and inputs to ground |
| Input impedance | 250 Ω(±5 Ω) |
| Open circuit detection time | 5 s, 4...20 mA range only |
| Input overvoltage protection | 28.8V DC |
| Normal mode noise rejection | 90 dB @ 50/60 Hz (10 Hz filter) 74 dB @ 50/60 Hz (15 Hz filter) 33 dB @ 60 Hz, 90 dB @ 60 Hz (20 Hz filter) |
| Common mode noise rejection | > 90 dB @ 50/60 Hz (10 Hz, 15 Hz, and 20 Hz filters only) |
| Calibrated accuracy at 25 °C with HART disabled | 0.15...1.5% of full-scale, dependent on selected filter |
| Calibrated accuracy at 25 °C with HART enabled | 1.5% of full-scale with 250 Hz filter 0.5% of full-scale with 100 Hz filter 0.2% of full-scale with 50 Hz or 60 Hz filter 0.15% of full-scale with 15 Hz or 20 Hz filter Monotonicity not guaranteed |
| Calibrated accuracy over full temperature range with HART enabled | 1.8% of full-scale with 250 Hz filter 0.8% of full-scale with 100 Hz filter 0.5% of full-scale with 50 Hz or 60 Hz filter 0.4% of full-scale with 15 Hz or 20 Hz filter Monotonicity not guaranteed |

Technical Specifications (Continued)

| Attribute | 1756-IF16IH, 1756-IF16IHK |
|---|--|
| Calibration interval | 12 months typical |
| Input offset drift with temperature | 300 $\mu\text{A}/^\circ\text{C}$ |
| Gain drift with temperature | 20 ppm/ $^\circ\text{C}$ |
| Module error over full temperature range with HART disabled | 0.3% of range (all filters) |
| Module I/O scan time | Analog: 11...328 ms (filter dependent) |
| Module HART scan time | Estimate 1 s if all 16 channels have HART enabled (scan time does not increase with enabling additional channels because one HART modem is assigned per channel.) Pass through messages, handheld communicators, secondary masters, communication errors, or configuration changes can significantly increase the update time |
| Data format | IEEE 32-bit floating point |
| Input conversion method | Sigma-Delta ADC (24-bit converter) |
| Output conversion method | Sigma-Delta ADC (24-bit converter) |
| Module keying | ASIC does not support module keying |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire size | 1756-TBCH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 $^\circ\text{C}$ (221 $^\circ\text{F}$), or greater, 1.2 mm (3/64 in.) insulation max. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 $^\circ\text{C}$ (221 $^\circ\text{F}$), or greater, 1.2 mm (3/64 in.) insulation max. 1756-TBS6H Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 $^\circ\text{C}$ (221 $^\circ\text{F}$), or greater, 1.2 mm (3/64 in.) insulation max. |
| Terminal block torque specs | 1756-TBCH 0.5 N·m (4.4 lb-in) |
| Wiring category ⁽¹⁾ | 2 - on signal ports |
| Wire type | Copper |
| Enclosure type rating | None (open-style) |
| North American temperature code | T5 |
| ATEX temperature code | T4 |
| IECEx temperature code | T4 |

(1) Use this conductor category information for planning conductor routing. See Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-IF16IH, 1756-IF16IHK |
|--|---|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0 $^\circ\text{C}$ < Ta < +60 $^\circ\text{C}$ (+32 $^\circ\text{F}$ < Ta < +140 $^\circ\text{F}$) |
| Temperature, surrounding air, max | 60 $^\circ\text{C}$ (140 $^\circ\text{F}$) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 $^\circ\text{C}$ (-40...+185 $^\circ\text{F}$) |
| Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |

Environmental Specifications (Continued)

| Attribute | 1756-IF16IH, 1756-IF16IHK |
|---|--|
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...6000 MHz |
| EFT/B immunity IEC 61000-4-4 | ±2 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±2 kV line-earth (CM) on shielded ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-IF16IH, 1756-IF16IHK |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN 60079-0; General Requirements EN 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc UL 20 ATEX 2408X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0; General Requirements IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc IECEX UL 20.0084X |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2489X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 2020122309113918, 2020122309113919 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-OF8H, 1756-OF8HK

ControlLogix voltage/current output analog module with HART protocol

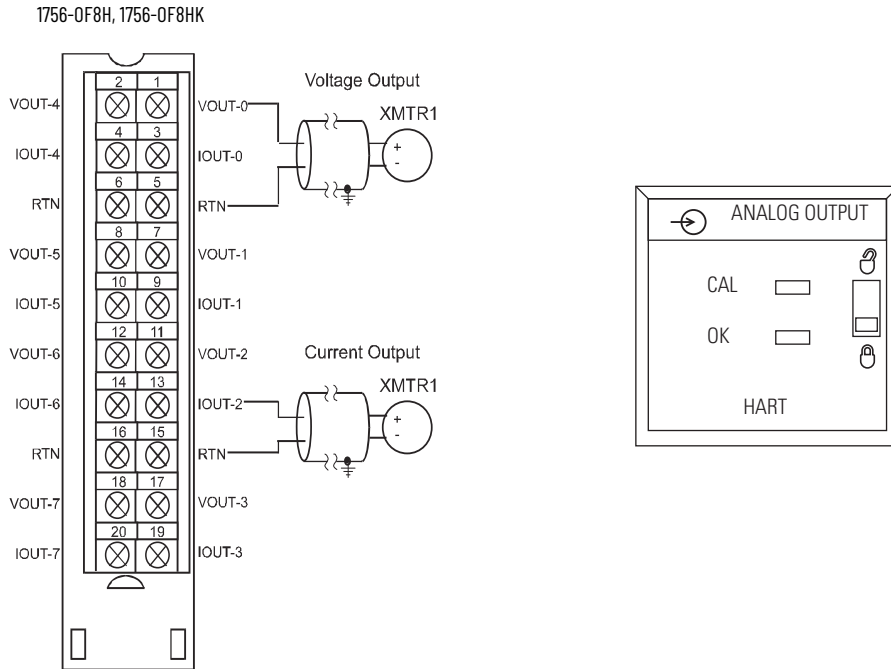

Signal and User Counts

| Range | Low Signal and User Counts | High Signal and User Counts |
|-----------|-----------------------------|-----------------------------|
| 0...20 mA | 0 mA -32,768 counts | 21,2916 mA 32,767 counts |
| ±10V | -10.4336V -32,768 counts | 10.4336V 32,767 counts |

Technical Specifications

| Attribute | 1756-OF8H, 1756-OF8HK |
|-----------------------------|---|
| Outputs | Eight voltages or current, one HART modem per module |
| Output range | ±10V 0...20 mA 4...20 mA |
| Resolution | 15...16 bits for all ranges |
| Voltage and current ratings | Backplane: 5.1V DC, 230 mA, 24V DC, 230 mA Output voltage range: -10...10.4V Output current range: 0...20 mA, 4...20 mA |
| Total backplane power | 6.54 W |
| Power dissipation | 4.92 W |
| Thermal dissipation | 16.78 BTU/hr |
| Isolation voltage | 50V (continuous), Basic insulation type, Output Channels to Backplane No isolation between individual output Channels |
| Output impedance | - |
| Open circuit detection time | Current output only (output must be set to < 0.1 mA) |
| Overvoltage protection, max | ±24V DC |
| Drive capability | - |
| Load reactance, max | Voltage: 1 µF Current: 10 µH |
| Settling time | Current (no HART): < 23 ms to 95% with resistive loads Current (with HART): < 37 ms to 95% with resistive loads Voltage: < 8.5 ms to 95% with resistive loads |

Technical Specifications (Continued)

| Attribute | 1756-OF8H, 1756-OF8HK |
|--|--|
| Calibrated accuracy @ 25 °C (77 °F) with HART disabled | Voltage: Better than 0.1% of range Current: Better than 0.15% of range |
| Calibration interval | 12 months typical |
| Offset drift | 100 $\mu\text{V}/^\circ\text{C}$ typical 200 $\text{nA}/^\circ\text{C}$ typical |
| Gain drift with temperature | Voltage: 20 $\text{ppm}/^\circ\text{C}$ Current: 35 $\text{ppm}/^\circ\text{C}$ |
| Module error | Voltage: 0.15% of range Current: 0.3% of range |
| Module I/O scan time | Analog: 10...750 ms (RPI dependent) |
| Module HART scan time | Typically 1 s per HART channel enabled Estimate 10 s if all 8 channels have HART enabled Pass through messages, handheld communicators, secondary masters, communication errors, or configuration changes can significantly increase the update time |
| Data format | IEEE 32-bit floating point |
| Input conversion method | Successive approximation |
| Output conversion method | R-Ladder DAC, monotonicity with no missing codes |
| Module keying | Electronic, software configurable |
| Removable terminal block | 1756-TBNH 1756-TBSH |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire size | 1756-TBNH Single wire connection: 0.33...2.1 mm^2 (22...14 AWG) solid or stranded shielded copper wire, rated at 105 °C (221 °F) or greater, 1.2 mm (3/64 in.) insulation max. Double wire connection: 0.33...1.3 mm^2 (22...16 AWG) solid or stranded copper wire, rated at 105 °C (221 °F) or greater, 1.2 mm (3/64 in.) insulation max. 1756-TBSH Single wire connection: 0.33...2.1 mm^2 (22...14 AWG) solid or stranded shielded copper wire, rated at 105 °C (221 °F) or greater, 1.2 mm (3/64 in.) insulation max. |
| Terminal block torque specs | 1756-TBNH 1.36 N•m (12 lb-in) |
| Wire category ⁽¹⁾ | 2 - on signal ports |
| Wire type | Copper |
| Enclosure type rating | None (open-style) |
| Temperature code | T4 |

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-OF8H, 1756-OF8HK |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0 °C < Ta < +60 °C (+32 °F < Ta < +140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |

Environmental Specifications (Continued)

| Attribute | 1756-OF8H, 1756-OF8HK |
|---|--|
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 1V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±2 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±2 kV line-earth (CM) on shielded ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-OF8H, 1756-OF8HK |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN 60079-0; General Requirements EN 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc UL 20 ATEX 2408X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0; General Requirements IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc IECEX UL 20.0084X |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2489X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1er muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 2020122309113918, 2020122309113919 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-OF8IH, 1756-OF8IHK

ControlLogix isolated HART current analog output module

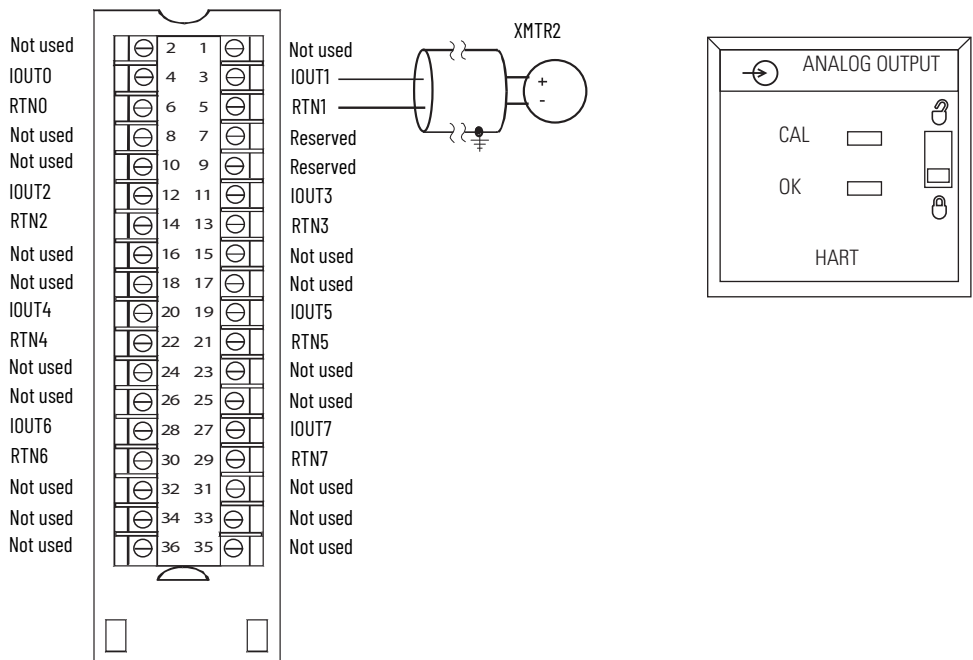

Signal and User Counts

| Range | Low Signal | High Signal |
|-----------|------------|-------------|
| 0...21 mA | 0 mA | 21.2916 mA |

Technical Specifications

| Attribute | 1756-OF8IH, 1756-OF8IHK |
|-------------------------------------|---|
| Outputs | 8 current |
| Output range | 0...20 mA 4...20 mA |
| Resolution | 15 bits across 24 mA, 732 nA per bit |
| Voltage and current ratings | Backplane: 220 mA @ 5.1V DC, 360 mA @ 24V DC Output voltage range: 5...30V DC Output current range: 0...20 mA, 4...20 mA |
| Current draw @ 24V | 400 mA (estimated) |
| Power dissipation, max | 6.5 W nominal (< 6.4 W with 50 Ω load on all channels) (< 6.5 W with 250 Ω load on all channels) (< 6.7 W with 750 Ω load on all channels) |
| Open circuit detection | Current output only (output must be set ≥ 0.1 mA) |
| Overvoltage protection, max | ±24V DC |
| Output short circuit protection | Current electronically limited to ≤ 21 mA with no damage |
| Drive capability | 50...750 Ω with short circuit survival |
| Load reactance, max | 10 μH |
| Settling time | HART not enabled: < 23 ms to 95% with resistive loads HART enabled: < 100 ms to 95% with resistive loads |
| Calibrated accuracy @ 25 °C (77 °F) | 0.15% @ 4...20 mA |
| Calibration interval | 12 months typical |
| Offset drift | ±3 ppm of full-scale range/°C (72 nA/°C typical) |
| Gain drift with temperature | ±4 ppm of full-scale range/°C |
| Module error | 0.3% @ 4...20 mA |
| Module I/O scan time | Analog: 11...750 ms (RPI dependent) |

Technical Specifications (Continued)

| Attribute | 1756-OF8IH, 1756-OF8IHK |
|--------------------------------|---|
| Module HART scan time | Estimate 1 s if all 8 channels have HART enabled (scan time does not increase with enabling additional channels because one HART modem is assigned per channel.) Pass through messages, handheld communicators, secondary masters, communication errors, or configuration changes can significantly increase the update time |
| Data format | IEEE 32-bit floating point |
| Output conversion method | R-Ladder DAC |
| Isolation voltage | 250V (continuous) Reinforced Insulation Type, outputs to backplane. Basic Insulation Type, output to output, and outputs to ground. |
| Module keying | Electronic, software configurable |
| Removable terminal block | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire size | 1756-TBCH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. 1756-TBS6H Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. |
| Terminal block torque specs | 1756-TBCH 0.5 N•m (4.4 lb•in) |
| Wiring category ⁽¹⁾ | 2 - on signal ports |
| Wire type | Copper |
| Enclosure type rating | None (open-style) |
| Temperature code | T4 |

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-OF8IH, 1756-OF8IHK |
|--|---|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0 °C < Ta < +60 °C (+32 °F < Ta < +140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration (operating) IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine-wave 80% AM from 80...2000 MHz 10V/m with 200 Hz square wave 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz square wave 50% Pulse 100% AM @ 1890 MHz 10V/m with 1 kHz sine-wave 80% AM from 2000...2700 MHz |

Environmental Specifications (Continued)

| Attribute | 1756-OF8IH, 1756-OF8IHK |
|---|---|
| EFT/B immunity IEC 61000-4-4 | ±2 kV @ 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±2 kV line-earth (CM) on shielded ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |

Certifications


| Certification (when product is marked) ⁽¹⁾ | 1756-OF8IH, 1756-OF8IHK |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN 60079-0; General Requirements EN 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc UL 20 ATEX 2408X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0; General Requirements IEC 60079-7; Potentially Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc IECEX UL 20.0084X |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2489X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| CCC | CCC 2020122309113918, 2020122309113919 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.


1756-CFM

ControlLogix® configurable flowmeter module

1756-CFM Standard Magnetic Pickup

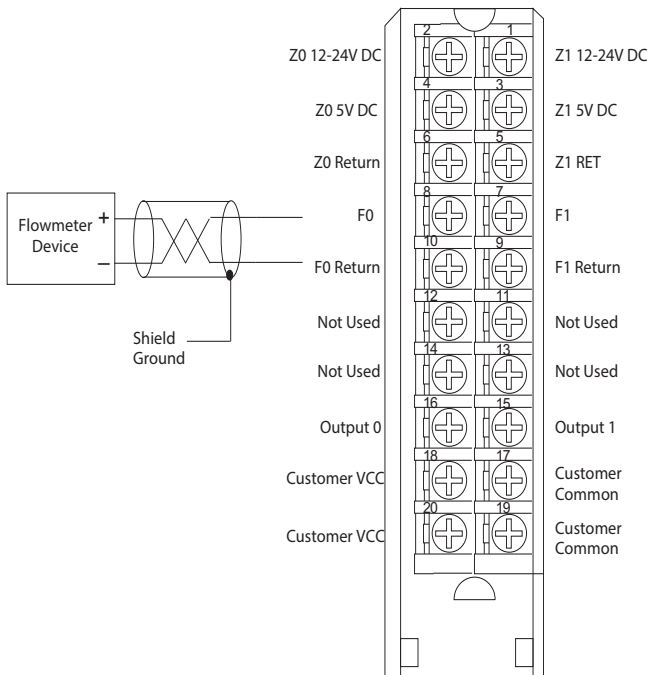

1756-CFM Standard Output

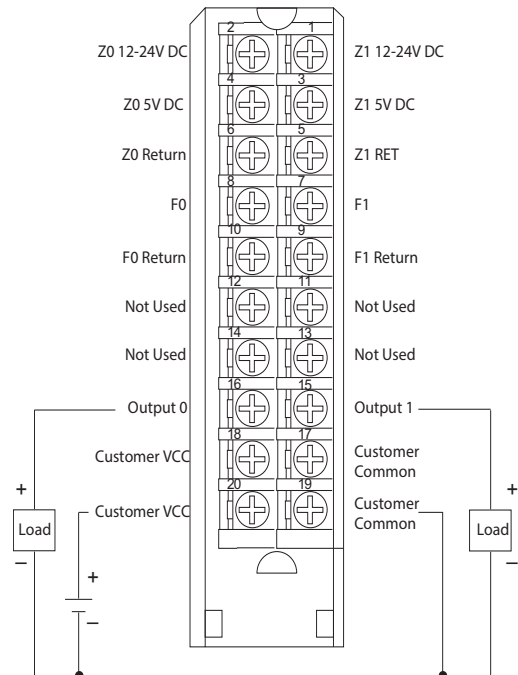


1. This wiring diagram can be used in applications with 50 mV (magnetic pickup), 1.3V (TTL), or 4V (preamp level) thresholds. You must use the Studio 5000 Logix Designer® application to choose the appropriate threshold level for your specific application.
2. If separate power sources are used, do not exceed the specified isolation voltage.

If separate power sources are used, do not exceed the specified isolation voltage.


The 1756-CFM module provides Totalizer mode for metering applications, or high-speed frequency measurements for speed or rate control applications, on two channels connected to flowmeters.

1756-CFM Standard Prover/Detector Example 1

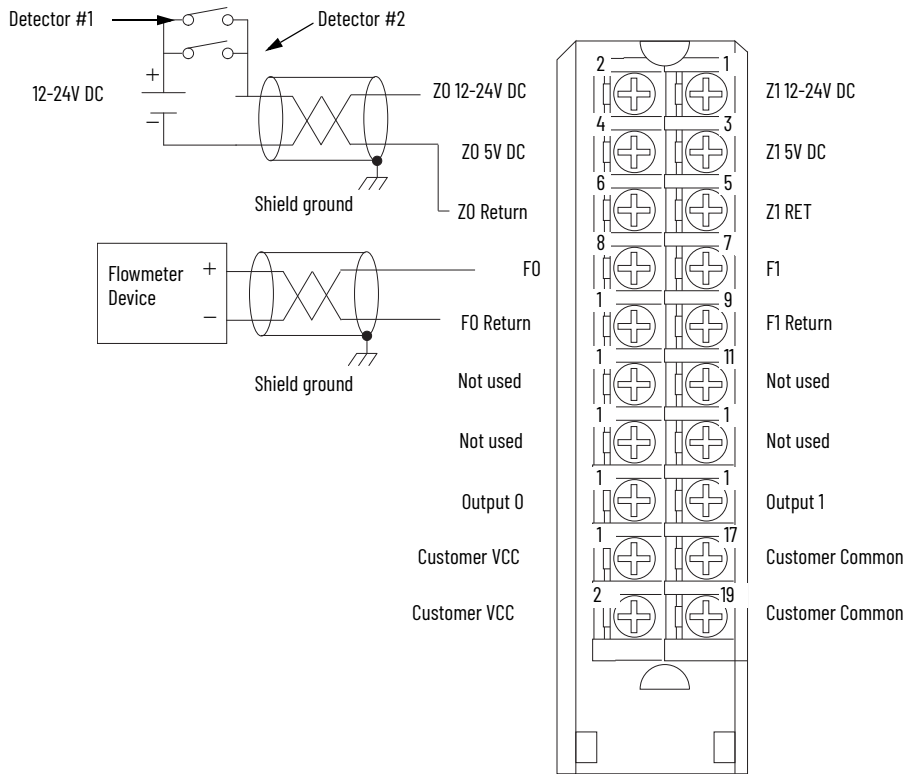


- Detectors #1 and #2 must be wired in parallel.
- Customer VCC can be used to power detectors. In this case, though, the maximum current on the wiring arm must be less than 4 A.
- The wiring example above shows a 12-24V DC standard prover connected to the module.
If you use a 5V DC standard prover, make sure the positive wire is connected to the 5V terminal (for example, Z0 5V DC).
- If separate power sources are used, do not exceed the specified isolation voltage.

1756-CFM Standard Prover/Detector Example 2

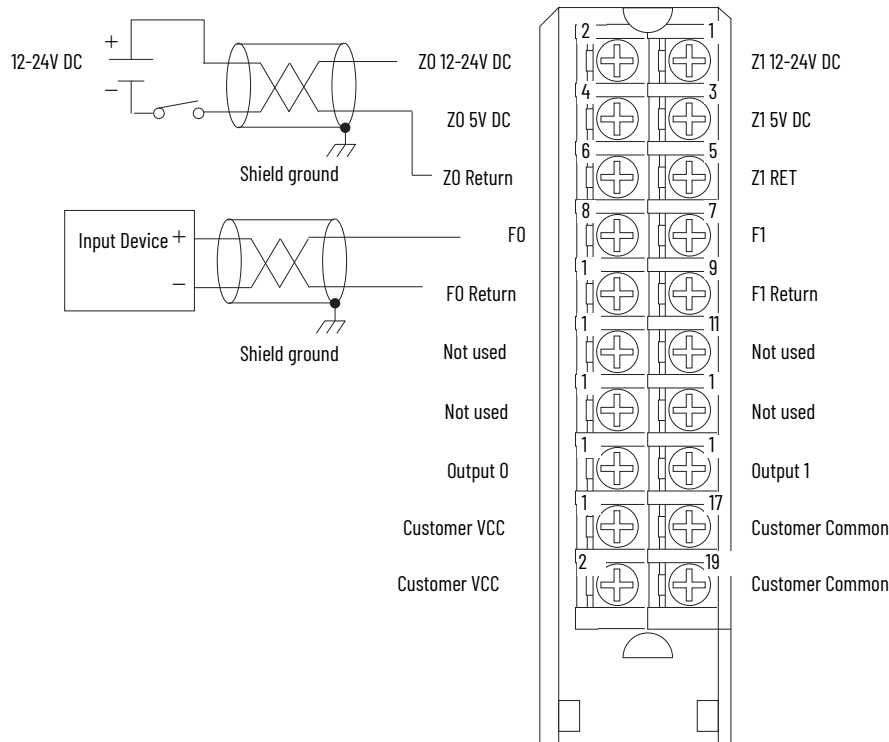


- Customer VCC can be used to power detectors. In this case, though, the maximum current on the wiring arm must be less than 4 A.
- The wiring example above shows a 12-24V DC standard prover connected to the module. If you use a 5V DC standard prover, make sure the positive wire is connected to the 5V terminal (for example, Z0 5V DC).
- If separate power sources are used, do not exceed the specified isolation voltage.

Series A Modules



Series B and Later Modules



Technical Specifications

| Attribute | 1756-CFM/A | 1756-CFM/B |
|--------------------------------|---|-------------------------|
| Inputs | 4 (2 per channel) | |
| Inputs per channel | 2 flowmeter (F) inputs used for all modes 2 gate inputs used in Totalizer mode for prover/store count | |
| Outputs | 2 current sourcing | |
| Backplane current draw at 5.1V | 300 mA | |
| Backplane current draw at 24V | 16 mA | 25 mA |
| Total backplane power | 1.7 W | 2.13 W |
| Power dissipation, max | 6 W @ 60 °C (140 °F) | 3.12 W @ 60 °C (140 °F) |
| Thermal dissipation | 20.4 BTU/hr | 10.6 BTU/hr |
| Isolation voltage | 250V (continuous), reinforced insulation type, I/O-to-backplane 250V (continuous), basic insulation type, I/O group-to-group | |
| Module keying | Electronic, software configurable | |

Technical Specifications (Continued)

| Attribute | 1756-CFM/A | 1756-CFM/B |
|---------------------------------|--|------------|
| Removable terminal block | 1756-TBNH 1756-TBSH | |
| Screw torque | 0.5 N•m (4.4 lb•in) | |
| RTB keying | User-defined mechanical | |
| Slot width | 1 | |
| Wire category | 2 on signal ports 1 on power ports ⁽¹⁾ | |
| Wire size | 1756-TBNH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. 1756-TBSH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. | |
| Enclosure type | None (open-style) | |
| North American temperature code | T4 | |
| Totalizer fill and prover | Yes | |
| High resolution, max | 100 kHz | |
| Frequency | 0.0005 Hz resolution | |
| Reverse polarity protection | Outputs only | |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Input Specifications

| Attributes | 1756-CFM ⁽¹⁾ |
|---|--|
| Inputs | 4 (2 per channel) |
| Inputs per channel | Two flowmeter (F) inputs used for all modes Two gate inputs used in Totalizer mode for prover/store count |
| Count range, max | 2, 147, 483, 647 |
| Input frequency, max | 100 kHz @ flowmeter inputs (overrange occurs at 100 kHz) |
| Operating voltage range, inputs | ±30V, selectable input thresholds of 50 mV, 1.3V, and 4V: ±30V peak unterminated open circuit voltage, magnetic pickup TTL compatible, input voltage >1.3V DC is Logic 1 and -0.7...1.3V DC is Logic 0 12...24V DC powered preamp output, 4V DC threshold |
| Flowmeter input impedance | 5 k Ω ±30% resistive |
| Filtering (inputs F0 & F1) | Firmware selectable: High-speed 100 kHz or low-pass filter for frequencies < 70 Hz |
| Gate input voltage range | 5V operation: 4.5...5.5V DC 12/24V operation: 10...26.4V DC |
| Gate input on-state current, min | 4 mA |
| Gate input on-state current, nom | 15 mA |
| Mechanical filter debouncing (Z0 & Z1 Inputs) | Software selectable |
| Input sampling period | User selectable |

(1) These specifications apply to Series A and Series B modules.

Output Specifications

| Attribute | 1756-CFM/A | 1756-CFM/B |
|---|--|------------|
| Outputs | 2 current sourcing | |
| Output voltage source | Customer supplied | |
| Operating voltage range, outputs ⁽¹⁾ | 5V operation: 4.5...5.5V DC for 3...20 mA load per point 12/24V operation: 10...31.2V DC for 40 mA...1 A load per point | |
| Output type | IEC 1 A 24V DC | |
| Output Current per point ⁽¹⁾ | 1 A @ 10...31.2V DC 20 mA @ 4.5...5.5V DC ⁽²⁾ | |

Output Specifications (Continued)

| Attribute | 1756-CFM/A | 1756-CFM/B |
|------------------------------------|--|--|
| Surge current | 2 A for 50 ms, repeatable every 2 s @ 60 °C (140 °F) | 2 A for 10 ms, repeatable every 1 s @ 60 °C (140 °F) |
| Off-state leakage current, max | < 300 μ A @ 31.2V DC | |
| On-state voltage drop, max | 0.6 Ω x current | |
| Output control | Any number of outputs is assignable to either of two flowmeter channels Each output can have 2 "turn-on" and "turn-off" preset values | |
| Output switching time | < 50 μ s turn on, <300 μ s turn off Outputs triggered by Total; all other "turn-on" and "turn-off" times <1 ms | |
| Overload current, max | Electronic <ul style="list-style-type: none"> 1.2 A per output 2.4 A per module | |
| Output short circuit protection | Electronic (No indication of fault. Remove overload and toggle output on/off to restore.) | |
| Output reverse polarity protection | Yes (If wired incorrectly, module outputs can be permanently disabled.) | |

(1) UL rating for 24V DC, 24VA.

(2) All outputs can be on simultaneously without derating.

Environmental Specifications

| Attribute | 1756-CFM/A | 1756-CFM/B |
|--|--|---|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0 °C < Ta < 60 °C (32 °F < Ta < 140 °F) | |
| Temperature, surrounding air, max | 60 °C (140 °F) | |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) | |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing | |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz | |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g | |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g | |
| Emissions | IEC 61000-6-4 | |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges | |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1k Hz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz | |
| EFT/B immunity IEC 61000-4-4 | \pm 4 kV at 5 kHz on unshielded output and power ports \pm 4 kV at 5 kHz on shielded input ports | \pm 2 kV at 5 kHz and 100 kHz on unshielded output and power ports \pm 3 kV at 5 kHz and 100 kHz on shielded input ports |
| Surge transient immunity IEC 61000-4-5 | \pm 1 kV line-line (DM) and \pm 2 kV line-earth (CM) on unshielded output and power ports \pm 2 kV line-earth (CM) on shielded input ports | |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz on shielded signal ports | |

Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-CFM |
|---|--|
| cULus | UL61010-1 & CAN/CSA C22.2 No. 61010-1-12, Electrical Equipment For Measurement, Control, and Laboratory Use; Part 1: General Requirements. UL61010-2-201 & CAN/CSA-IEC 61010-2-201:14, Safety requirements for electrical equipment for measurement, control, and laboratory use – part 1-201: Particular requirement for control equipment. UL 121201 Nonincendive Electrical Equipment for Use in Class I and II, Division 2 and Class III, Divisions 1 and 2 Hazardous (Classified) Locations CSA C22.2 No. 213-17 Nonincendive electrical equipment for use in Class I and II, Division 2 and Class III, Divisions 1 and 2 hazardous (classified) locations |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) European Union 2011/65/EU RoHS, compliant with: EN 50581; Technical documentation |
| EX | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN 60079-0; General Requirements EN 60079-7; Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc DEMKO20ATEX2340X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0; General Requirements IEC 60079-7; Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEX UL 20.0013X |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1^{er} muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations |
| CCC | CCC: 2020122309113668 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-CMS1B1, 1756-CMS1C1

ControlLogix Compute modules are chassis-based modules that let you communicate directly with a ControlLogix 5570 or ControlLogix 5580 controller via the system backplane and over a network. The Compute modules offer an embedded Microsoft® Windows 10 or Linux operating system within which you can create custom applications while utilizing an application programming interface (API).

Technical Specifications

| Attribute | 1756-CMS1B1 | 1756-CMS1C1 |
|----------------------------------|--|---------------------------|
| Solid state drive (SSD) capacity | 32 GB | |
| Embedded operating system | Windows 10 IoT Enterprise LTSB 64 bit | Linux 32 bit (Debian 8.9) |
| Onboard memory | 4 GB | |
| Voltage and current ratings | 5.1V DC @ 1.40 A | |
| Power consumption | 7 W | |
| Power dissipation, max | 7 W | |
| Thermal dissipation | 23.88 BTU/hr | |
| Replacement battery | Panasonic Type BR1225A coin type lithium battery - Commercially available | |
| Weight, approx | 0.394 kg (0.868 lb) | |
| Slot width | 1 | |
| Module location | ControlLogix chassis, any slot | |
| Chassis | 1756-A4, 1756-A7, 1756-A10, 1756-A13, 1756-A17 Series B, Series C | |
| Wire size | Ethernet connections Ethernet cabling and installation according to IEC 61918 and IEC 61784-5-2 | |
| Wiring category ⁽¹⁾ | 3 - on USB port 2 - on Ethernet ports | |
| North American temperature code | T5 | |
| Enclosure type rating | None (open-style) | |

(1) Use this Conductor Category information for planning conductor routing. See Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-CMS1B1, 1756-CMS1C1 |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | Series C Chassis: -25 °C < Ta < +60 °C (-13 °F < Ta < +140 °F) Series B Chassis: -25 °C < Ta < +50 °C (-13 °F < Ta < +122 °F) |
| Temperature, surrounding air, max | Series C Chassis: 60 °C (140 °F) Series B Chassis: 50 °C (122 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 4 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±2 kV at 5 kHz on Ethernet ports |
| Surge transient immunity IEC 61000-4-5 | ±2 kV line-earth (CM) on Ethernet ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |

Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-CMS1B1, 1756-CMS1C1 |
|---|---|
| cULus | UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810 |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2011/65/EU RoHS, compliant with: <ul style="list-style-type: none"> EN 50581; Technical documentation |
| RCM | Australian Radiocommunications Act, compliant with: <ul style="list-style-type: none"> EN 61000-6-4; Industrial Emissions |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| Morocco | In conformity with the following regulations: <ul style="list-style-type: none"> Arrêté ministériel n° 6404-15 du 1 er muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.


1756-HSC

ControlLogix high-speed counter module

The 1756-HSC module provides four high-speed, output-switching, on-off windows. The module uses pulses for counting and frequency.


1756-HSC to Allen-Bradley® 845 Incremental Encoder

| Application | A1 Connections | B1 Connections | Z1 Connections |
|---|--|--|--|
| Differential Line Driver Output (40 mA) | <ul style="list-style-type: none"> White - A1 5V DC Black of white - A1 Return | <ul style="list-style-type: none"> Blue - B1 5V DC Black of blue - B1 Return | <ul style="list-style-type: none"> Green - Z1 5V DC Black of green - Z1 Return |

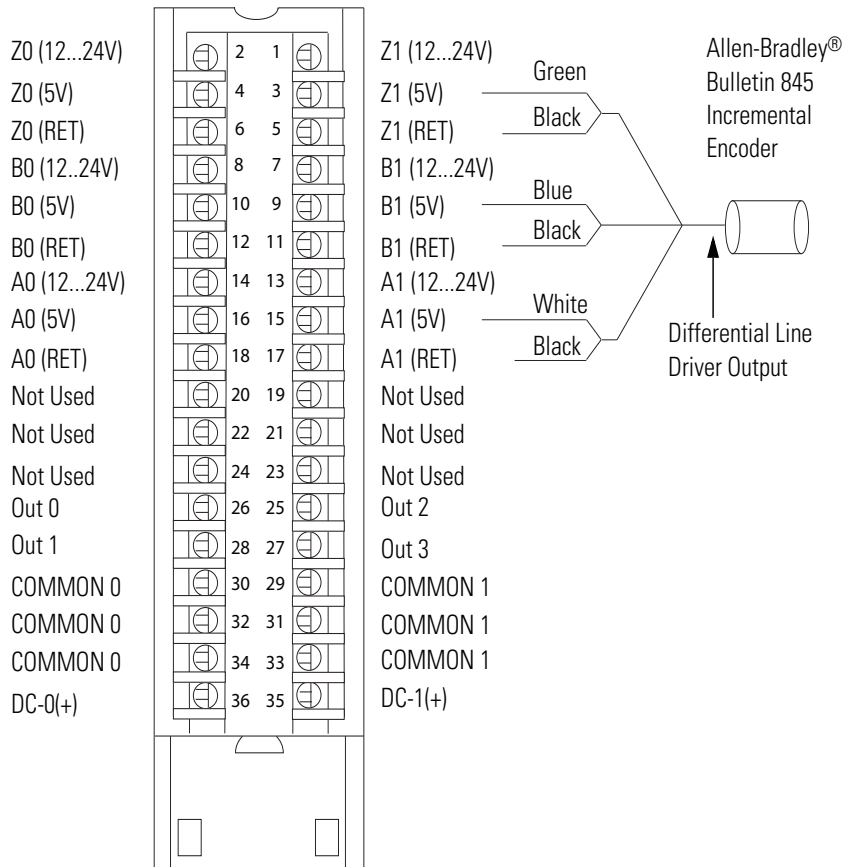



1756-HSC to Allen-Bradley® 872 3-Wire DC Proximity Sensor

| Application | A0 Connections | B0 Connections | Z0 Connections |
|---------------------|---|------------------------------------|------------------------------------|
| PNP (Sourcing) N.O. | <ul style="list-style-type: none"> Black - A0 12...24V DC Blue, PS(-)-A0 Return | Jumper B0 12...24V DC to B0 Return | Jumper Z0 12...24V DC to Z0 Return |

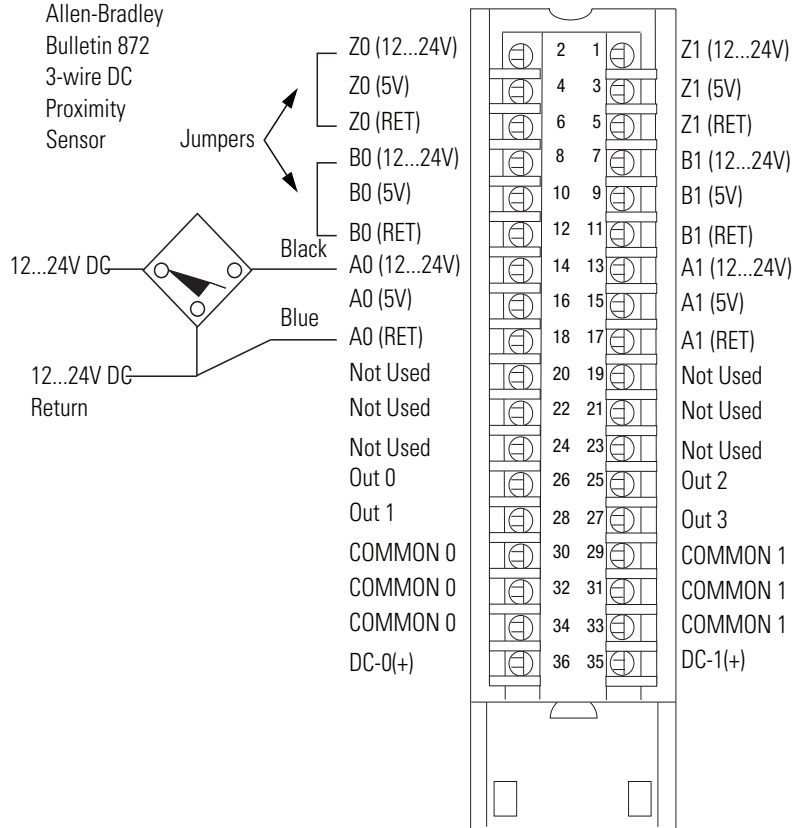

1756-HSC to PHOTOSWITCH® Series 10,000 Photoelectric Sensor

| Application | A1 Connections | B1 Connections | Z1 Connections |
|-------------|--|---|--|
| Any | <ul style="list-style-type: none"> Black - A1 12...24V DC Blue - A1 Return | <ul style="list-style-type: none"> Jumper B1 12...24V DC to B1 Return | <ul style="list-style-type: none"> White - Z1 12...24V DC Blue - Z1 Return |

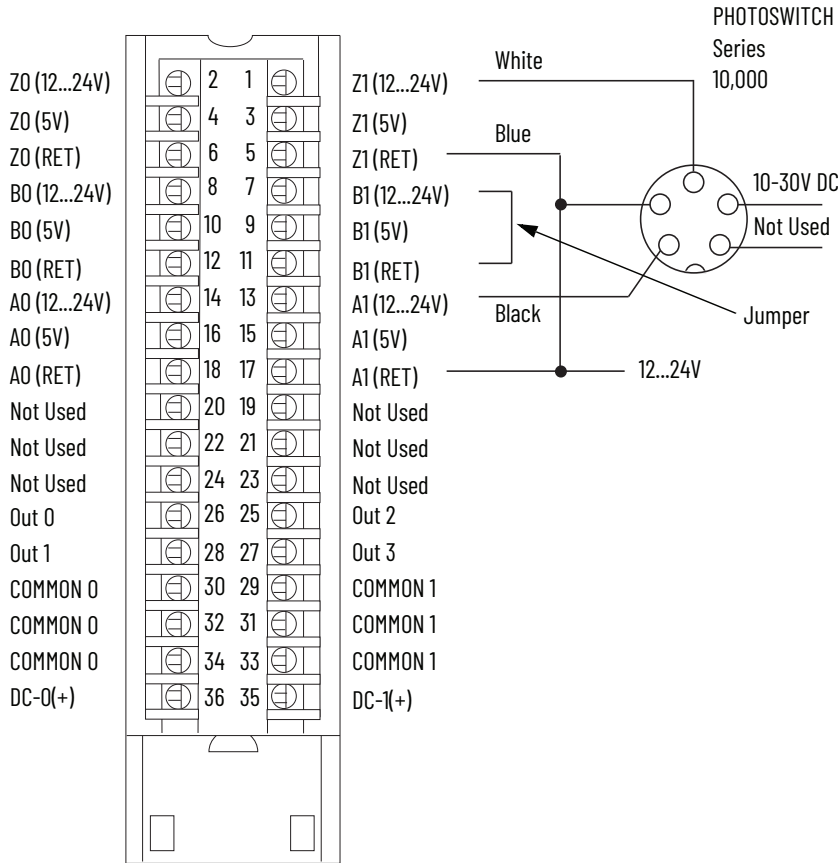

Technical Specifications

| Attribute | 1756-HSC/A, B | 1756-HSC/C, D |
|---|---|--|
| Number of counters | 2 | |
| Inputs per counter | 3 (A, B, Z for gate/reset) | |
| Outputs | 4 (2 points/group) | |
| Operating voltage range, inputs ⁽¹⁾ | 5V operation: 4.5...5.5V DC 12/24V operation: 10...26.4V DC | |
| Operating voltage range, outputs ⁽¹⁾ | 5V operation: 4.5...5.5V DC 12/24V operation: 10...26.4V DC | |
| Current draw at 5.1V | 300 mA | |
| Current draw at 24V | 3 mA | |
| Total backplane power | 1.6 W | |
| Power dissipation, max | 5.6 W @ 60 °C (140 °F) | 3.5 W @ 60 °C (140 °F) |
| Thermal dissipation | 19.1 BTU/hr | 12 BTU/hr |
| Isolation voltage | 125V (continuous), basic insulation type, input group-to-backplane 30V (continuous), basic insulation type, input group-to-input group | 250V (continuous), basic insulation type, input group-to-backplane 125V (continuous), basic insulation type, input group-to-input group |
| Module keying | Electronic, software configurable | |
| Removable terminal block | 1756-TBCH 1756-TBS6H | |
| Screw torque | 0.5 N•m (4.4 lb•in) | |
| RTB keying | User-defined mechanical | |
| Slot width | 1 | |
| Wire size | 1756-TBCH Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. 1756-TBS6H Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. | |
| Wire category | 2 on signal ports 1 on power ports ⁽²⁾ | |
| Enclosure type | None (open-style) | |
| Temperature code | T4 | |

(1) UL rating is 24V DC.

(2) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Input Specifications

| Attribute | 1756-HSC |
|-------------------------|---|
| Number of counters | 2 |
| Inputs per counter | 3 (A, B, Z for gate/reset) |
| Input frequency, max | 1 MHz in counter modes (A input) 500 kHz in rate measurement mode (A input) 250 kHz in encoder mode (A/B inputs, X1 or X4) 70 Hz with filter enabled |
| Count range | 0...16, 777, 214 |
| Counting frequency, max | 1000 kHz |
| Input current, min | 4 mA |
| Input current, nom | 15 mA |

Output Specifications

| Attribute | 1756-HSC/A, B | 1756-HSC/C, D |
|---|---|--|
| Outputs | 4 (2 per common) | |
| Output delay time Off to On On to Off | 20 μ s nom/50 μ s max 60 μ s nom/300 μ s max | |
| Off-state leakage current per point, max | 300 μ A | |
| On-state voltage drop, max | 0.55V | |
| Output current rating, per point ⁽¹⁾ | 20 mA @ 4.5...5.5V DC 1.0 A @ 10...31.2V DC | |
| Current limit | < 4 A | |
| Surge current per point | 2 A for 10 ms every 1 s @ 60 °C (140 °F) | |
| Load current per point, min | 5V operation: 3 mA 12/24V operation: 40 mA | |
| Output control | Up to two outputs are assigned to each counter channel Each output can have two 'turn-on' and 'turn-off' preset values | |
| Short circuit protection | Electronic (Remove overload and toggle On/Off to restore.) | |
| Reverse polarity protection | Yes (If wired incorrectly, module outputs can be permanently disabled.) | |
| Counter, max | 1 MHz | |
| Rate measurement, max | 500 kHz | |
| Encoder, max | 250 kHz | |
| Debounce filter, max | 70 Hz | User configurable to the following: <ul style="list-style-type: none"> • 50 Hz • 500 Hz • 5 kHz • 50 kHz |

(1) UL rating is 24V DC, 24VA.

Environmental Specifications

| Attribute | 1756-HSC/A, B | 1756-HSC/C, D |
|--|--|---------------|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0 °C < Ta < 60 °C (32 °F < Ta < 140 °F) | |
| Temperature, surrounding air, max | 60 °C (140 °F) | |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) | |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing | |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz | |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g | |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g | |
| Emissions | IEC 61000-6-4 | |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges | |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz | |

Environmental Specifications (Continued)

| Attribute | 1756-HSC/A, B | 1756-HSC/C, D |
|---|--|---|
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on power ports ±4 kV at 5 kHz on signal ports | ±2 kV at 5 kHz and 100 kHz on power ports ±3 kV at 5 kHz and 100 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on power ports ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports ±2 kV line-earth (CM) on shielded ports | |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz on shielded signal ports | |

Certifications




| Certification (when product is marked) ⁽¹⁾ | 1756-HSC |
|---|--|
| cULus | UL61010-1 & CAN/CSA C22.2 No. 61010-1-12, Electrical Equipment For Measurement, Control, and Laboratory Use; Part 1: General Requirements. UL61010-2-201 & CAN/CSA-IEC 61010-2-201:14, Safety requirements for electrical equipment for measurement, control, and laboratory use – part 1-201: Particular requirement for control equipment. UL 121201 Nonincendive Electrical Equipment for Use in Class I and II, Division 2 and Class III, Divisions 1 and 2 Hazardous (Classified) Locations CSA C22.2 No. 213-17 Nonincendive electrical equipment for use in Class I and II, Division 2 and Class III, Divisions 1 and 2 hazardous (classified) locations |
| CE | European Union 2014/30/EU EMC Directive, compliant with: • EN 61326-1; Meas./Control/Lab., Industrial Requirements • EN 61000-6-2; Industrial Immunity • EN 61000-6-4; Industrial Emissions • EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) European Union 2011/65/EU RoHS, compliant with: EN 50581; Technical documentation |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: • EN 60079-0; General Requirements • EN 60079-7; Equipment protection by increased safety "e" • II 3 G Ex ec IIC T4 Gc • DEMKO20ATEX2340X |
| IECEX | IECEX System, compliant with: • IEC 60079-0; General Requirements • IEC 60079-7; Equipment protection by increased safety "e" • II 3 G Ex ec IIC T4 Gc • IECEx UL 20.0013X |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| Morocco | In conformity with the following regulations: • Arrêté ministériel n° 6404-15 du 1 er muharram 1437 (15 octobre 2015) Équipements électriques destinés à être utilisés sous certaines limites de tension • Arrêté ministériel n° 6404-15 du 29 ramadan 1436 (16 juillet 2015) Compatibilité électromagnétique des équipements |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: • 2016 No. 1091, Electromagnetic Compatibility Regulations • 2016 No. 1101, Electrical Equipment (Safety) Regulations • 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations |
| CCC | CCC: 2020122309113668 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.


1756-LSC8XIB8I, 1756-LSC8XIB8IK

ControlLogix 10...30V low-speed counter module

Simplified Schematic

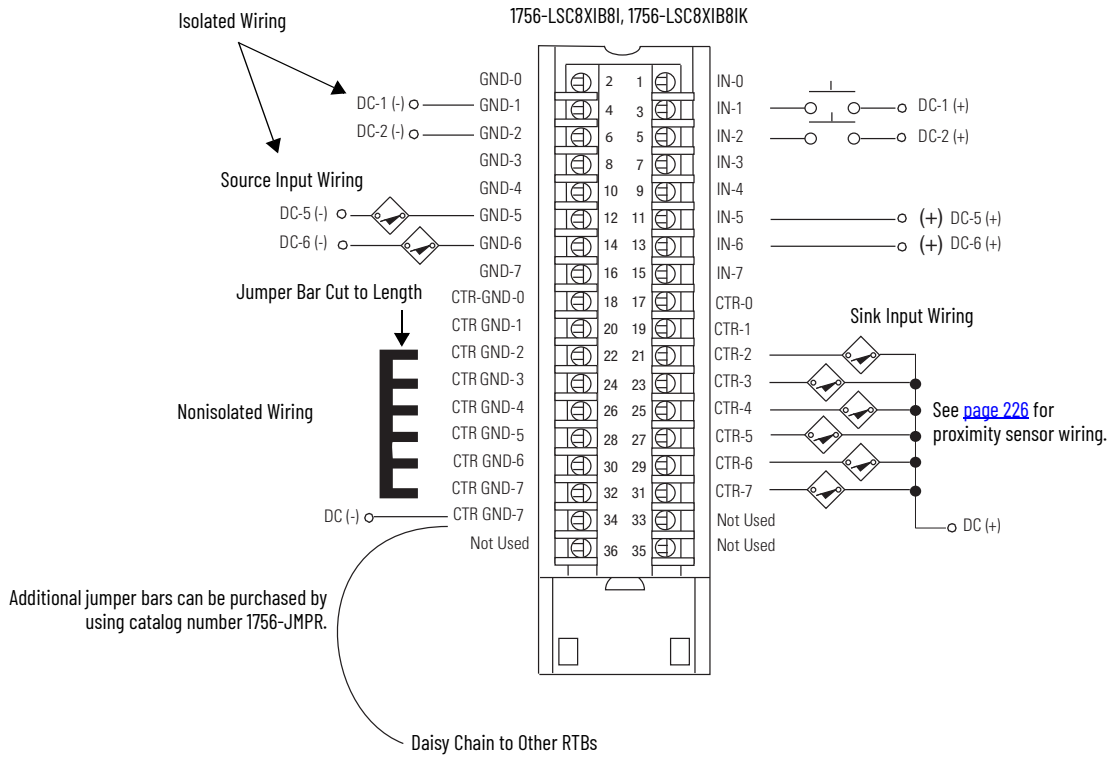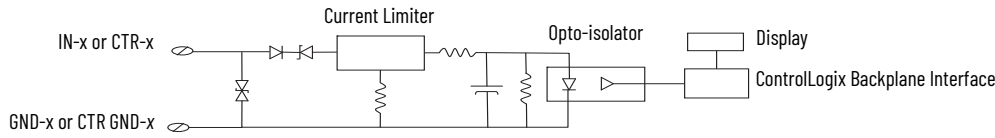

The following diagram shows how to wire a proximity sensor to the module's eight counters or eight hardware inputs. Counters use incoming pulses for counts and frequency with two user-configurable On/Off windows per counter. Hardware inputs provide standard input or counter-control functionality.

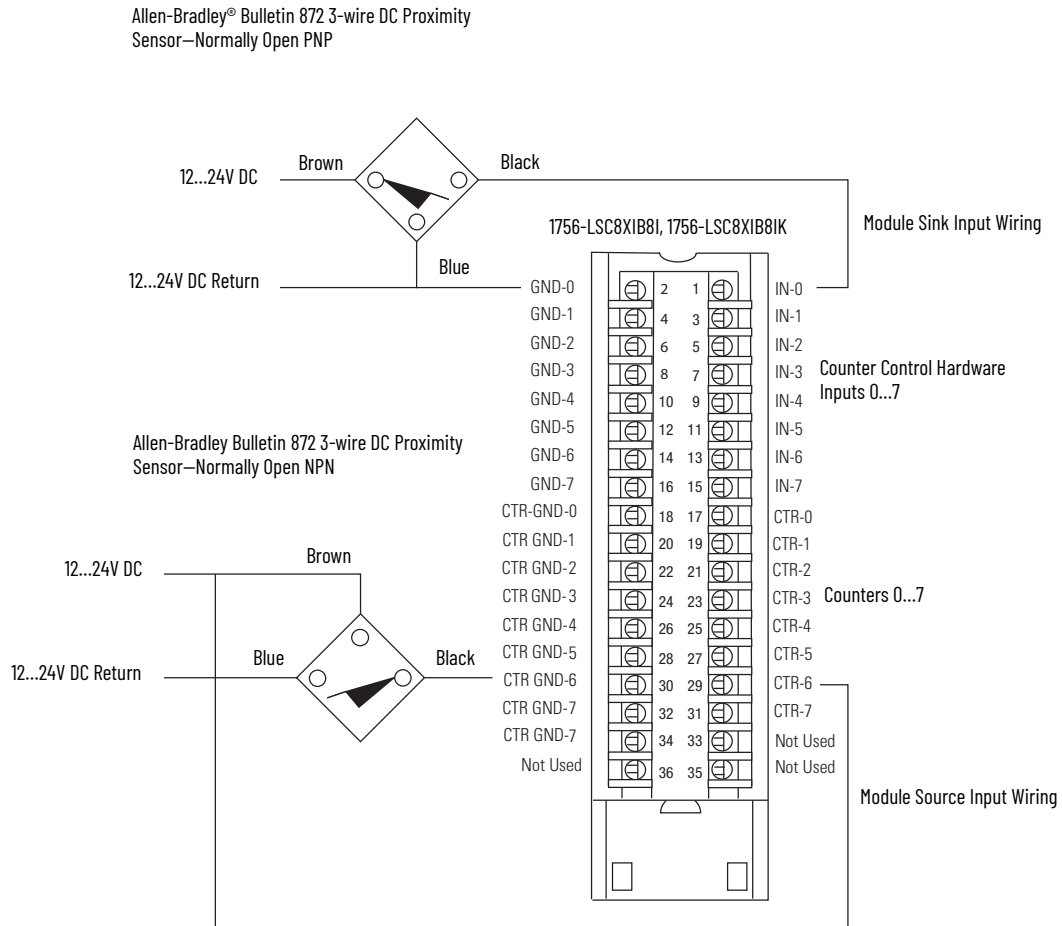

Counter Specifications

| Attribute | 1756-LSC8XIB8I, 1756-LSC8XIB8IK |
|-------------------------|---|
| Number of counters | 8 individually isolated |
| Counting frequency, max | 40 kHz |
| Count range | 0...2,147,483,648 (31-bit counter) |
| Voltage category | 12/24V DC sink/source |
| Operating voltage range | 10...30V DC |
| Off-state voltage, max | 5V |
| Off-state current, max | 1.5 mA |
| On-state current, min | 2 mA @ 10V DC |
| On-state current, max | 5 mA @ 30V DC |
| Change of state | Enter or exit user-configurable windows |

Hardware Input Specifications

| Attribute | 1756-LSC8XIB8I, 1756-LSC8XIB8IK |
|-------------------------|--|
| Inputs | 8 individually isolated, standard input or counter-control functionality |
| Voltage category | 12/24V DC sink/source |
| Operating voltage range | 10...30V DC |
| Input voltage, nom | 24V DC |

Hardware Input Specifications (Continued)

| Attribute | 1756-LSC8XIB8I, 1756-LSC8XIB8IK |
|---|--|
| Input delay time (screw to backplane) Off to On On to Off | 14 μ s nom/23 μ s max + user-configurable filter time of 0...30,000 μ s 14 μ s nom/23 μ s max + user-configurable filter time of 0...30,000 μ s |
| Off-state voltage, max | 5V |
| Off-state current, max | 1.5 mA |
| On-state current, min | 2 mA @ 10V DC |
| On-state current, max | 5 mA @ 30V DC |
| Change of state | Any transition |

Module Specifications

| Attribute | 1756-LSC8XIB8I, 1756-LSC8XIB8IK |
|----------------------------------|--|
| Current draw @ 5.1V | 275 mA |
| Current draw @ 24V | 3 mA |
| Total backplane power | 1.47 W |
| Power dissipation | 3.8 W @ 60 °C (140 °F) |
| Thermal dissipation | 12.97 BTU/hr |
| Input impedance, max | Six k Ω @ 30V DC |
| Cyclic update time | 200 μ s...750 ms |
| Isolation voltage | 250V (continuous), reinforced insulation type, inputs-to-backplane 250V (continuous), basic insulation type, input-to-input |
| Module keying | Electronic, software configurable |
| Removable terminal block housing | 1756-TBCH 1756-TBS6H |
| RTB keying | User-defined mechanical |
| Slot width | 1 |
| Wire category | 1 on signal ports ⁽¹⁾ |
| Enclosure type | None (open-style) |
| Temperature code | T4 |
| Reverse polarity protection | Yes |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Environmental Specifications

| Attribute | 1756-LSC8XIB8I, 1756-LSC8XIB8IK |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |

Environmental Specifications (Continued)

| Attribute | 1756-LSC8XIB8I, 1756-LSC8XIB8IK |
|---|--|
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on signal ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |


Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-LSC8XIB8I, 1756-LSC8XIB8IK |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> EN IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements EN IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc UL22ATEX2820X |
| IECEX | IECEX System, compliant with: <ul style="list-style-type: none"> IEC 60079-0: Explosive atmospheres - Part 0: Equipment - General requirements IEC 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e" II 3 G Ex ec IIC T4 Gc IECEX UL 22.0065X |
| UKex | In conformity with the following UKex Statutory Instruments and their amendments: <ul style="list-style-type: none"> Schedule 1 of the UKEX Regulation 2016 No. 1107 Equipment protection by increased safety "e", reference certificate number UL22UKEX2602X Zone 2 classification according to UKEX Regulation 2016 No. 1107 |
| UKCA | In conformity with the following UK Statutory Instruments and their amendments: <ul style="list-style-type: none"> 2016 No. 1091, Electromagnetic Compatibility Regulations 2016 No. 1101, Electrical Equipment (Safety) Regulations 2016 No. 1107, Equipment and Protective Systems Intended for Use in Potentially Explosive Atmospheres Regulations 2012 No. 3032, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment |
| KC | Korean Registration of Broadcasting and Communications Equipment, compliant with Article 58-2 of Radio Waves Act, Clause 3 |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |
| CCC | CCC 2020122309111830, 2020122309111998, 2020122309113868 CNCA-C23-01 强制性产品认证实施规则 防爆电气 CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products |


(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

1756-PLS


ControlLogix programmable limit switch module

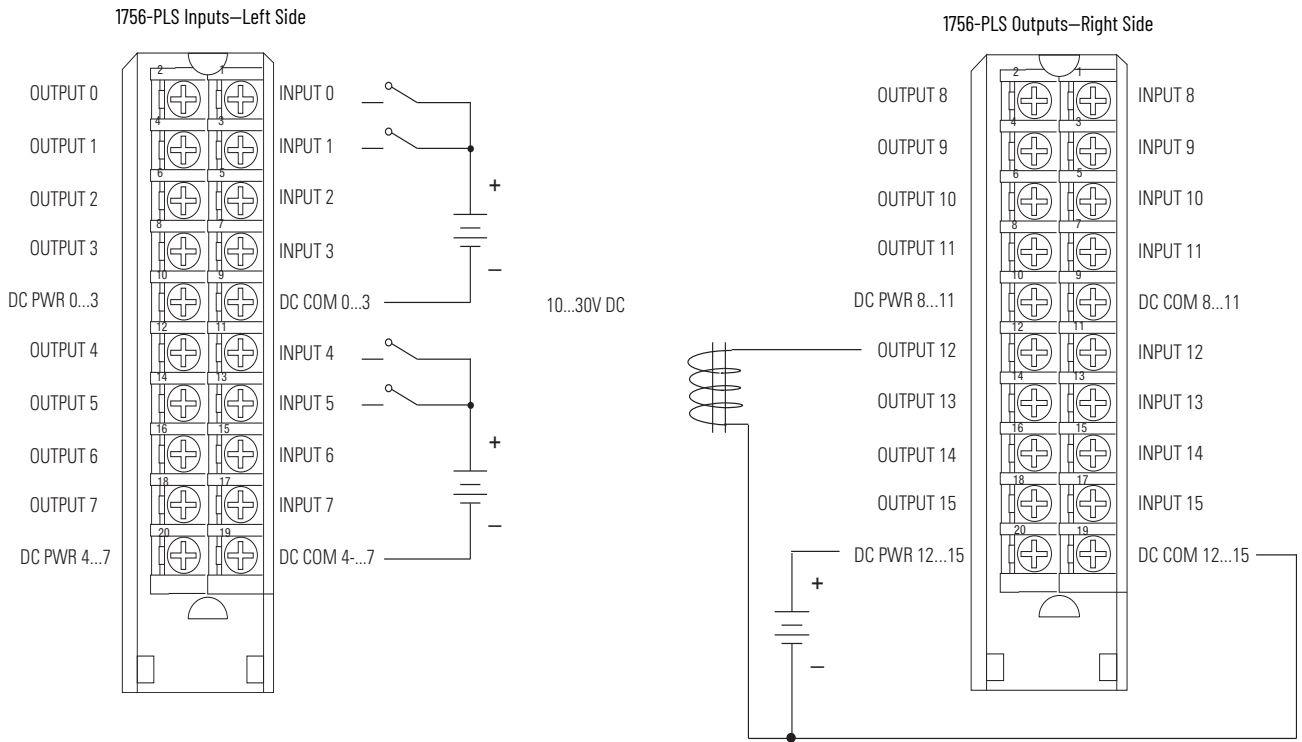


The 1756-PLS module supports enhanced packaging applications. The module requires three contiguous slots in the chassis.

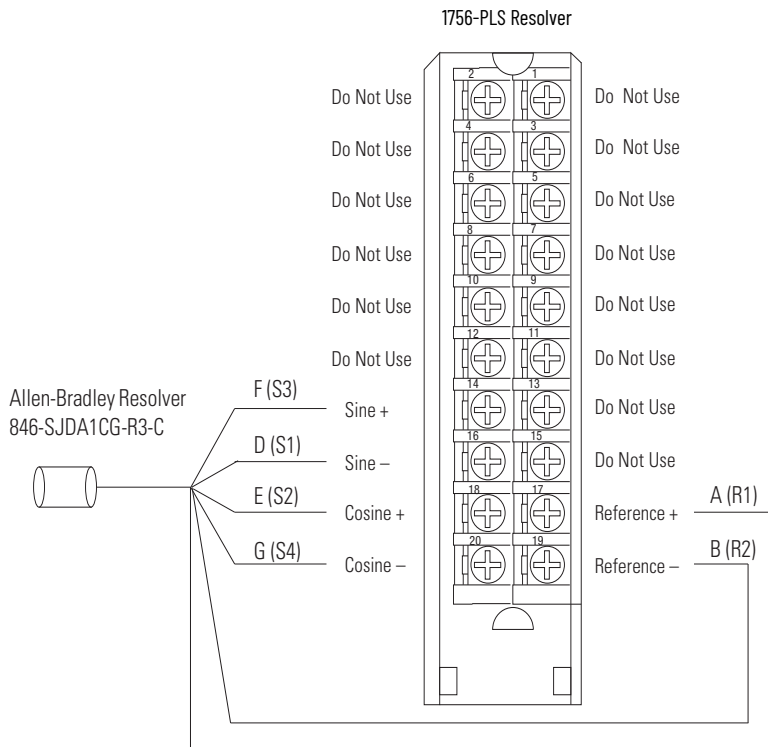


Indicator for Left Slot I/O Module



Indicator for Left Resolver Module



Indicator for Right Slot I/O Module



Technical Specifications

| Attribute | 1756-PLS |
|--------------------------|---|
| Module configuration | Left section: Two groups of four outputs and four inputs each Center section: resolver interface and I/O control Right section: Two groups of four outputs and four inputs each |
| Current draw at 5.1V | 1 A |
| Current draw at 24V | 125 mA |
| Total backplane power | 8.1 W |
| Power dissipation, nom | 22.62 W @ 30 °C (86 °F) 18.22 W @ 60 °C (140 °F) |
| Power dissipation, max | 25.7 W @ 30 °C (86 °F) 21.3 W @ 60 °C (140 °F) |
| Thermal dissipation, nom | 77.23 BTU/hr @ 30 °C (86 °F) 62.2 BTU/hr @ 60 °C (140 °F) |
| Thermal dissipation, max | 87.74 BTU/hr @ 30 °C (86 °F) 72.72 BTU/hr @ 60 °C (140 °F) |
| Isolation voltage | 250V (continuous), basic insulation type, I/O-to-backplane, I/O group-to-group, resolver-to-backplane, and resolver-to-I/O |
| Removable terminal block | Requires 3 RTBs: 1756-TBNH or 1756-TBSH |
| RTB keying | User-defined mechanical |
| Slot width | 3 |
| Wire category | 2 on signal ports 1 on power ports ⁽¹⁾ |
| Enclosure type | None (open style) |
| Temperature code | T4 |

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Resolver Specifications

| Attribute | 1756-PLS |
|-----------------------|--|
| Resolver location | Center section |
| Compatible resolver | Allen-Bradley resolver 846-SJxxx-R3-x (x = customer options) |
| Resolver interface | 2V rms, reference output (differential pair) 2V rms, sine, and cosine inputs (two differential pairs) |
| Reference voltage | 2V rms ±20% |
| Reference frequency | 5 kHz ±20% |
| Digital resolution | 12 bits (4096 counts from hardware) |
| Angular resolution | 0.088°/bit |
| Digital count range | 0...4095 (decimal) |
| Maximum tracking rate | ±1800 RPM |
| Repeatability | ±0.0488% of full scale |
| Accuracy | ±0.0976% of full scale |

Input Specifications

| Attribute | 1756-PLS |
|--|--|
| Inputs | 16 (2 groups of 4 per I/O section) |
| Voltage category | 12/24V DC |
| Operating voltage range ⁽¹⁾ | 10.8...31.2V DC |
| Input delay time (screw to backplane) Off to On | < 15 μ s @ 30 °C (86 °F) < 150 μ s @ 60 °C (140 °F) |
| On to Off | < 30 μ s @ 30 °C (86 °F) < 200 μ s @ 60 °C (140 °F) |
| Power dissipation, inputs, nom | 1.86 W @ 60 °C (140 °F) |
| Power dissipation, inputs, max | 2.8 W @ 60 °C (140 °F) |
| Thermal dissipation, inputs, nom | 6.35 BTU/hr |
| Thermal dissipation, inputs, max | 9.56 BTU/hr |
| On-state voltage, min | 10V DC |
| On-state voltage, nom | 10.8...26.4V DC |
| On-state voltage, max | 31.2V DC |
| Off-state voltage, max | 5V DC |
| Off-state current, max | 1.5 mA |
| On-state current, min | 3 mA |
| On-state current, max | 10 mA |
| Input impedance, max | 3.3 k Ω @ 24V DC |
| Reverse polarity protection | Yes |

(1) UL certification for 24V DC nominal. Rockwell Automation specified to 10.8...31.2V DC.

Output Specifications

| Attribute | 1756-PLS |
|---|--|
| Outputs | 16 (2 groups of 4 per I/O section) |
| Voltage category | 12/24V DC |
| Operating voltage range ⁽¹⁾ | 10...31.2V DC |
| Output delay time Off to On On to Off | < 15 μ s @ 60 °C (140 °F) < 25 μ s @ 60 °C (140 °F) |
| Power dissipation, outputs, nom | 5.4 W @ 30 °C (86 °F) 3.2 W @ 60 °C (140 °F) |
| Power dissipation, outputs, max | 6 W @ 30 °C (86 °F) 3.8 W @ 60 °C (140 °F) |
| Thermal dissipation, outputs, nom | 18.43 BTU/hr @ 30 °C (86 °F) 10.93 BTU/hr @ 60 °C (140 °F) |
| Thermal dissipation, outputs, max | 21.48 BTU/hr @ 30 °C (86 °F) 11.93 BTU/hr @ 60 °C (140 °F) |
| Output power dissipation/slot thermal dissipation | 3.2 W @ 60 °C (140 °F) 10.93 BTU/hr @ 60 °C (140 °F) |
| Off-state leakage current per point, nom | <10 μ A @ 60 °C (140 °F) |
| Off-state leakage current per point, max | 300 mA @ 60 °C (140 °F) |
| On-state voltage, min | 10V DC |
| On-state voltage, nom | 10.8...26.4V DC |
| On-state voltage, max | 31.2V DC |
| Output voltage drop, max | 0.55V DC |
| Current per point, max | 1 A @ 30 °C ⁽²⁾ (86 °F) |
| Current per group, max | 4 A @ 30 °C ⁽³⁾ (86 °F) |
| Current per module, max | 8 A @ 30 °C ⁽⁴⁾ (86 °F) |
| Current limit | < 4 A |
| Surge current per point | 2 A for 10 ms every 1 s @ 60 °C (140 °F) |

Output Specifications (Continued)

| Attribute | 1756-PLS |
|-----------------------------|--|
| Load current per point, min | 40 mA |
| Output switching time | Switching 1 A @ 24V DC |
| Short circuit protection | Electronic (No indication of fault. Remove load and toggle on/off to restore.) |
| Reverse polarity protection | Yes, current limited. (If wired incorrectly, outputs can be permanently disabled.) |

(1) UL certification for 24V DC nominal. Rockwell Automation specified to 10.8...31.2V DC.

(2) Derate 16.7 mA/ °C above 30 °C (86 °F); 0.5 A @ 60 °C (140 °F).

(3) Derate 66.8 mA/ °C above 30 °C (86 °F); 2 A @ 60 °C (140 °F).

(4) Derate 133.6 mA/ °C above 30 °C (86 °F); 4 A @ 60 °C (140 °F).

Environmental Specifications

| Attribute | 1756-PLS |
|--|--|
| Temperature, operating IEC 60068-2-1 (Test Ae, Operating Cold), IEC 60068-2-2 (Test Be, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock) | 0...60 °C (32...140 °F) |
| Temperature, surrounding air, max | 60 °C (140 °F) |
| Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock) | -40...+85 °C (-40...+185 °F) |
| Relative humidity IEC 60068-2-30 (Test dB, Unpackaged Damp Heat) | 5...95% noncondensing |
| Vibration IEC 60068-2-6 (Test Fc, Operating) | 2 g @ 10...500 Hz |
| Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 30 g |
| Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock) | 50 g |
| Emissions | IEC 61000-6-4 |
| ESD immunity IEC 61000-4-2 | 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity IEC 61000-4-3 | 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz |
| EFT/B immunity IEC 61000-4-4 | ±4 kV at 5 kHz on unshielded I/O and power ports ±2 kV at 5 kHz on shielded resolver ports |
| Surge transient immunity IEC 61000-4-5 | ±1 kV line-line (DM) and ±2 kV line-earth (CM) on unshielded I/O and power ports ±2 kV line-earth (CM) on shielded resolver ports |
| Conducted RF immunity IEC 61000-4-6 | 10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz on shielded signal ports |

Certifications

| Certification (when product is marked) ⁽¹⁾ | 1756-PLS |
|---|---|
| cULus | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810. |
| CE | European Union 2014/30/EU EMC Directive, compliant with: <ul style="list-style-type: none"> • EN 61326-1; Meas./Control/Lab., Industrial Requirements • EN 61000-6-2; Industrial Immunity • EN 61000-6-4; Industrial Emissions • EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2014/35/EU LVD, compliant with: EN 61131-2; Programmable Controllers (Clause 11) |
| RCM | Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions |
| Ex | European Union 2014/34/EU ATEX Directive, compliant with: <ul style="list-style-type: none"> • EN 60079-15; Potentially Explosive Atmospheres, Protection "n" • EN 60079-0; General Requirements II 3 G Ex nA IIC T4 X Gc |
| EAC | Russian Customs Union TR CU 020/2011 EMC Technical Regulation Russian Customs Union TR CU 004/2011 LV Technical Regulation |

(1) See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

Chassis and Power Supply

1756 ControlLogix® I/O modules must be mounted in a ControlLogix chassis. Modules can be mounted in any chassis slot. Each chassis requires a power supply.

| Product | Cat. No. |
|-------------------------|--|
| Chassis | 1756-A4, 1756-A7, 1756-A10, 1756-A13, 1756-A17 |
| Power supply, standard | 1756-PA72/C, 1756-PA75/B, 1756-PB72/C, 1756-PB75/B, 1756-PC75/B, 1756-PH75/B |
| Power supply, redundant | 1756-PA75R, 1756-PB75R, 1756-PSCA2 1756-CPR2 cable |

- For more information on chassis specifications, see ControlLogix Chassis Specifications Technical Data, publication [1756-TD006](#).
- For more power supply specifications, see ControlLogix Power Supply Specifications Technical Data, publication [1756-TD005](#).
- For more information on how to choose the right power supply for your application, the [Integrated Architecture® Builder \(IAB\)](#) software from Rockwell Automation provides advanced selection assistance and a graphical interface for designing systems.

1756 Removable Terminal Blocks



Removable terminal blocks (RTBs) provide a flexible interconnection between your plant wiring and 1756 ControlLogix I/O modules. The RTB plugs into the front of the I/O module. The type of module determines which RTB you need. You can choose screw-clamp or spring-clamp RTBs.

RTBs are not shipped with I/O modules. You must order them separately. The standard housing on the front of the wiring arm is not deep enough for 2.5 mm² (14 AWG) wiring. So, if you plan to use 2.5 mm² (14 AWG) wiring, order the extended housing.



ATTENTION: If separate power sources are used, do not exceed the specified isolation voltage. See the specifications for each individual module on the preceding pages.



WARNING: Do not use the 1756-TBNHS, 1756-TBSHS, 1756-TBCHS, 1756-TBS6HS safety RTBs, and the 1756-TBES Extended-depth terminal block housing, on non-safety I/O modules.

RTB Specifications

| Attribute | 1756-TBCH, 1756-TBCHS | 1756-TBNH, 1756-TBNHS | 1756-TBSH, 1756-TBSHS | 1756-TBS6H, 1756-TBS6HS | 1756-TBE, 1756-TBES |
|--------------------------|--|--|---|--|---------------------------------------|
| Description | 36-pin cage-clamp removable terminal block with standard housing | 20-position NEMA screw-clamp removable block | 20-pin spring-clamp removable terminal block with standard housing | 36-pin spring-clamp removable terminal block with standard housing | Extended depth terminal block housing |
| Screw torque | 0.5 N•m (4.4 lb•in) | 1.36 N•m (12 lb•in) | - | - | - |
| Wire size ⁽¹⁾ | Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded shielded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Do not wire more than one conductor on any single terminal. Double wire connection: 0.33...1.3 mm ² (22...16 AWG) solid or stranded copper wire rated at 105 °C (221 °F), or greater, 1.2 mm (3/64 in.) insulation max. Do not wire more than two conductors on any single terminal. | | Single wire connection: 0.33...2.1 mm ² (22...14 AWG) solid or stranded copper wire, rated at 105 °C (221 °F) or greater, 1.2 mm (3/64 in.) insulation max. Do not wire more than one conductor on any single terminal. | | - |
| Screwdriver width | 3.2 mm (1/8 in.) | 8 mm (5/16 in.) Max | - | - | - |


(1) Maximum wire size requires extended housing, catalog number 1756-TBE.

Wiring Systems




As an alternative to purchasing an RTB and connecting the wires yourself, you can purchase one of these types of wiring systems:

- Interface modules (IFMs) that provide the output terminal blocks for digital I/O modules. Use the pre-wired cables that match the I/O module to the IFM or AIFM.
- Analog interface modules (AIFMs) that provide the output terminal blocks for analog I/O modules. Use the pre-wired cables that match the I/O module to the IFM or AIFM.

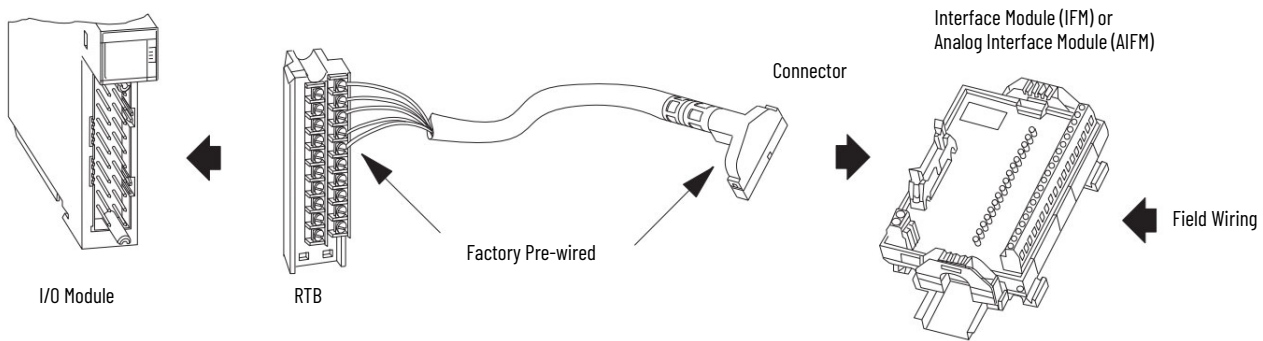

- I/O module-ready cables. One end of the cable assembly is an RTB that plugs into the front of the I/O module. The other end has individually color-coded conductors that connect to a standard terminal block.

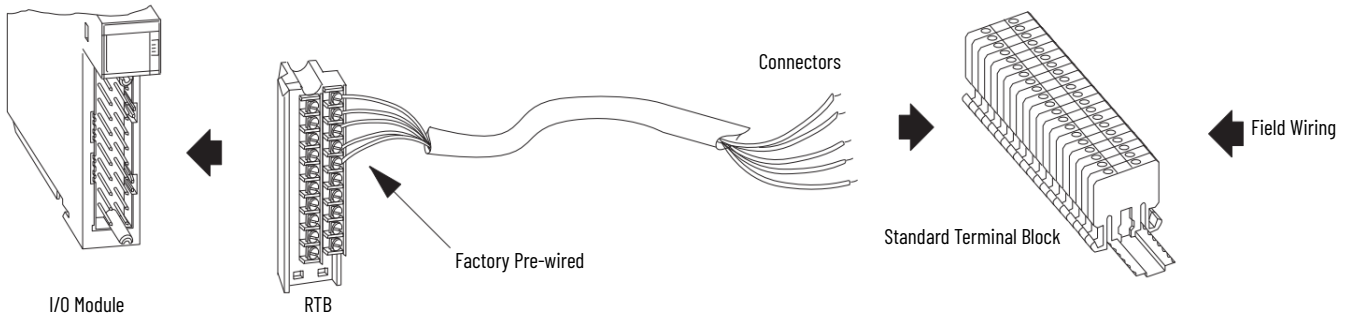

Additional Resources

These documents contain additional information concerning related products from Rockwell Automation.

| Resource | Description |
|--|---|
| ControlLogix System User Manual, publication 1756-UM001 | Describes how to use a ControlLogix system. |
| ControlLogix 5580 and GuardLogix 5580 Controllers User Manual, publication 1756-UM543 | Describes how to use a ControlLogix 5580 or GuardLogix® 5580 Controller. |
| ControlLogix Digital I/O Modules User Manual, publication 1756-UM058 | Describes how to use ControlLogix digital I/O modules. |
| ControlLogix Analog I/O Modules User Manual, publication 1756-UM009 | Describes how to use ControlLogix analog I/O modules. |
| 1756 ControlLogix Digital Safety I/O Modules User Manual, publication 1756-UM013 | Describes how to use ControlLogix digital safety I/O modules. |
| ControlLogix HART Analog I/O Modules User Manual, publication 1756-UM533 | Describes how to use ControlLogix HART Analog I/O modules. |
| ControlLogix Configurable Flowmeter Module User Manual, publication 1756-UM010 | Describes how to use a ControlLogix Configurable Flowmeter module. |
| ControlLogix High-speed Counter Module User Manual, publication 1756-UM007 | Describes how to use a ControlLogix High-speed counter module. |
| ControlLogix Programmable Limit Switch Module User Manual, publication 1756-UM002 | Describes how to use a ControlLogix Programmable Limit Switch module. |
| ControlLogix Compute Modules User Manual, publication 1756-UM003 | Describes how to use ControlLogix Compute modules. |
| Industrial Components Preventive Maintenance, Enclosures, and Contact Ratings Specifications, publication IC-TD002 | Provides a quick reference tool for Allen-Bradley industrial automation controls and assemblies. |
| Safety Guidelines for the Application, Installation, and Maintenance of Solid-State Control, publication SBI-1.1 | Designed to harmonize with NEMA Standards Publication No. ICS 1.1-1987 and provides general guidelines for the application, installation, and maintenance of solid-state control in the form of individual devices or packaged assemblies incorporating solid-state components. |
| Industrial Automation Wiring and Grounding Guidelines, publication 1770-4.1 | Provides general guidelines for installing a Rockwell Automation industrial system. |
| Product Certifications website, rok.auto/certifications . | Provides declarations of conformity, certificates, and other certification details. |

You can view or download publications at rok.auto/literature.

Rockwell Automation Support

Use these resources to access support information.

| | | |
|---|---|--|
| Technical Support Center | Find help with how-to videos, FAQs, chat, user forums, Knowledgebase, and product notification updates. | rok.auto/support |
| Local Technical Support Phone Numbers | Locate the telephone number for your country. | rok.auto/phonesupport |
| Technical Documentation Center | Quickly access and download technical specifications, installation instructions, and user manuals. | rok.auto/techdocs |
| Literature Library | Find installation instructions, manuals, brochures, and technical data publications. | rok.auto/literature |
| Product Compatibility and Download Center (PCDC) | Download firmware, associated files (such as AOP, EDS, and DTM), and access product release notes. | rok.auto/pcdc |

Documentation Feedback

Your comments help us serve your documentation needs better. If you have any suggestions on how to improve our content, complete the form at rok.auto/docfeedback.





Allen-Bradley, ControlLogix, expanding human possibility, GuardLogix, Integrated Architecture, PHOTOSWITCH, and Rockwell Automation are trademarks of Rockwell Automation, Inc.

CIP Sync and EtherNet/IP are trademarks of ODVA, Inc.

Trademarks not belonging to Rockwell Automation are property of their respective companies.

Rockwell Automation maintains current product environmental compliance information on its website at rok.auto/pec.

Rockwell Otomasyon Ticaret A.Ş. Kar Plaza İş Merkezi E Blok Kat:6 34752, İçerenköy, İstanbul, Tel: +90 (216) 5698400 EEE Yönetmeliğine Uygundur

Connect with us.    

rockwellautomation.com ————— expanding **human possibility**[®]

AMERICAS: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444

EUROPE/MIDDLE EAST/AFRICA: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640

ASIA PACIFIC: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846

UNITED KINGDOM: Rockwell Automation Ltd. Pitfield, Kiln Farm Milton Keynes, MK11 3DR, United Kingdom, Tel: (44)(1908) 838-800, Fax: (44)(1908) 261-917

Publication 1756-TD0020-EN-E - October 2022

Supersedes Publication 1756-TD002N-EN-E - November 2021

Copyright © 2022 Rockwell Automation, Inc. All rights reserved. Printed in the U.S.A.