

MOSA M12 FEMALE 0° FIELD-WIREABLE (IDC)4-pol., 0,14-0,34mm²

Female straight

M12, 4-pole


Insulation displacement technology IDC



Connection cross section: 0.14...0.34 mm²

The resistance to aggressive media should be individually tested for your application.
Further details on request.

[Link to Product](#)**Illustration**

Female

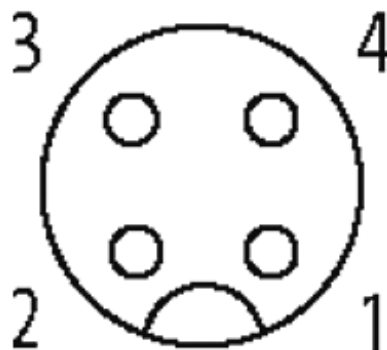

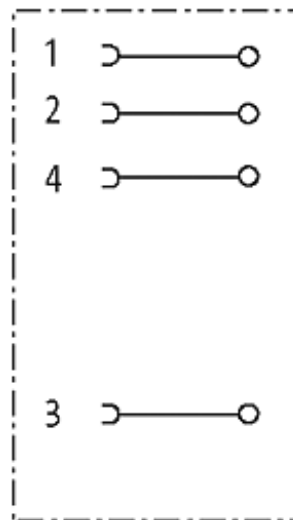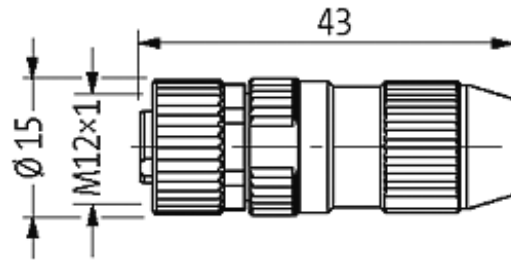

Product may differ from Image

Form

Form 12611

Technical Data

Operating voltage	max. 32 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	0.14...0.34 mm ² (conductor diameter min. 0.1 mm)
Sealing range (cable Ø)	2.9...5.1 mm
Wire isolation	PVC, PP, TPE
Outer wire Ø	1.0...1.6 mm
Locking of ports	Screw thread M12 x 1 mm (recommended torque 0.6 Nm) self-securing
Protection	IP67 inserted and tightened (EN 60529)
Reconnection (cable)	10

General data

Temperature range	-25...+85 °C
Dimensions H x W x D	43x15x15 mm

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879201742
eClass	27279221

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 07/18

Murrelektronik Ltd. | Pendlebury Industrial Estate, Albion Street, Swinton | Manchester M27 4FG | Fon +44 161 72831-33 | Fax +44 161 72831-30 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

Packaging unit

1