

1492-IFM20F-2

1492-RIFM20F-2


Feed-Through Extra Terminals (2 per I/O) 264V AC/DC Max.



Application Notes


- Compatibility** — To ensure proper operation with the I/O module, do **not** exceed the voltage and current ratings of the IFM.
- Wiring** — Refer to the Label Section on page 181. For Field-Side Wiring Diagrams, refer to the Wiring System web site information on page 186.
- Isolation** — The power bus is isolated into two groups of 10 terminals. This allows each group of the I/O devices to reference a different power source.
- Dimensions** — Refer to page 187.

Pinout

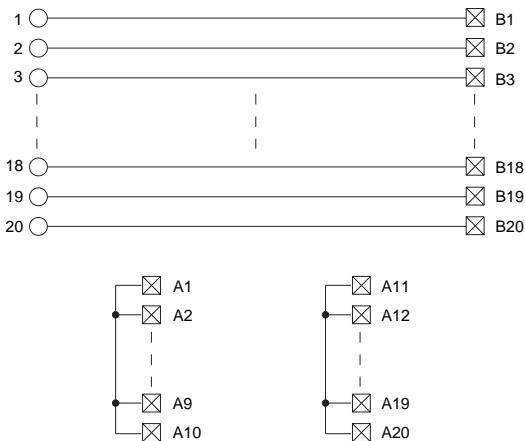

1492-IFM20F-3

Feed-Through 3-Wire Sensor Type Input Devices 132V AC/DC Max.

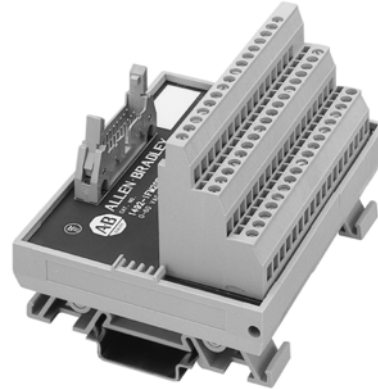

Application Notes

- Compatibility** — To ensure proper operation with the I/O module, do **not** exceed the voltage and current ratings of the IFM.
- Wiring** — Refer to the Label Section on page 181. For Field-Side Wiring Diagrams, refer to the Wiring System web site information on page 186.
- Isolation** — The power busses are connected to one common (one bus has 17 terminals, and one bus has 18 terminals). All of the input devices used must reference the same power source.
- Dimensions** — Refer to page 187.

Pinout

