

### Main

Range of product	Modicon Premium Automation platform
Accessory / separate part category	Communication accessories
Accessory / separate part type	Card
Accessory / separate part designation	PCMCIA card
Product compatibility	TSX37-21/22 TSXSCY21601
Accessory / separate part destination	Atrium co-processor Premium processor

### Complementary


Memory type	PCMCIA card type III
Physical interface	RS232 D
Communication port protocol	Character mode Modbus Uni-Telway
Current consumption	140 mA 5 V DC
Product weight	0.105 kg

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Point to Point Connection in Character Mode (DTE to DTE)

### Cabling Accessories

The RS 232 physical support card is inserted either in the processor or in the TSXSCY21601 module. It can be connected to a DTE (Data Terminal Equipment) such as a terminal or a printer through a TSXSCP CD 1030 or a TSXSCP CD 1100 cable.

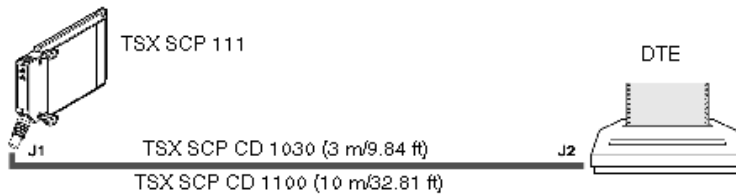

## Connection to a Uni-Telway, Modbus or Character Mode DCE

### Cabling Accessories

The PCMCIA card can be connected to a Uni-Telway, Modbus or Character Mode DCE (Data Circuit-terminating Equipment) such as a modem through a TSXSCP CC 1030 cable.

