


Logic elements


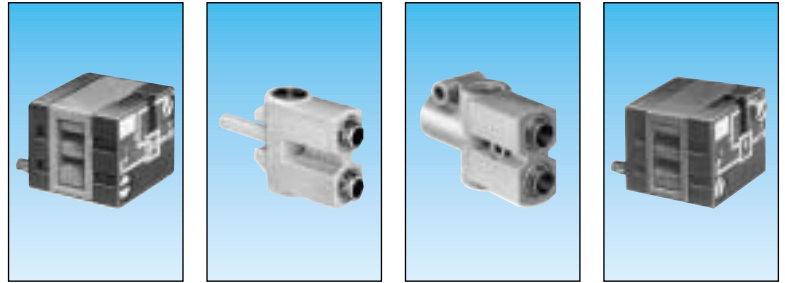


1

Part numbers

		81 521 501	81 540 001	81 540 005	81 522 501
Functions	OR	—	—	—	—
	AND	—	—	—	—
	YES	—	—	—	—
	NO	—	—	—	—
Version		On sub-base page 4/14 - 4/15	Plug-in Ø 4	Plug-in Ø 6	On sub-base page 4/14 - 4/15

Symbol




Characteristics

Push-in connection for semi-rigid tubing (NFE 49100)	Male/Female/Female Female/Female/Female	—	Ø 4 mm	—	—
Colour		Blue	Blue	Blue	Green
Operating pressure	bar	2 • 8	2 • 8	2 • 8	2 • 8
Orifice diameter	mm	2.7	2.7	4	2.7
Flow at 6 bars	NI/min	170	170	200	170
Pressure indicator		•	—	—	•
Switching time	ms	—	—	—	—
Operating temperature	°C	-5 +50	-5 +50	-5 +50	-5 +50
Mechanical life	operations	>10 ⁷	>10 ⁷	>10 ⁷	>10 ⁷
Weight	g	25	12	25	25

Pilot/pressure curves

P.p : Pilot pressure
P.a : Supply pressure

Principle of operation




OR element

The output signal "S" is present when a signal at "a" OR "b" is present

$$S = a \text{ OR } b$$

$$S = a + b$$



AND element



The output signal "S" is present only when signals "a" AND "b" are present simultaneously.

$$S = a \text{ AND } b$$


$$S = a \cdot b$$

Dimensions



81 521 501 - 81 522 501



81 540 005 - 81 541 005




81 540 001 - 81 541 001




Other information

See page 4/8 for mounting plan for logic elements.

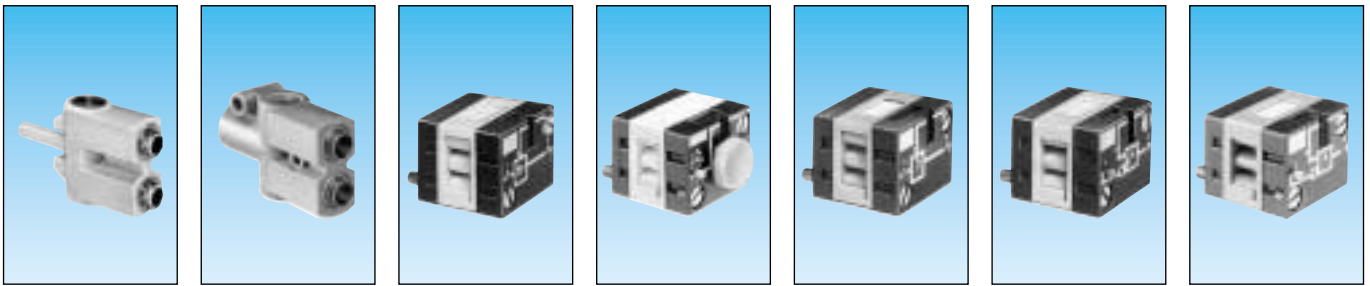


1


81 541 001	81 541 005	81 501 025	81 501 065	81 503 025	81 504 025	81 506 025
Plug-in Ø 4	Plug-in Ø 6	On sub-base page 4/14 - 4/15	Manual override On sub-base page 4/14 - 4/15	Threshold On sub-base page 4/14 - 4/15	Simple and inhibition On sub-base page 4/14 - 4/15	Threshold On sub-base page 4/14 - 4/15



Ø 4 mm	Ø 6 mm					
Green	Green	Yellow	Yellow	Orange	Light grey	Dark grey
2 • 8	2 • 8	2 • 8	2 • 8	2 • 8	2 • 8	2 • 8
2.7	4	2.7	2.7	2.7	2.7	2.7
150	200	170	170	170	170	170
-5 +50	-5 +50	-5 +50	-5 +50	-5 +50	-5 +50	-5 +50
>10 ⁷	>10 ⁷	>10 ⁷	>10 ⁷	>10 ⁷	>10 ⁷	>10 ⁷
13	25	30	35	30	30	30

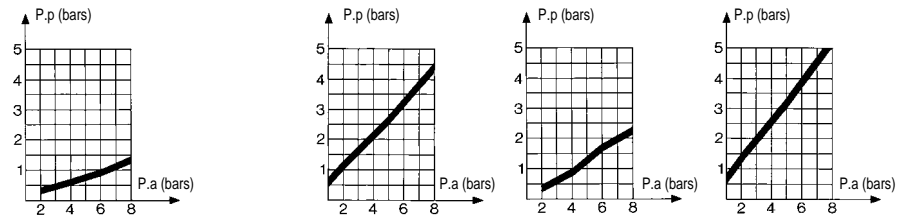

4




YES element

The output signal "S" is only present when the pilot is present :

$S = a$ YES b

$S = a$



NOT element

The output signal "s" is present only if the input signal "a" is NOT present. The output signal is therefore the inverse of the pilot signal.

$S = \bar{a}$

$S = \bar{a}$



If the supply port is connected to a 2nd input "b", the function obtained is called Inhibition.

$S = \text{NOT } a \text{ AND } b$

$S = \bar{a} \cdot b$

81 501 025 - 81 503 025
81 504 025 - 81 506 025

81 501 065

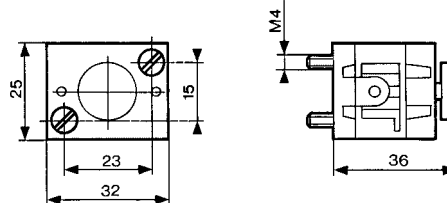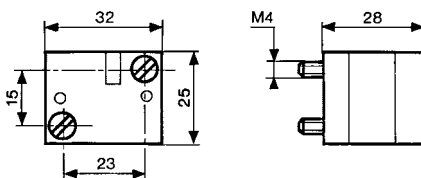

To order, specify :

Standard products

1 Part number

Example : Logic elements 81 521 501

Standard products,
non stocked