


Product datasheet

Specifications

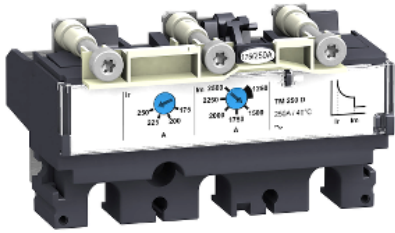

trip unit TM40D for Compact NSX 100/160 circuit breakers, thermal magnetic, rating 40 A, 3 poles 3d

LV429034

! Discontinued on: 30 September 2022

! To be discontinued

Main

Range	ComPact
Range of product	ComPact NSX100...250 ComPact NSX100...250 DC
Product or component type	Trip unit
Trip unit name	TM-D
Trip unit technology	Thermal-magnetic
Range compatibility	ComPact NSX100 ComPact NSX160 ComPact NSX100 DC
Device application	Distribution
Number of poles	3P
Protected poles description	3t
Trip unit protection functions	LI
Protection type	L : for overload protection (thermal) I : for short-circuit protection (magnetic)
Trip unit rated current	40 A at 40 °C
[Ue] rated operational voltage	690 V AC 50/60 Hz 750 V DC
Network type	AC DC
Network frequency	50/60 Hz

Complementary

Long-time pick-up adjustment type I _r (thermal protection)	Adjustable
[I _r] long-time protection pick-up adjustment range	0.7...1 x I _n
Long-time protection delay adjustment type t _r	Fixed
[T _r] long-time protection delay adjustment range	120...400 s at 1.5 x I _n 15 s at 6 x I _r
Short-time protection pick-up adjustment type I _{sd}	Fixed

[Isd] Short-time protection pick-up adjustment range	500 A
Short-time protection delay adjustment type tsd	Fixed
Earth-leakage protection	Without

Environment

Standards	UL 508 EN/IEC 60947-2
Product certifications	EAC CCC Marine
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-50...85 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	422.0 g
Package 1 Height	6.5 cm
Package 1 width	9.5 cm
Package 1 Length	11.5 cm
Unit Type of Package 2	P12
Number of Units in Package 2	224
Package 2 Weight	109.696 kg
Package 2 Height	45.0 cm
Package 2 width	80.0 cm
Package 2 Length	120.0 cm
Unit Type of Package 3	S03
Number of Units in Package 3	28
Package 3 Weight	12.212 kg
Package 3 Height	30.0 cm
Package 3 width	30.0 cm
Package 3 Length	40.0 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

WEEE

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty

18 months

Recommended replacement(s)