

Product data sheet

Specifications



multifunction relay, Harmony Timer
Relays, 8A, 1CO, 0.1s..10h, pulse
delay, 24V DC or 24...240V AC DC

RE17RMXMU

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony Timer Relays
Discrete output type	Relay
Product or Component Type	Modular timing relay
Width	0.7 in (17.5 mm)
Device short name	RE17R
Time delay type	Pulse delay Safe-guard Bistable Interval
Time delay range	6...60 s 1...10 min 0.1...1 s 1...10 h 1...10 s 6...60 min 10...100 h
nominal output current	8 A

Complementary

Contacts type and composition	1 C/O
Contacts material	Cadmium free
Height	3.5 in (90 mm)
Depth	2.8 in (72 mm)
Control type	Selector switch front panel
[Us] rated supply voltage	24...240 V AC 50/60 Hz 24 V DC
Voltage range	0.85...1.1 Us
Supply frequency	50...60 Hz +/- 5 %
release of input voltage	10 V
Connections - terminals	Screw terminals, 1 x 0.5...1 x 3.3 mm ² AWG 20...AWG 12) solid without cable end Screw terminals, 2 x 0.5...2 x 2.5 mm ² AWG 20...AWG 14) solid without cable end Screw terminals, 1 x 0.2...1 x 2.5 mm ² AWG 24...AWG 14) flexible with cable end Screw terminals, 2 x 0.2...2 x 1.5 mm ² AWG 24...AWG 16) flexible with cable end
Tightening torque	5.3...8.9 lbf.in (0.6...1 N.m) IEC 60947-1
Housing material	Polycarbonate
Repeat accuracy	+/- 0.5 % IEC 61812-1
Temperature Drift	+/- 0.05 %/°C
Voltage drift	+/- 0.2 %/V

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Setting accuracy of time delay	+/- 10 % of full scale 25 °C IEC 61812-1
Time delay type	Pulse delay - Ad- Pulse delayed relay w/ control signal Pulse delay - Ah- Pulse delayed relay (single cycle) w/ control signal Safe-guard - N- Safe-guard relay Safe-guard - O- Delayed Safe-guard relay Pulse delay - P- Pulse delayed relay w/ fixed pulse length Pulse delay - Pt- Pulse delayed relay w/ fixed pulse length and pause/summation Bistable - TI- Bistable relay w/ control signal on Bistable - Tt- Retriggerable bistable relay w/ control signal on Interval - W- Interval relay w/ control signal off
control signal pulse width	100 ms with load in parallel typical 30 ms typical
Insulation resistance	100 MΩ 500 V DC IEC 60664-1
Reset time	120 ms on de-energisation typical
On-load factor	100 %
Power consumption in VA	0...32 VA 240 V AC
Maximum power consumption in W	0.6 W 24 V DC
Minimum switching current	10 mA 5 V DC
Maximum switching current	8 A AC/DC
Maximum switching voltage	250 V AC
breaking capacity	2000 VA
operating frequency	10 Hz
Electrical durability	100000 cycles resistive 8 A 250 V AC
Mechanical durability	10000000 cycles
Dielectric strength	2.5 kV 1 mA/1 minute 50 Hz IEC 61812-1
[Uimp] rated impulse withstand voltage	5 kV 1.2/50 µs
power on delay	100 ms
Marking	CE
Creepage distance	4 kV/3 IEC 60664-1
Safety reliability data	MTTFd = 296.8 years B10d = 270000
Mounting position	Any position in relation to normal vertical mounting plane
Mounting support	35 mm DIN rail conforming to IEC 60715
Local signalling	LED indicator on steady: relay energised, no timing in progress LED indicator 80 % ON and 20 % OFF flashing: timing in progress LED indicator 5 % ON and 95 % OFF pulsing: relay de-energised, no timing in progress (except function Di-D, Li-L)
Function available	Ad- Pulse delayed relay w/ control signal-1 C/O Ah- Pulse delayed relay (single cycle) w/ control signal-1 C/O N- Safe-guard relay-1 C/O O- Delayed Safe-guard relay-1 C/O P- Pulse delayed relay w/ fixed pulse length-1 C/O Pt- Pulse delayed relay w/ fixed pulse length and pause/summation-1 C/O TI- Bistable relay w/ control signal on-1 C/O Tt- Retriggerable bistable relay w/ control signal on-1 C/O W- Interval relay w/ control signal off-1 C/O
Net Weight	0.15 lb(US) (0.07 kg)
Control Type	Without test button
Number of functions	9
Time delay type	Ad, Ah, N, O, P, Pt, TI, Tt, W

Functionality	Multifunction
Compatibility code	RE17
Environment	
Immunity to microbreaks	20 ms
Standards	2006/95/EC 2004/108/EC IEC 61000-6-1 IEC 61000-6-4 IEC 61000-6-2 IEC 61000-6-3 IEC 61812-1
Product Certifications	cULus GL CSA
Ambient Air Temperature for Storage	-22...140 °F (-30...60 °C)
Ambient Air Temperature for Operation	-4...140 °F (-20...60 °C)
IP degree of protection	IP20 IEC 60529 terminal block) IP40 IEC 60529 housing) IP50 IEC 60529 front panel)
Vibration resistance	20 m/s ² (f= 10...150 Hz) conforming to IEC 60068-2-6
Shock resistance	15 gn 11 ms IEC 60068-2-27
Relative Humidity	93 % without condensation IEC 60068-2-30
Electromagnetic compatibility	Electrostatic discharge immunity test 6 kV in contact) level 3 IEC 61000-4-2 Electrostatic discharge immunity test 8 kV in air) level 3 IEC 61000-4-2 Susceptibility to electromagnetic fields 10 V/m 80 MHz to 1 GHz) level 3 IEC 61000-4-3 Electrical fast transient/burst immunity test 1 kV capacitive connecting clip) level 3 IEC 61000-4-4 Electrical fast transient/burst immunity test 2 kV direct) level 3 IEC 61000-4-4 1.2/50 µs shock waves immunity test 1 kV differential mode) level 3 IEC 61000-4-5 1.2/50 µs shock waves immunity test 2 kV common mode) level 3 IEC 61000-4-5 Conducted RF disturbances 10 V 0.15...80 MHz) level 3 IEC 61000-4-6 Voltage dips and interruptions immunity test 0 % 1 cycle) IEC 61000-4-11 Voltage dips and interruptions immunity test 70 % 25/30 cycles) IEC 61000-4-11 Conducted and radiated emissionsclass B EN 55022

Ordering and shipping details

Category	US10CP222370
Discount Schedule	0CP2
GTIN	3606480552786
Returnability	Yes
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.181 in (3.000 cm)
Package 1 Width	3.268 in (8.300 cm)
Package 1 Length	3.780 in (9.600 cm)
Package weight(Lbs)	2.822 oz (80.000 g)
Unit Type of Package 2	S02

Number of Units in Package 2	40
Package 2 Height	5.906 in (15.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	8.089 lb(US) (3.669 kg)

Contractual warranty

Warranty (in months)	18
-----------------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	15
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	7bdc2711-0ad2-427c-8ece-532c5e9f09d7
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer

Lifetime extension

Repair	No
--------	----

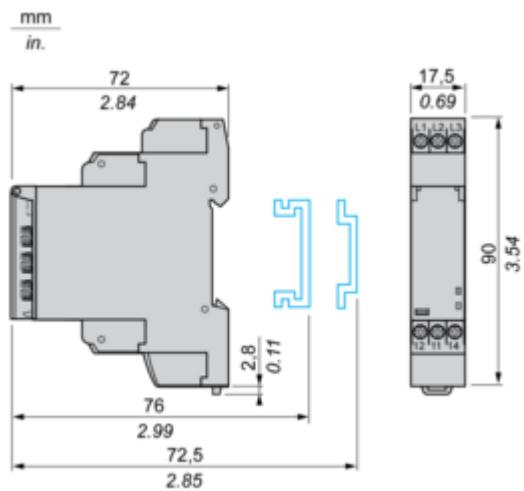
Use Again

Repack and remanufacture

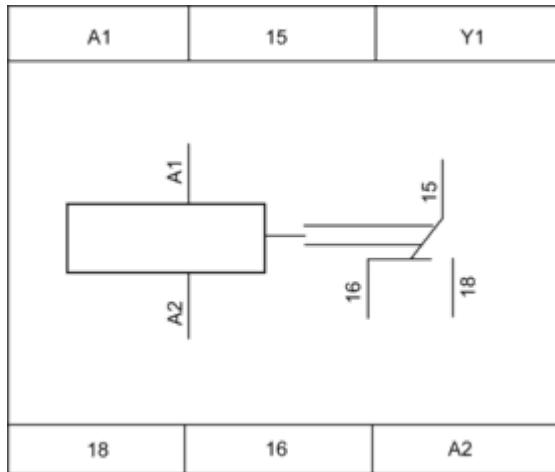
Circularity Profile	End of Life Information
Take-back	No

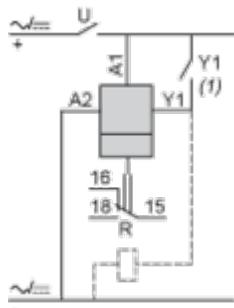
Dimensions Drawings

Width 17.5 mm



Connections and Schema

Internal Wiring Diagram

Wiring Diagram

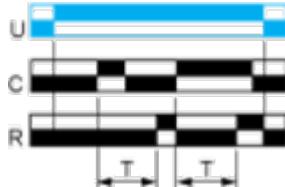
1) Contact Y1:

- Control for functions B, C, Ac, Bw, Ad, Ah, N, O, W, T, Tt.
- Partial stop for functions At, Ht and Pt.
- Function D if Di selected.
- Not used for functions A, H and P.

Technical Description

Function Ad : Pulse Delayed Relay with Control Signal**Description**

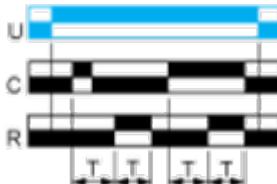
After power-up, pulsing or maintaining of control contact C starts the timing T. At the end of this timing period T, the output R closes. The output R will be reset the next time control contact C is pulsed or maintained.

Function: 1 Output

Function Ah : Pulse Delayed Relay (Single Cycle) with Control Signal

Description

After power-up, pulsing or maintaining of control contact C starts the timing T. A single cycle then starts with 2 timing periods T of equal duration (start with output in rest position).
Output R closes at the end of the first timing period T and reverts to its initial position at the end of the second timing period T.
Control contact C must be reset in order to re-start the single flashing cycle.

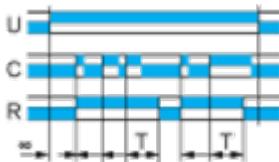
Function: 1 Output

Function N : Retriggerable Interval Relay with Control Signal On

Description

After power-up and an initial control pulse C, the output R closes.

If the interval between two control pulses C is greater than the set timing period T, timing elapses normally and the output R closes at the end of the timing period. If the interval is not greater than the set timing period, the output R remains closed until this condition is met.

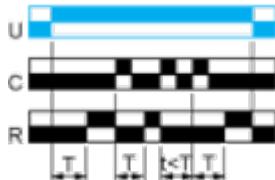
Function: 1 Output

Function O : Retriggerable Interval Delayed Relay with Control Signal On

Description

An initial timing period T begins on energisation. At the end of this timing period, the output R closes.

As soon as there is a control pulse C , the output R reverts to its initial state until the interval between two control pulses is less than the value of the set timing period T . Otherwise, the output R closes at the end of the timing period T .

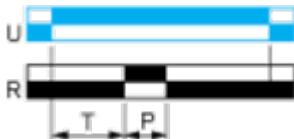
Function: 1 Output

Function P : Pulse Delayed Relay with Fixed Pulse Length

Description

The timing period T begins on energisation.

At the end of this period, the output R closes for a fixed time P.

Function: 1 Output

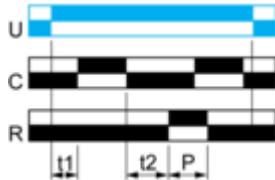
P = 500 ms

Function Pt : Pulse Delayed Relay (Summation and Fixed Pulse Length) with Control Signal Off

Description

On energisation, timing period T starts (it can be interrupted by operating the Gate control contact G). At the end of this period, the output R closes for a fixed time P.

Function: 1 Output



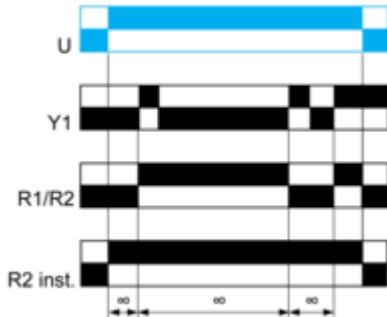
$$T = t_1 + t_2 + \dots$$

$$P = 500 \text{ ms}$$

Function TL : Bistable Relay with Control Signal On

Description

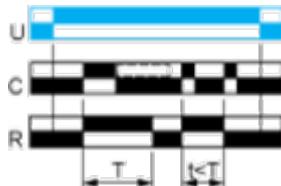
After power-up, pulsing or maintaining of control contact Y1 switches the output on.
A second pulse on the control contact Y1 switches the output relay off.



Function Tt : Retriggerable Bistable Relay with Control Signal On

Description

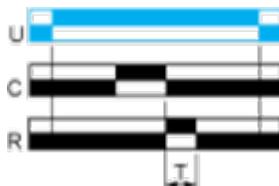
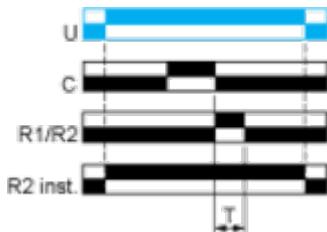
After power-up, pulsing or maintaining of control contact C switches output R on and starts timing T. The output switches off at the end of the timing period T or following a second pulse on the control contact C.

Function: 1 Output

Function W : Interval Relay with Control Signal Off

Description

After power-up and opening of the control contact, the output(s) close(s) for a timing period T. At the end of this timing period the output(s) revert(s) to its/their initial state. The second output can be either timed or instantaneous.

Function: 1 Output**Function: 2 Outputs**

2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.).

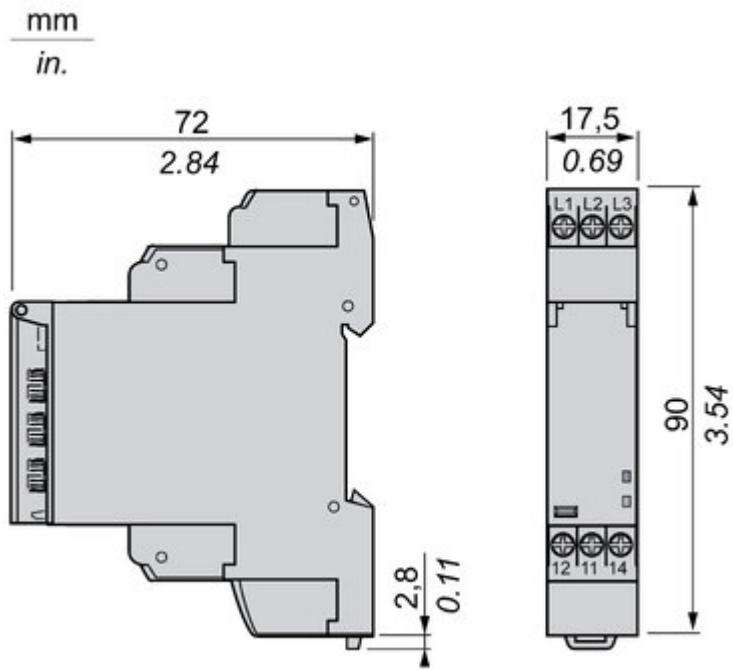
Legend

	Relay de-energised
	Relay energised
	Output open
	Output closed

C	Control contact
G	Gate
R	Relay or solid state output
R1/R2	2 timed outputs
R2 inst.	The second output is instantaneous if the right position is selected
T	Timing period
Ta -	Adjustable On-delay
Tr -	Adjustable Off-delay
U	Supply

Technical Illustration

Dimensions



Offer Marketing Illustration

Product benefits / Features

Features

Harmony Timer Relay



Diagnostic button to check downstream circuit immediately, shorten the commission and troubleshooting time.

Wide range of time delay for adjustment: from 0.01 s to 999 hrs.

Unprecedented accuracy, predictive maintenance, and superior security.

Compatible with a wide range of applications including machines, buildings, water segments, and HVAC.

Compliant with IEC 60255-1 standard, and a wide array of product certifications such as UL, CE, CSA, EAC.

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony Timer Relay

Flexible choice of screw or spring connection terminals for wiring.

One product reference covering 28 timing functions, 2 outputs, and a wide range of supply voltage 24...240 V AC/DC.

Dust and unintended human intervention avoided thanks to the IP50 lead-sealable settings protection cover.

A Dial-Pointer LED indicator that enhances ease of operation in difficult environments such as dusty or low-light conditions

Different mounting style to meet your preference:
DIN rail mount with product width:
17.5 mm/0.69 in.
22.5 mm/0.88 in.
Plug in mounting with socket



Image of product / Alternate images

Alternative







Image of product in real life situation

