



Through-beam sensor receiver

OGELFPKG/B3/V4A/US-100

Article no longer available - archive entry

Alternative articles: OGE701
When selecting an alternative article and accessories please note that technical data may differ!

1 pushbutton
2 LED \$Justierhilfe

Product characteristics		
Type of light		red light
Housing		threaded type
Application		
Special feature		Gold-plated contacts; Function check output
Function principle		Through-beam sensor
Electrical data		
Operating voltage	[V]	10...30 DC
Current consumption	[mA]	< 30
Protection class		II
Reverse polarity protection		yes
Type of light		red light
Wave length	[Nm]	675



Through-beam sensor receiver

OGELFPKG/B3/V4A/US-100



Outputs		
Electrical design	PNP	
Output function	light-on/dark-on mode; (parameterisable)	
Max. voltage drop switching output DC [V]	2.5	
Function check output	yes	
Max. voltage drop of function check output [V]	3.5	
Max. current load for function check output [mA]	10	
Permanent current rating of switching output DC [mA]	200	
Switching frequency DC [Hz]	500	
Short-circuit protection	yes	
Type of short-circuit protection	pulsed	
Overload protection	yes	
Detection zone		
Transmitter / receiver	receiver	
Range [m]	< 2	
Range adjustable	yes	
Diameter of the smallest detectable object [mm]	0.5	
Operating conditions		
Ambient temperature [°C]	-10...50	
Protection	IP 67	
Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
Mechanical data		
Housing	threaded type	
Dimensions [mm]	M18 x 1 / L = 72	
Thread designation	M18 x 1	
Materials	stainless steel (1.4404 / 316L); PBT	
Lens material	PMMA	
Displays / operating elements		
Display	switching status	1 x LED, yellow
	operation	1 x LED, green
	function	1 x LED, red
Accessories		
Items supplied	lock nuts: 2 x	
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
Connector: 1 x M12; Contacts: gold-plated		

Through-beam sensor receiver

OGELFPKG/B3/V4A/US-100



Connection

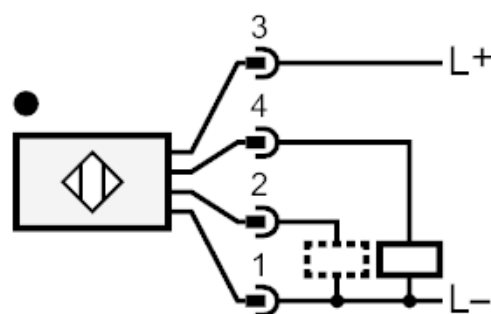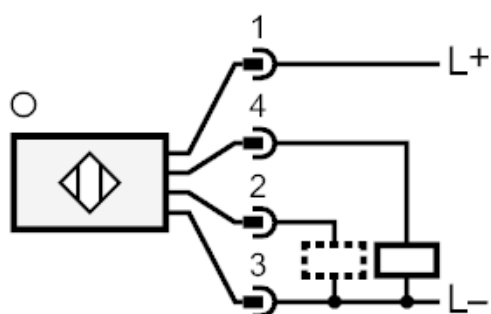

2

Function check output