



# Solenoid valve 2/2 way Normally Open, With pilot control, Brass, NBR = Buna, EPDM, FKM = Viton

21WA3Z0B130

÷

21WA4Z0B130

## PRESENTATION:

S.V. with pilot control for interception of fluids compatible with the construction materials.

A minimum operational pressure of 0,2 bar is required. The materials used and the tests carried out ensure maximum reliability and duration.

**USE:** Automation  
Heating

**PIPE:** G 3/8 - G 1/2

**COILS:** 8W - Ø 13  
BDA - BDS - BSA 155°C (class F)  
BDP 160°C (high temperature)  
BDF - BDV 180°C (class H)


**MOULDING AND BOBBIN ARE MADE BY 100% VIRGIN MATERIAL.**

Max. allowable pressure (PS) 20 bar  
Environment temperature:  
with coil class F or high temperature - 10°C + 60°C  
with coil class H - 10°C + 80°C



Gaskets	Temperature		Medium
<b>B</b> =NBR (nitrile rubber)	- 10°C	+ 90°C	Air, inert gas, water
<b>E</b> =EPDM (ethylene-propylene)	- 10°C	+140°C	Water, low pressure steam
<b>V</b> =FKM (fluoroelastomer)	- 10°C	+140°C	Mineral oils (2°E), gasoline gas oil

For seals other than NBR replace the letter "B" with the ones corresponding to the other seals. E.I. 21WA3Z0V130.

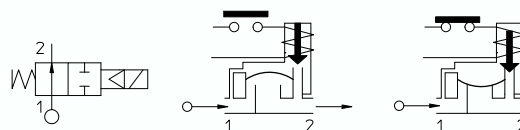

Pipe ISO 228/1	Code	Max viscosity		Ø mm	Kv l/mn	Power (watt)	Pressure		
		cSt	°E				min bar	M.O.P.D. AC bar DC bar	
G 3/8	21WA3Z0B130	12	~ 2	13	60	8	0,2	16	16
G 1/2	21WA4Z0B130				70				

## IDROENERGIAITALIA

Master distributor ODE

Sede Legale

Registered Office

00195 Roma (RM) Via Carlo Mirabello, 14

Ufficio Commerciale e sede logistica

Commercial and Logistic Office

73100 Lecce (LE) - Via Parini, 48

Tel: +39 0832090005

e-mail: info@idroenergiaitalia.it

negozio@elettrovalvole.info

**MATERIALS:**

**Body** Brass - UNI EN 12165 CW617N  
**Armature tube** Stainless steel AISI series 300  
**Fixed core** Stainless steel AISI series 400  
**Plunger** Stainless steel AISI series 400  
**Phase displacement ring** Copper - Cu 99,9%  
**Spring** Stainless steel AISI series 300  
**Seal** Standard: B=NBR  
 On request: E=EPDM V=FKM  
**Orifice** Brass - UNI EN 12165 CW617N

**On request:** Pg 9 or Pg 11  
**Connector** ISO 4400  
**Connector conformity**

**FEATURES:**

**Electrical conformity** IEC 335  
**Protection degree** IP 65 EN 60529 (DIN 40050)  
 with coil fitted by connector.

**SPARE PARTS:**


- 1. Coil:** See coils list
- 2. Complete plunger:** Code R450886/B
- 3. Complete armature tube:** Code R450606
- 4. Gasket O-Ring:**
  - G 3/4-G 1 Code R990002/B
  - G 1 1/4-G 1 1/2 Code R990005/B
  - G 2 Code R990081/B
- 5. Complete diaphragm:**
  - G 3/4-G 1 Code R450431/B
  - G 1 1/4-G 1 1/2 Code R450466/B
  - G 2 Code R450432/B

**KIT:**


KT130KB30-A=2+3

**MAINTENANCE KIT:**

G 3/4-G 1  
 KTG0W3KB19=2+4+5  
 G 1 1/4-G 1 1/2  
 KTG0W5KB35=2+4+5  
 G 2  
 KTG0W7KB50=2+4+5

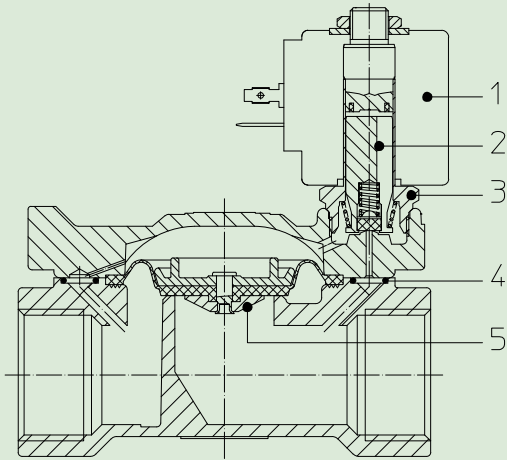

**DIMENSIONS:**

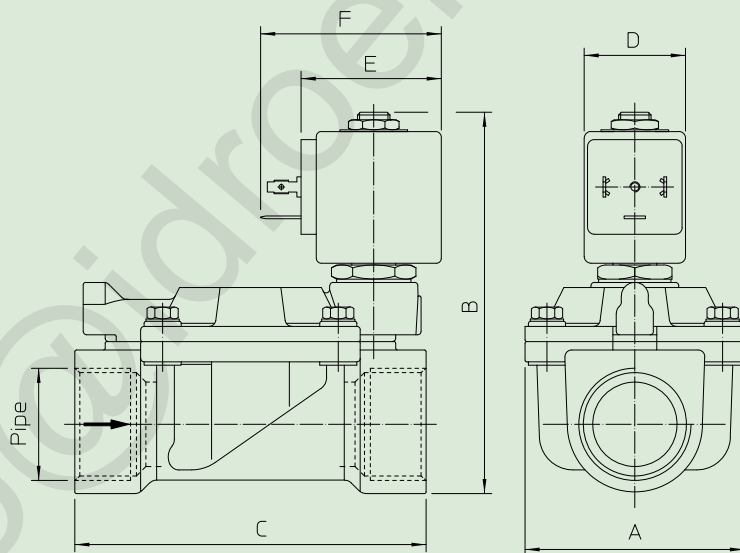

Type	Pipe ISO 228/1	A mm	B mm	C mm
21W3KB190	G 3/4	65	105	104
21W4KB250	G 1		112	
21W5KB350	G 1 1/4	98	125	144
21W6KB400	G 1 1/4			
21W7KB500	G 2	118	141	172

COIL W ---	POWER ABSORPTION		TYPE	DIMENSIONS		
	Inrush VA ~	Hold VA ~		D mm	E mm	F mm
8 W	25	14,5	B	30	42	54