


# O5D100



## Photoelectric distance sensor

O5DLCPKG/US

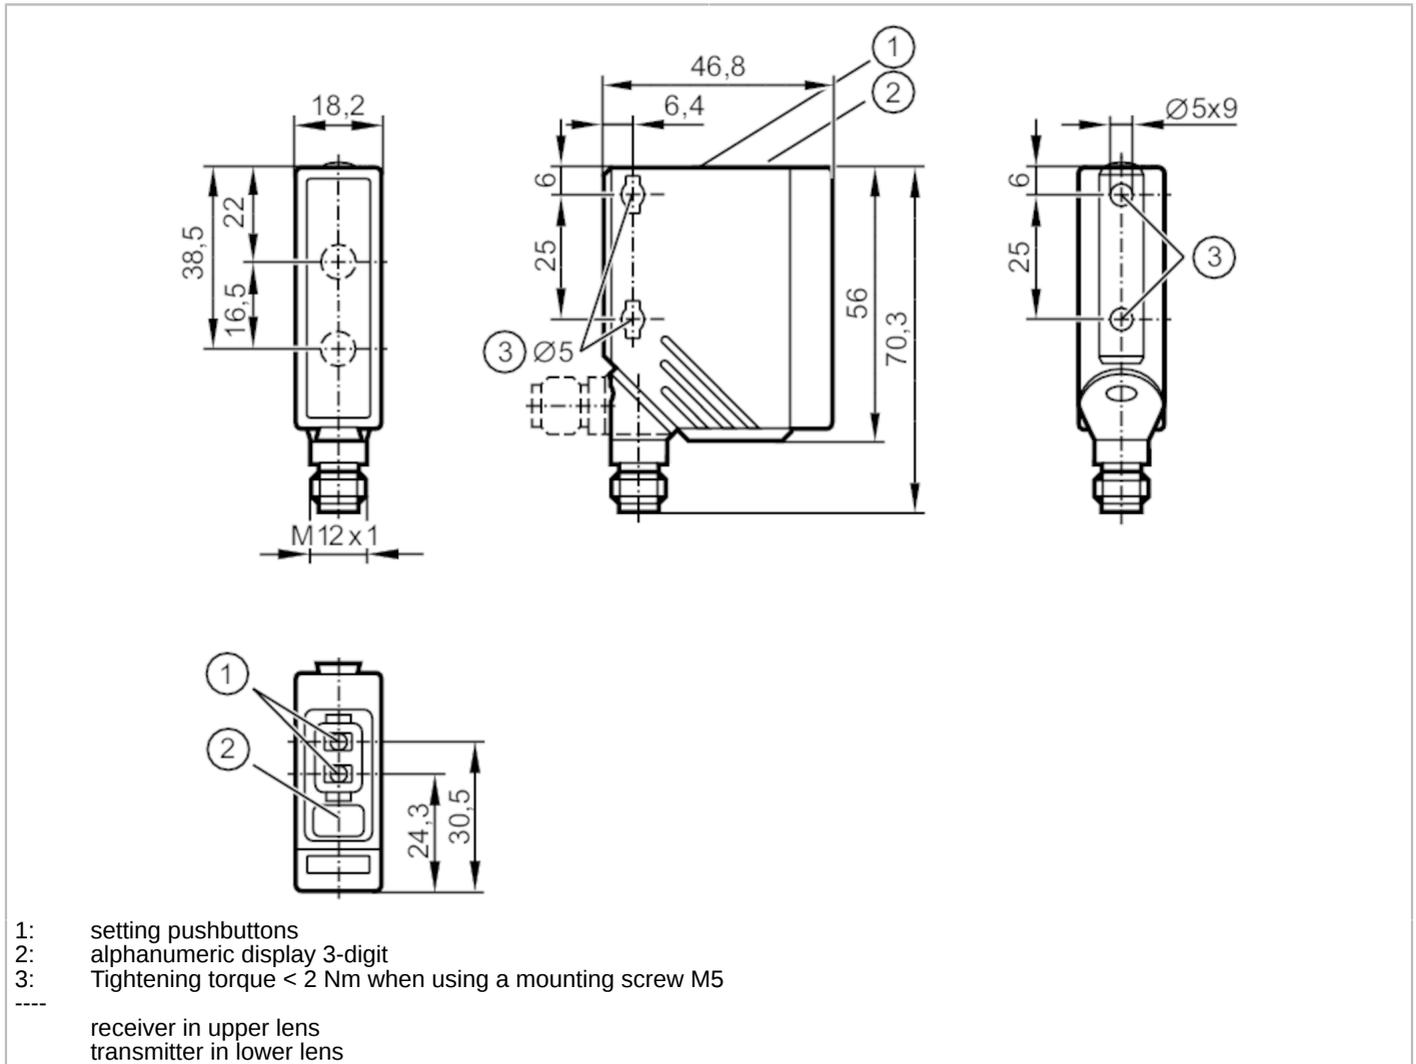

### Product characteristics

Type of light	red light
Laser protection class	2
Housing	rectangular

### Application

Special feature	Background suppression
-----------------	------------------------

### Electrical data

Operating voltage	[V]	10...30 DC; ("supply class 2" to cULus)
Current consumption	[mA]	75; (24 V)
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	650
Typ. lifetime	[h]	50000

# O5D100



## Photoelectric distance sensor

O5DLCPKG/US

Inputs / outputs	
Number of inputs and outputs	Number of digital outputs: 2
Outputs	
Total number of outputs	2
Electrical design	PNP
Number of digital outputs	2
Output function	normally open / normally closed; (complementary)
Max. current load per output [mA]	100
Switching frequency DC [Hz]	11
Short-circuit protection	yes
Type of short-circuit protection	pulsed
Overload protection	yes
Detection zone	
Max. light spot diameter [mm]	5
Light spot dimensions refer to	2 m
Detection range hysteresis [%]	< 2.5
Note on monitoring range hysteresis	black 6% remission
Background suppression available	yes
Background suppression [m]	< 20
Measuring/setting range	
Measuring range [m]	0.03...2
Sampling rate [Hz]	33
Interfaces	
Communication interface	IO-Link
Transmission type	COM2 (38,4 kBaud)
IO-Link revision	1.1
SDCI standard	IEC 61131-9
Profiles	Smart Sensor - SSP 0 Generic Profiled Sensor
Function	Multiple switching signal
Function	Process data variable
SIO mode	yes
Process data analogue	1
Process data binary	1
Min. process cycle time [ms]	6.4
Supported DeviceIDs	<b>Type of operation</b> default
	<b>DeviceID</b> 372
Operating conditions	
Ambient temperature [°C]	-25...60
Note on ambient temperature	at ta < -10 °C warm-up is necessary, laser is off
Protection	IP 65; IP 67
Max. immunity to extraneous light [klx]	10; (on the object)

# O5D100



## Photoelectric distance sensor

O5DLCPKG/US

Tests / approvals		
EMC	EN 60947-5-2	
Vibration resistance	DIN EN 60068-2-6	10 g (10...55 Hz) / 120 min. per axis (x, y, z)
Shock resistance	DIN EN 60068-2-27	50 g 6 shocks / 11 ms half-sine (x, y, z)
Laser protection class		2
Notes on laser protection	Caution:	laser light
	Power:	<= 4,0 mW
	Wave length:	650 nm
	pulse:	1,3 ns
	Do not stare into beam.	
	Avoid exposure to the laser light.	
	laser class:	2
		EN / IEC60825-1:2007 EN / IEC60825-1:2014 Complies with 21 CFR 1040.10 except for conformance with IEC 60825-1 Ed. 3, as described in Laser Notice No. 56, dated May 8, 2019.
MTTF [years]		151

Mechanical data		
Weight [g]		61.6
Housing		rectangular
Dimensions [mm]		56 x 18.2 x 46.8
Materials		housing: PA; bezel: stainless steel; operator interface: TPU; lens: PMMA
Lens alignment		side lens

Displays / operating elements		
Display	switching status	LED, yellow switching output PIN 4
	operation	LED, green
	display	alphanumeric display, 3-digit
Display unit		cm

Remarks		
Pack quantity		1 pcs.

### Electrical connection

Connector: 1 x M12; coding: A






## Photoelectric distance sensor

O5DLCPKG/US

### Connection

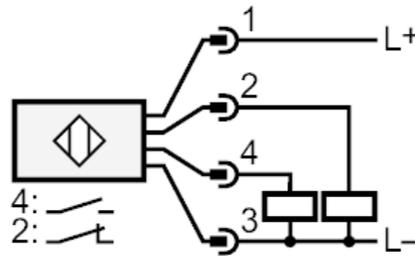

4: OUT / IO-Link

### Other data

#### accuracy


	accuracy			
distance	black (6 % remission)	white (90 % remission)		
0 mm	± 15 mm	± 15 mm		
500 mm	± 15 mm	± 15 mm		
1000 mm	± 15 mm	± 15 mm		
1500 mm	± 20 mm	± 20 mm		
2000 mm	± 30 mm	± 20 mm		

Extraneous light on the object

< 10 klx

### Diagrams and graphs

#### hysteresis graph

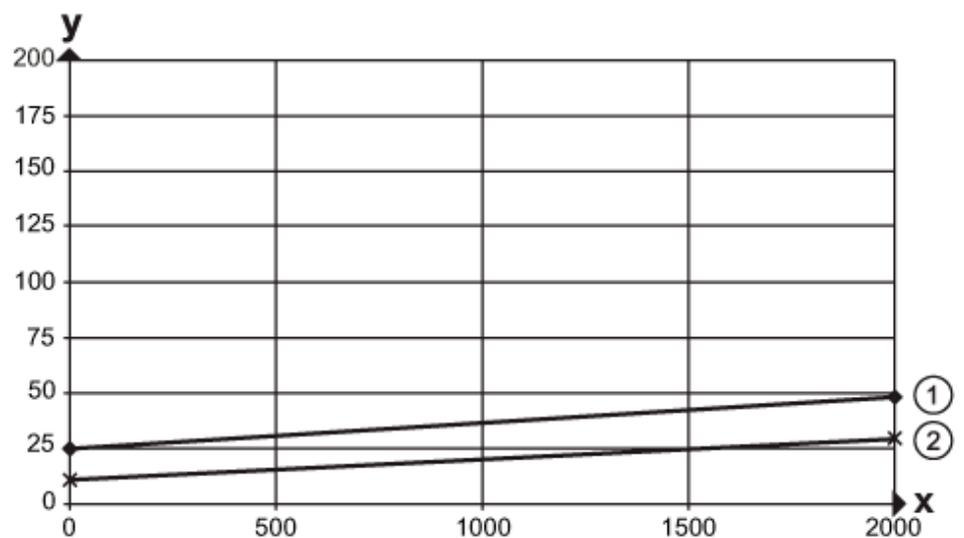

x: distance [mm]

y: Hysteresis [mm]

1 = background black 6% remission

2 = background white 90% remission