


# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Double-level terminal block, Current and voltage are determined by the plug used., nom. voltage: 500 V, nominal current: 22 A, connection method: Plug-in connection, 1st and 2nd level connection left, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, mounting type: NS 35/15, NS 35/7,5, color: gray

## Your advantages

- Tested for railway applications
- Connection with standard COMBI plugs

## Commercial Data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 3061486             |
| Packing unit                         | 50 pc               |
| Minimum order quantity               | 50 pc               |
| Sales Key                            | BE2141              |
| Product Key                          | BE2141              |
| Catalog Page                         | Page 293 (C-1-2019) |
| GTIN                                 | 4046356587990       |
| Weight per Piece (including packing) | 12.69 g             |
| Weight per Piece (excluding packing) | 12.69 g             |
| Customs tariff number                | 85369010            |
| Country of origin                    | PL                  |

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Technical Data

### Notes

|         |                                                      |
|---------|------------------------------------------------------|
| General | Current and voltage are determined by the plug used. |
|---------|------------------------------------------------------|

### Product properties

|                       |                        |
|-----------------------|------------------------|
| Product type          | Plug-in terminal block |
| Area of application   | Railway industry       |
|                       | Machine building       |
|                       | Plant engineering      |
| Number of connections | 4                      |
| Number of rows        | 2                      |
| Potentials            | 2                      |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|                                                 |        |
|-------------------------------------------------|--------|
| Rated surge voltage                             | 6 kV   |
| Maximum power dissipation for nominal condition | 0.77 W |

### Connection data

|                                 |                     |
|---------------------------------|---------------------|
| Number of connections per level | 2                   |
| Nominal cross section           | 2.5 mm <sup>2</sup> |

### 1st and 2nd level connection left

|                                                                                           |                                              |
|-------------------------------------------------------------------------------------------|----------------------------------------------|
| Connection in acc. with standard                                                          | IEC 61984                                    |
| Conductor cross section solid                                                             | 0.08 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Cross section AWG                                                                         | 28 ... 12 (converted acc. to IEC)            |
| Conductor cross section flexible                                                          | 0.08 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section, flexible [AWG]                                                   | 28 ... 14 (converted acc. to IEC)            |
| Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)                   | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Flexible conductor cross section (ferrule with plastic sleeve)                            | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm <sup>2</sup>                          |
| Nominal current                                                                           | 22 A                                         |
| Maximum load current                                                                      | 22 A                                         |
| Nominal voltage                                                                           | 500 V                                        |
| Nominal cross section                                                                     | 2.5 mm <sup>2</sup>                          |

### Dimensions

|                 |        |
|-----------------|--------|
| Width           | 5.2 mm |
| End cover width | 2.2 mm |

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

|                  |         |
|------------------|---------|
| Height NS 35/15  | 55 mm   |
| Height NS 35/7,5 | 47.5 mm |
| Length           | 98.8 mm |

## Material specifications

|                                                                         |             |
|-------------------------------------------------------------------------|-------------|
| Color                                                                   | gray        |
| Flammability rating according to UL 94                                  | V0          |
| Insulating material group                                               | I           |
| Insulating material                                                     | PA          |
| Static insulating material application in cold                          | -60 °C      |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C      |
| Relative insulation material temperature index (Elec., UL 746 B)        | 130 °C      |
| Fire protection for rail vehicles (DIN EN 45545-2) R22                  | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23                  | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24                  | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26                  | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354)                        | 28 MJ/kg    |
| Surface flammability NFPA 130 (ASTM E 162)                              | passed      |
| Specific optical density of smoke NFPA 130 (ASTM E 662)                 | passed      |
| Smoke gas toxicity NFPA 130 (SMP 800C)                                  | passed      |

## Electrical tests

### Surge voltage test

|                                                  |             |
|--------------------------------------------------|-------------|
| Test voltage setpoint                            | 7.3 kV      |
| Result                                           | Test passed |
| Short-time withstand current 2.5 mm <sup>2</sup> | 0.3 kA      |
|                                                  | 0.48 kA     |
| Result                                           | Test passed |

## Mechanical properties

### Mechanical data

|                 |     |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

## Mechanical tests

### Attachment on the carrier

|                         |             |
|-------------------------|-------------|
| DIN rail/fixing support | NS 35       |
| Test force setpoint     | 1 N         |
| Result                  | Test passed |

## Environmental and real-life conditions

### Needle-flame test

|                  |      |
|------------------|------|
| Time of exposure | 30 s |
|------------------|------|

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

|        |             |
|--------|-------------|
| Result | Test passed |
|--------|-------------|

## Oscillation/broadband noise

|                        |                                                     |
|------------------------|-----------------------------------------------------|
| Specification          | DIN EN 50155 (VDE 0115-200):2008-03                 |
| Spectrum               | Service life test category 1, class B, body mounted |
| Frequency              | $f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$      |
| ASD level              | 0.02g <sup>2</sup> /Hz                              |
| Acceleration           | 0.8g                                                |
| Test duration per axis | 5 h                                                 |
| Test directions        | X-, Y- and Z-axis                                   |
| Result                 | Test passed                                         |

## Shocks

|                                |                                     |
|--------------------------------|-------------------------------------|
| Specification                  | DIN EN 50155 (VDE 0115-200):2008-03 |
| Pulse shape                    | Half-sine                           |
| Acceleration                   | 5g                                  |
| Shock duration                 | 30 ms                               |
| Number of shocks per direction | 3                                   |
| Test directions                | X-, Y- and Z-axis (pos. and neg.)   |
| Result                         | Test passed                         |

## Ambient conditions

|                                          |                                                                           |
|------------------------------------------|---------------------------------------------------------------------------|
| Ambient temperature (operation)          | -60 °C (max. operating temperature see derating curve)                    |
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly)           | -5 °C ... 70 °C                                                           |
| Ambient temperature (actuation)          | -5 °C ... 70 °C                                                           |
| Permissible humidity (storage/transport) | 30 % ... 70 %                                                             |

## Standards and regulations

|                                  |           |
|----------------------------------|-----------|
| Connection in acc. with standard | IEC 61984 |
|----------------------------------|-----------|

## Mounting

|               |           |
|---------------|-----------|
| Mounting type | NS 35/15  |
|               | NS 35/7,5 |


# Double-level terminal block - STTB 2,5/4P

3061486


<https://www.phoenixcontact.com/fr/produits/3061486>

## Drawings

Circuit diagram

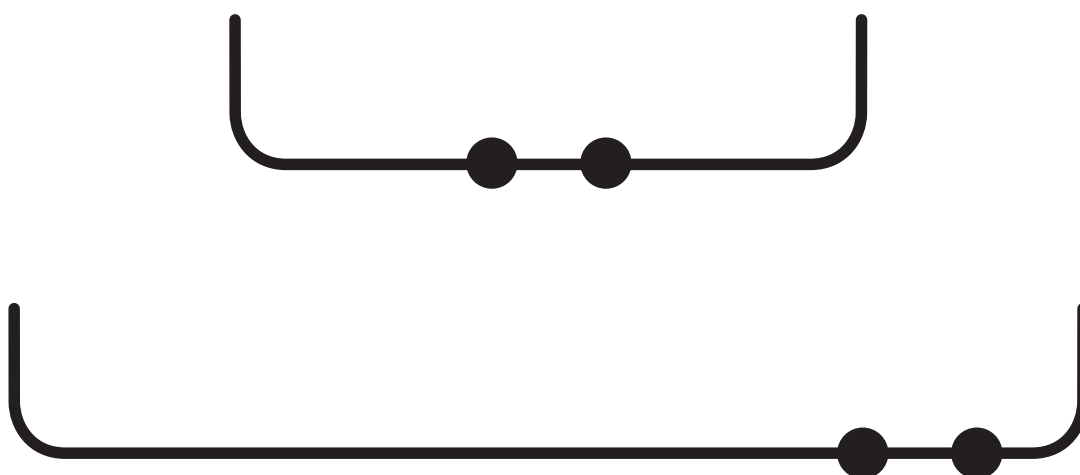

Diagram

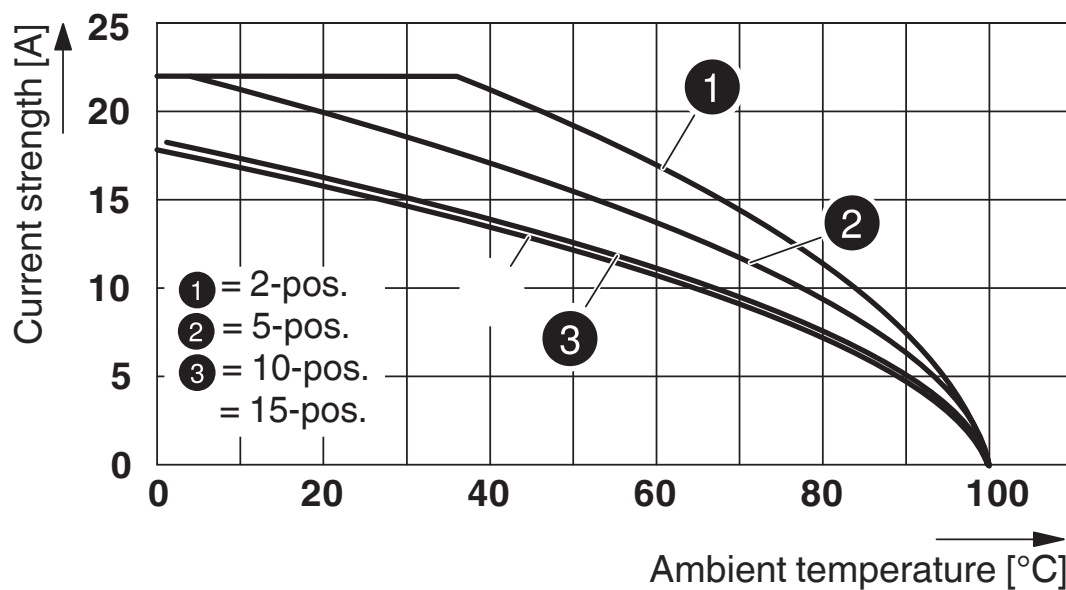

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Approvals

|  <b>CSA</b><br>Approval ID: 13631 |                       |                       |                   |                             |
|--------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                                                                                                                    | Nominal Voltage $U_N$ | Nominal Current $I_N$ | Cross Section AWG | Cross Section $\text{mm}^2$ |
| Use group B                                                                                                        |                       |                       |                   |                             |
|                                                                                                                    | 300 V                 | 20 A                  | 28 - 12           | -                           |
| Use group C                                                                                                        |                       |                       |                   |                             |
|                                                                                                                    | 300 V                 | 20 A                  | 28 - 12           | -                           |
| Use group D                                                                                                        |                       |                       |                   |                             |
|                                                                                                                    | 600 V                 | 5 A                   | 28 - 12           | -                           |

|  <b>EAC</b><br>Approval ID: RU C-DE.BL08.B.00644 |  |  |  |  |
|-----------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
|-----------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|

|  <b>cULus Recognized</b><br>Approval ID: E60425 |                       |                       |                   |                             |
|------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                                                                                                                                    | Nominal Voltage $U_N$ | Nominal Current $I_N$ | Cross Section AWG | Cross Section $\text{mm}^2$ |
| Use group B                                                                                                                        |                       |                       |                   |                             |
|                                                                                                                                    | 300 V                 | 20 A                  | -                 | -                           |
| Use group C                                                                                                                        |                       |                       |                   |                             |
|                                                                                                                                    | 300 V                 | 20 A                  | -                 | -                           |
| Use group D                                                                                                                        |                       |                       |                   |                             |
|                                                                                                                                    | 600 V                 | 5 A                   | -                 | -                           |

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Classifications

### ECLASS

|               |          |
|---------------|----------|
| ECLASS-9.0    | 27141120 |
| ECLASS-10.0.1 | 27141120 |
| ECLASS-11.0   | 27141120 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC000897 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Environmental Product Compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Accessories

 Note: Applying some accessories below might limit this product.

### Plug-in bridge

Plug-in bridge - FBS 2-5 - 3030161

<https://www.phoenixcontact.com/fr/produits/3030161>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, length: 23 mm, color: red

 Max. current carrying capacity: 24 A

---

### Plug-in bridge

Plug-in bridge - FBS 3-5 - 3030174

<https://www.phoenixcontact.com/fr/produits/3030174>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, length: 23 mm, color: red

 Max. current carrying capacity: 24 A

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug-in bridge

Plug-in bridge - FBS 4-5 - 3030187

<https://www.phoenixcontact.com/fr/produits/3030187>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, length: 23 mm, color: red

 Max. current carrying capacity: 24 A

---

## Plug-in bridge

Plug-in bridge - FBS 5-5 - 3030190

<https://www.phoenixcontact.com/fr/produits/3030190>



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, length: 23 mm, color: red

 Max. current carrying capacity: 24 A

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>



## Plug-in bridge

Plug-in bridge - FBS 10-5 - 3030213

<https://www.phoenixcontact.com/fr/produits/3030213>

Plug-in bridge, pitch: 5.2 mm, number of positions: 10, length: 23 mm, color: red



 Max. current carrying capacity: 24 A

## Plug-in bridge

Plug-in bridge - FBS 20-5 - 3030226

<https://www.phoenixcontact.com/fr/produits/3030226>

Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: red



 Max. current carrying capacity: 24 A

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug-in bridge

Plug-in bridge - FBS 50-5 - 3038930

<https://www.phoenixcontact.com/fr/produits/3038930>



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: red

 Max. current carrying capacity: 24 A

---

## Plug-in bridge

Plug-in bridge - FBS 2-5 BU - 3036877

<https://www.phoenixcontact.com/fr/produits/3036877>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: blue

 Max. current carrying capacity: 24 A

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug-in bridge

Plug-in bridge - FBS 3-5 BU - 3036880

<https://www.phoenixcontact.com/fr/produits/3036880>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: blue

 Max. current carrying capacity: 24 A

---

## Plug-in bridge

Plug-in bridge - FBS 4-5 BU - 3036893

<https://www.phoenixcontact.com/fr/produits/3036893>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: blue

 Max. current carrying capacity: 24 A

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug-in bridge

Plug-in bridge - FBS 5-5 BU - 3036903

<https://www.phoenixcontact.com/fr/produits/3036903>



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: blue

 Max. current carrying capacity: 24 A

---

## Plug-in bridge

Plug-in bridge - FBS 10-5 BU - 3036916

<https://www.phoenixcontact.com/fr/produits/3036916>



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: blue

 Max. current carrying capacity: 24 A

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug-in bridge

Plug-in bridge - FBS 20-5 BU - 3036929

<https://www.phoenixcontact.com/fr/produits/3036929>

Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: blue



 Max. current carrying capacity: 24 A

---

## Plug-in bridge

Plug-in bridge - FBS 50-5 BU - 3032114

<https://www.phoenixcontact.com/fr/produits/3032114>

Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: blue



 Max. current carrying capacity: 24 A

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug-in bridge

Plug-in bridge - FBS 2-5 GY - 3038969

<https://www.phoenixcontact.com/fr/produits/3038969>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: gray

 Max. current carrying capacity: 24 A

---

## Plug-in bridge

Plug-in bridge - FBS 3-5 GY - 3038972

<https://www.phoenixcontact.com/fr/produits/3038972>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: gray

 Max. current carrying capacity: 24 A

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug-in bridge

Plug-in bridge - FBS 4-5 GY - 3038985

<https://www.phoenixcontact.com/fr/produits/3038985>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: gray

 Max. current carrying capacity: 24 A

---

## Plug-in bridge

Plug-in bridge - FBS 5-5 GY - 3038998

<https://www.phoenixcontact.com/fr/produits/3038998>



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: gray

 Max. current carrying capacity: 24 A

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug-in bridge

Plug-in bridge - FBS 10-5 GY - 3039007

<https://www.phoenixcontact.com/fr/produits/3039007>

Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: gray



 Max. current carrying capacity: 24 A

---

## Plug-in bridge

Plug-in bridge - FBS 20-5 GY - 3038671

<https://www.phoenixcontact.com/fr/produits/3038671>

Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: gray



 Max. current carrying capacity: 24 A

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug-in bridge

Plug-in bridge - FBS 50-5 GY - 3032127

<https://www.phoenixcontact.com/fr/produits/3032127>



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: gray

 Max. current carrying capacity: 24 A

---

## Plug-in bridge

Plug-in bridge - FBSR 2-5 - 3033702

<https://www.phoenixcontact.com/fr/produits/3033702>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 17.5 A

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug-in bridge

Plug-in bridge - FBSR 3-5 - 3001591

<https://www.phoenixcontact.com/fr/produits/3001591>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 17.5 A

---

## Plug-in bridge

Plug-in bridge - FBSR 4-5 - 3001592

<https://www.phoenixcontact.com/fr/produits/3001592>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 17.5 A

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug-in bridge

Plug-in bridge - FBSR 5-5 - 3001593

<https://www.phoenixcontact.com/fr/produits/3001593>

Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: red



 Max. current carrying capacity: 17.5 A

---

## Plug-in bridge

Plug-in bridge - FBSR 10-5 - 3033710

<https://www.phoenixcontact.com/fr/produits/3033710>

Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: red



 Max. current carrying capacity: 17.5 A

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Potential bridge

Potential bridge - FBS-PV - 3032185

<https://www.phoenixcontact.com/fr/produits/3032185>

Vertical potential bridge, to connect the upper and lower level



---

## End cover

End cover - D-STTB 2,5/4P - 3061538

<https://www.phoenixcontact.com/fr/produits/3061538>

End cover, length: 98.9 mm, width: 2.2 mm, height: 47.5 mm, color: gray



# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Partition plate

Partition plate - ATP-STTB 4 - 3030747

<https://www.phoenixcontact.com/fr/produits/3030747>

Partition plate, length: 88.7 mm, width: 2 mm, height: 53 mm, color: gray



---

## Coding star

Coding star - PC - 3040588

<https://www.phoenixcontact.com/fr/produits/3040588>

Coding star, length: 3 mm, width: 3 mm, height: 6 mm, color: red



# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>



## Mounting material

Mounting material - ST-IL - 3039900

<https://www.phoenixcontact.com/fr/produits/3039900>

Operating decal for the ST terminal block



---

## Actuation tool

Actuation tool - ST-BW - 1207608

<https://www.phoenixcontact.com/fr/produits/1207608>

Actuation tool, for all 2.5 mm<sup>2</sup> - 4.0 mm<sup>2</sup> spring-cages



# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Filler plugs

Filler plugs - CEC 2,5 - 3062757

<https://www.phoenixcontact.com/fr/produits/3062757>



Cover for conductor shaft, 10-pos., for spring cage terminal blocks (ST) and terminal blocks with push-in technology (PT) with a width of 5.2 mm

---

## Component connector

Component connector - P-CO 2-5 R47K - 3032447

<https://www.phoenixcontact.com/fr/produits/3032447>



Component connector, with 47 kOhm resistance for wire-break monitoring, pitch: 5.2 mm, length: 8.9 mm, width: 4.1 mm, height: 34.8 mm, number of positions: 2, color: black

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Warning cover

Warning cover - WST 2,5 - 3030941

<https://www.phoenixcontact.com/fr/produits/3030941>



Warning cover, 5-pos., for terminal width: 5.2 mm

---

## Group cover marker

Group cover marker - BST 2,5 - 3061282

<https://www.phoenixcontact.com/fr/produits/3061282>



Cover for actuation shaft, 5-pos., for spring-cage terminal blocks with width of 5.2 mm

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## DIN rail perforated

DIN rail perforated - NS 35/ 7,5 PERF 2000MM - 0801733

<https://www.phoenixcontact.com/fr/produits/0801733>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 UNPERF 2000MM - 0801681

<https://www.phoenixcontact.com/fr/produits/0801681>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## DIN rail perforated

DIN rail perforated - NS 35/ 7,5 WH PERF 2000MM - 1204119

<https://www.phoenixcontact.com/fr/produits/1204119>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - 1204122

<https://www.phoenixcontact.com/fr/produits/1204122>



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 AL UNPERF 2000MM - 0801704

<https://www.phoenixcontact.com/fr/produits/0801704>



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)

---

## DIN rail perforated

DIN rail perforated - NS 35/ 7,5 ZN PERF 2000MM - 1206421

<https://www.phoenixcontact.com/fr/produits/1206421>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>



## DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 ZN UNPERF 2000MM - 1206434

<https://www.phoenixcontact.com/fr/produits/1206434>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - 0801762

<https://www.phoenixcontact.com/fr/produits/0801762>



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>



## End cap

End cap - NS 35/ 7,5 CAP - 1206560

<https://www.phoenixcontact.com/fr/produits/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



---

## DIN rail perforated

DIN rail perforated - NS 35/15 PERF 2000MM - 1201730

<https://www.phoenixcontact.com/fr/produits/1201730>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>



## DIN rail, unperforated

DIN rail, unperforated - NS 35/15 UNPERF 2000MM - 1201714

<https://www.phoenixcontact.com/fr/produits/1201714>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

---

## DIN rail perforated

DIN rail perforated - NS 35/15 WH PERF 2000MM - 0806602

<https://www.phoenixcontact.com/fr/produits/0806602>



DIN rail perforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white, Pack of 25 (50 m)

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>



## DIN rail, unperforated

DIN rail, unperforated - NS 35/15 WH UNPERF 2000MM-VPE 10 - 1204135

<https://www.phoenixcontact.com/fr/produits/1204135>



DIN rail, unperforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/15 AL UNPERF 2000MM - 1201756

<https://www.phoenixcontact.com/fr/produits/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>



## DIN rail perforated

DIN rail perforated - NS 35/15 ZN PERF 2000MM - 1206599

<https://www.phoenixcontact.com/fr/produits/1206599>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/15 ZN UNPERF 2000MM - 1206586

<https://www.phoenixcontact.com/fr/produits/1206586>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>



## DIN rail, unperforated

DIN rail, unperforated - NS 35/15 CU UNPERF 2000MM-VPE 10 - 1201895

<https://www.phoenixcontact.com/fr/produits/1201895>



DIN rail, unperforated, similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

---

## End cap

End cap - NS 35/15 CAP - 1206573

<https://www.phoenixcontact.com/fr/produits/1206573>

DIN rail end piece, for DIN rail NS 35/15



# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## DIN rail, unperforated

DIN rail, unperforated - NS 35/15-2,3 UNPERF 2000MM-VPE 10 - 1201798

<https://www.phoenixcontact.com/fr/produits/1201798>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver, Pack of 10 (20 m)

---

## Zack Marker strip, flat

Zack Marker strip, flat - ZBF 5:UNBEDRUCKT - 0808642

<https://www.phoenixcontact.com/fr/produits/0808642>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.1 x 5.2 mm, Number of individual labels: 10

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Zack Marker strip, flat

Zack Marker strip, flat - ZBF 5 CUS - 0825025

<https://www.phoenixcontact.com/fr/produits/0825025>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

## Zack Marker strip, flat

Zack Marker strip, flat - ZBF 5,LGS:FORTL.ZAHLEN - 0808671

<https://www.phoenixcontact.com/fr/produits/0808671>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Zack Marker strip, flat

Zack Marker strip, flat - ZBF 5,QR:FORTL.ZAHLEN - 0808697

<https://www.phoenixcontact.com/fr/produits/0808697>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

---

## Zack Marker strip, flat

Zack Marker strip, flat - ZBF 5,LGS:GERADE ZAHLEN - 0810821

<https://www.phoenixcontact.com/fr/produits/0810821>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive even numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Zack Marker strip, flat

Zack Marker strip, flat - ZBF 5,LGS:UNGERADE ZAHLEN - 0810863

<https://www.phoenixcontact.com/fr/produits/0810863>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

---

## Marker for terminal blocks

Marker for terminal blocks - UC-TMF 5 - 0818153

<https://www.phoenixcontact.com/fr/produits/0818153>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Marker for terminal blocks

Marker for terminal blocks - UC-TMF 5 CUS - 0824638

<https://www.phoenixcontact.com/fr/produits/0824638>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96

---

## Marker for terminal blocks

Marker for terminal blocks - UCT-TMF 5 - 0828744

<https://www.phoenixcontact.com/fr/produits/0828744>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Marker for terminal blocks

Marker for terminal blocks - UCT-TMF 5 CUS - 0829658

<https://www.phoenixcontact.com/fr/produits/0829658>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72

---

## Test plugs

Test plugs - MPS-MT - 0201744

<https://www.phoenixcontact.com/fr/produits/0201744>



Test plugs, with solder connection up to 1 mm<sup>2</sup> conductor cross section, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>



## Insulating sleeve

Insulating sleeve - MPS-IH WH - 0201663

<https://www.phoenixcontact.com/fr/produits/0201663>

Insulating sleeve, color: white



---

## Insulating sleeve

Insulating sleeve - MPS-IH RD - 0201676

<https://www.phoenixcontact.com/fr/produits/0201676>

Insulating sleeve, color: red



# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Insulating sleeve

Insulating sleeve - MPS-IH BU - 0201689

<https://www.phoenixcontact.com/fr/produits/0201689>

Insulating sleeve, color: blue



---

## Insulating sleeve

Insulating sleeve - MPS-IH YE - 0201692

<https://www.phoenixcontact.com/fr/produits/0201692>

Insulating sleeve, color: yellow



# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Insulating sleeve

Insulating sleeve - MPS-IH GN - 0201702

<https://www.phoenixcontact.com/fr/produits/0201702>

Insulating sleeve, color: green



---

## Insulating sleeve

Insulating sleeve - MPS-IH GY - 0201728

<https://www.phoenixcontact.com/fr/produits/0201728>

Insulating sleeve, color: gray



# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>



## Insulating sleeve

Insulating sleeve - MPS-IH BK - 0201731

<https://www.phoenixcontact.com/fr/produits/0201731>

Insulating sleeve, color: black



---

## Test adapter

Test adapter - PAI-4-FIX-5/6 BU - 3035975

<https://www.phoenixcontact.com/fr/produits/3035975>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Test adapter

Test adapter - PAI-4-FIX-5/6 OG - 3035974

<https://www.phoenixcontact.com/fr/produits/3035974>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

## Test adapter

Test adapter - PAI-4-FIX-5/6 YE - 3035977

<https://www.phoenixcontact.com/fr/produits/3035977>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Test adapter

Test adapter - PAI-4-FIX-5/6 RD - 3035976

<https://www.phoenixcontact.com/fr/produits/3035976>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

## Test adapter

Test adapter - PAI-4-FIX-5/6 GN - 3035978

<https://www.phoenixcontact.com/fr/produits/3035978>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Test adapter

Test adapter - PAI-4-FIX-5/6 BK - 3035980

<https://www.phoenixcontact.com/fr/produits/3035980>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

## Test adapter

Test adapter - PAI-4-FIX-5/6 GY - 3035982

<https://www.phoenixcontact.com/fr/produits/3035982>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Test adapter

Test adapter - PAI-4-FIX-5/6 VT - 3035979

<https://www.phoenixcontact.com/fr/produits/3035979>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

## Test adapter

Test adapter - PAI-4-FIX-5/6 BN - 3035981

<https://www.phoenixcontact.com/fr/produits/3035981>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Test adapter

Test adapter - PAI-4-FIX-5/6 WH - 3035983

<https://www.phoenixcontact.com/fr/produits/3035983>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



---

## Test plugs

Test plugs - PS-5 - 3030983

<https://www.phoenixcontact.com/fr/produits/3030983>

Test plugs, Modular test plug, color: red



# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Spacer plate

Spacer plate - DP PS-5 - 3036725

<https://www.phoenixcontact.com/fr/produits/3036725>



Spacer plate, length: 22.4 mm, width: 5.2 mm, height: 29 mm, number of positions: 1, color: red

---

## Test plugs

Test plugs - PS-5/2,3MM RD - 3038723

<https://www.phoenixcontact.com/fr/produits/3038723>



Test plugs, color: red

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## End clamp

End clamp - CLIPFIX 35 - 3022218

<https://www.phoenixcontact.com/fr/produits/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

---

## End clamp

End clamp - CLIPFIX 35-5 - 3022276

<https://www.phoenixcontact.com/fr/produits/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486


<https://www.phoenixcontact.com/fr/produits/3061486>

## End clamp

End clamp - E/NS 35 N - 0800886

<https://www.phoenixcontact.com/fr/produits/0800886>

End clamp, width: 9.5 mm, color: gray



---

## Plug

Plug - SP 2,5/ 1 - 3040258

<https://www.phoenixcontact.com/fr/produits/3040258>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP 2,5/ 2 - 3040261

<https://www.phoenixcontact.com/fr/produits/3040261>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 2, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP 2,5/ 3 - 3040274

<https://www.phoenixcontact.com/fr/produits/3040274>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 3, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP 2,5/ 4 - 3040287

<https://www.phoenixcontact.com/fr/produits/3040287>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 4, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP 2,5/ 5 - 3040290

<https://www.phoenixcontact.com/fr/produits/3040290>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 5, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP 2,5/ 6 - 3040300

<https://www.phoenixcontact.com/fr/produits/3040300>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 6, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP 2,5/ 7 - 3040313

<https://www.phoenixcontact.com/fr/produits/3040313>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 7, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP 2,5/ 8 - 3040326

<https://www.phoenixcontact.com/fr/produits/3040326>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 8, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP 2,5/ 9 - 3040339

<https://www.phoenixcontact.com/fr/produits/3040339>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 9, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP 2,5/10 - 3040342

<https://www.phoenixcontact.com/fr/produits/3040342>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 10, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP 2,5/11 - 3040355

<https://www.phoenixcontact.com/fr/produits/3040355>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 11, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP 2,5/12 - 3040368

<https://www.phoenixcontact.com/fr/produits/3040368>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 12, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP 2,5/13 - 3040371

<https://www.phoenixcontact.com/fr/produits/3040371>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 13, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP 2,5/14 - 3040384

<https://www.phoenixcontact.com/fr/produits/3040384>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 14, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP 2,5/15 - 3040397

<https://www.phoenixcontact.com/fr/produits/3040397>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 15, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP 2,5/ 1 BU - 3040698

<https://www.phoenixcontact.com/fr/produits/3040698>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

---

## Plug

Plug - SP 2,5/ 1 GNYE - 3040708

<https://www.phoenixcontact.com/fr/produits/3040708>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPB 2,5/ 1 - 3040106

<https://www.phoenixcontact.com/fr/produits/3040106>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPB 2,5/ 2 - 3040119

<https://www.phoenixcontact.com/fr/produits/3040119>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 2, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPB 2,5/ 3 - 3040122

<https://www.phoenixcontact.com/fr/produits/3040122>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 3, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPB 2,5/ 4 - 3040135

<https://www.phoenixcontact.com/fr/produits/3040135>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 4, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPB 2,5/ 5 - 3040143

<https://www.phoenixcontact.com/fr/produits/3040143>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 5, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPB 2,5/ 6 - 3040151

<https://www.phoenixcontact.com/fr/produits/3040151>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 6, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPB 2,5/ 7 - 3040164

<https://www.phoenixcontact.com/fr/produits/3040164>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 7, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPB 2,5/ 8 - 3040177

<https://www.phoenixcontact.com/fr/produits/3040177>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 8, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPB 2,5/ 9 - 3040180

<https://www.phoenixcontact.com/fr/produits/3040180>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 9, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPB 2,5/10 - 3040193

<https://www.phoenixcontact.com/fr/produits/3040193>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 10, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPB 2,5/11 - 3040203

<https://www.phoenixcontact.com/fr/produits/3040203>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 11, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPB 2,5/12 - 3040216

<https://www.phoenixcontact.com/fr/produits/3040216>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 12, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPB 2,5/13 - 3040229

<https://www.phoenixcontact.com/fr/produits/3040229>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 13, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPB 2,5/14 - 3040232

<https://www.phoenixcontact.com/fr/produits/3040232>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 14, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPB 2,5/15 - 3040245

<https://www.phoenixcontact.com/fr/produits/3040245>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 15, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPB 2,5/ 1 BU - 3040724

<https://www.phoenixcontact.com/fr/produits/3040724>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPB 2,5/ 1 GNYE - 3040711

<https://www.phoenixcontact.com/fr/produits/3040711>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

---

## Plug

Plug - SPDB 2,5/ 1 - 3040407

<https://www.phoenixcontact.com/fr/produits/3040407>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPDB 2,5/ 2 - 3040410

<https://www.phoenixcontact.com/fr/produits/3040410>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 2, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPDB 2,5/ 3 - 3040423

<https://www.phoenixcontact.com/fr/produits/3040423>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 3, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPDB 2,5/ 4 - 3040436

<https://www.phoenixcontact.com/fr/produits/3040436>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 4, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPDB 2,5/ 5 - 3040449

<https://www.phoenixcontact.com/fr/produits/3040449>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 5, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPDB 2,5/ 6 - 3040452

<https://www.phoenixcontact.com/fr/produits/3040452>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 6, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPDB 2,5/ 7 - 3040465

<https://www.phoenixcontact.com/fr/produits/3040465>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 7, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPDB 2,5/ 8 - 3040478

<https://www.phoenixcontact.com/fr/produits/3040478>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 8, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPDB 2,5/ 9 - 3040481

<https://www.phoenixcontact.com/fr/produits/3040481>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 9, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPDB 2,5/10 - 3040494

<https://www.phoenixcontact.com/fr/produits/3040494>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 10, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

## Plug

Plug - SPDB 2,5/11 - 3040504

<https://www.phoenixcontact.com/fr/produits/3040504>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 11, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPDB 2,5/12 - 3040517

<https://www.phoenixcontact.com/fr/produits/3040517>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 12, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

## Plug

Plug - SPDB 2,5/13 - 3040520

<https://www.phoenixcontact.com/fr/produits/3040520>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 13, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPDB 2,5/14 - 3040533

<https://www.phoenixcontact.com/fr/produits/3040533>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 14, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

## Plug

Plug - SPDB 2,5/15 - 3040546

<https://www.phoenixcontact.com/fr/produits/3040546>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 15, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPDB 2,5/ 1 BU - 3040737

<https://www.phoenixcontact.com/fr/produits/3040737>




Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

---

## Plug

Plug - SPDB 2,5/ 1 GNYE - 3040740

<https://www.phoenixcontact.com/fr/produits/3040740>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP-H 2,5/ 1 - 3210619

<https://www.phoenixcontact.com/fr/produits/3210619>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP-H 2,5/ 2 - 3210622

<https://www.phoenixcontact.com/fr/produits/3210622>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 2, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP-H 2,5/ 3 - 3210635

<https://www.phoenixcontact.com/fr/produits/3210635>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 3, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP-H 2,5/ 4 - 3210648

<https://www.phoenixcontact.com/fr/produits/3210648>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 4, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP-H 2,5/ 5 - 3210651

<https://www.phoenixcontact.com/fr/produits/3210651>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 5, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP-H 2,5/ 6 - 3210664

<https://www.phoenixcontact.com/fr/produits/3210664>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 6, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP-H 2,5/ 7 - 3210677

<https://www.phoenixcontact.com/fr/produits/3210677>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 7, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP-H 2,5/ 8 - 3210680

<https://www.phoenixcontact.com/fr/produits/3210680>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 8, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP-H 2,5/ 9 - 3210693

<https://www.phoenixcontact.com/fr/produits/3210693>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 9, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP-H 2,5/10 - 3210703

<https://www.phoenixcontact.com/fr/produits/3210703>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 10, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP-H 2,5/11 - 3210716

<https://www.phoenixcontact.com/fr/produits/3210716>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 11, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP-H 2,5/12 - 3210729

<https://www.phoenixcontact.com/fr/produits/3210729>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 12, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP-H 2,5/13 - 3210732

<https://www.phoenixcontact.com/fr/produits/3210732>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 13, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP-H 2,5/14 - 3210745

<https://www.phoenixcontact.com/fr/produits/3210745>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 14, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP-H 2,5/15 - 3210758

<https://www.phoenixcontact.com/fr/produits/3210758>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 15, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP-H 2,5/ 1 BU - 3210761

<https://www.phoenixcontact.com/fr/produits/3210761>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP-H 2,5/ 1 GNYE - 3210774

<https://www.phoenixcontact.com/fr/produits/3210774>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

---

## Plug

Plug - SP-H 2,5/ 1-L - 3210787

<https://www.phoenixcontact.com/fr/produits/3210787>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP-H 2,5/ 1-L BU - 3210790

<https://www.phoenixcontact.com/fr/produits/3210790>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

---

## Plug

Plug - SP-H 2,5/ 1-L GNYE - 3210800

<https://www.phoenixcontact.com/fr/produits/3210800>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP-H 2,5/ 1-M - 3210813

<https://www.phoenixcontact.com/fr/produits/3210813>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SP-H 2,5/ 1-M BU - 3210826

<https://www.phoenixcontact.com/fr/produits/3210826>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP-H 2,5/ 1-M GNYE - 3210839

<https://www.phoenixcontact.com/fr/produits/3210839>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

---

## Plug

Plug - SP-H 2,5/ 1-R - 3210842

<https://www.phoenixcontact.com/fr/produits/3210842>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SP-H 2,5/ 1-R BU - 3210855

<https://www.phoenixcontact.com/fr/produits/3210855>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

---

## Plug

Plug - SP-H 2,5/ 1-R GNYE - 3210868

<https://www.phoenixcontact.com/fr/produits/3210868>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPV 2,5/ 1 - 3041710

<https://www.phoenixcontact.com/fr/produits/3041710>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPV 2,5/ 2 - 3041723

<https://www.phoenixcontact.com/fr/produits/3041723>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 2, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPV 2,5/ 3 - 3041736

<https://www.phoenixcontact.com/fr/produits/3041736>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 3, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPV 2,5/ 4 - 3041749

<https://www.phoenixcontact.com/fr/produits/3041749>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 4, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPV 2,5/ 5 - 3041752

<https://www.phoenixcontact.com/fr/produits/3041752>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 5, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

## Plug

Plug - SPV 2,5/ 6 - 3041765

<https://www.phoenixcontact.com/fr/produits/3041765>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 6, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPV 2,5/ 7 - 3041778

<https://www.phoenixcontact.com/fr/produits/3041778>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 7, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPV 2,5/ 8 - 3041781

<https://www.phoenixcontact.com/fr/produits/3041781>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 8, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPV 2,5/ 9 - 3041794

<https://www.phoenixcontact.com/fr/produits/3041794>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 9, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPV 2,5/10 - 3041804

<https://www.phoenixcontact.com/fr/produits/3041804>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 10, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPV 2,5/11 - 3041817

<https://www.phoenixcontact.com/fr/produits/3041817>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 11, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPV 2,5/12 - 3041820

<https://www.phoenixcontact.com/fr/produits/3041820>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 12, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPV 2,5/13 - 3041833

<https://www.phoenixcontact.com/fr/produits/3041833>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 13, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPV 2,5/14 - 3041846

<https://www.phoenixcontact.com/fr/produits/3041846>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 14, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPV 2,5/15 - 3041859

<https://www.phoenixcontact.com/fr/produits/3041859>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 15, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

## Plug

Plug - SPV 2,5/ 1 BU - 3061017

<https://www.phoenixcontact.com/fr/produits/3061017>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPV 2,5/ 1 GNYE - 3061020

<https://www.phoenixcontact.com/fr/produits/3061020>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

---

## Plug

Plug - SPV 2,5/ 1-L - 3041024

<https://www.phoenixcontact.com/fr/produits/3041024>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPV 2,5/ 1-L BU - 3041037

<https://www.phoenixcontact.com/fr/produits/3041037>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

---

## Plug

Plug - SPV 2,5/ 1-L GNYE - 3041040

<https://www.phoenixcontact.com/fr/produits/3041040>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPV 2,5/ 1-M - 3041053

<https://www.phoenixcontact.com/fr/produits/3041053>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - SPV 2,5/ 1-M BU - 3041066

<https://www.phoenixcontact.com/fr/produits/3041066>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPV 2,5/ 1-M GNYE - 3041079

<https://www.phoenixcontact.com/fr/produits/3041079>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, color: green-yellow

---

## Plug

Plug - SPV 2,5/ 1-R - 3041082

<https://www.phoenixcontact.com/fr/produits/3041082>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - SPV 2,5/ 1-R BU - 3041095

<https://www.phoenixcontact.com/fr/produits/3041095>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: blue

---

## Plug

Plug - SPV 2,5/ 1-R GNYE - 3041105

<https://www.phoenixcontact.com/fr/produits/3041105>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.08 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: green-yellow

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - PP-H 2,5/ 1 - 3209866

<https://www.phoenixcontact.com/fr/produits/3209866>



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, 1 level, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, mounting type: Plug-in mounting, color: gray

---

## Plug

Plug - PP-H 2,5/ 2 - 3209879

<https://www.phoenixcontact.com/fr/produits/3209879>



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, 1 level, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, mounting type: Plug-in mounting, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - PP-H 2,5/ 3 - 3209882

<https://www.phoenixcontact.com/fr/produits/3209882>



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, 1 level, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - PP-H 2,5/ 4 - 3209895

<https://www.phoenixcontact.com/fr/produits/3209895>



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, 1 level, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - PP-H 2,5/ 5 - 3209905

<https://www.phoenixcontact.com/fr/produits/3209905>



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, 1 level, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, mounting type: Plug-in mounting, color: gray

---

## Plug

Plug - PP-H 2,5/ 6 - 3209918

<https://www.phoenixcontact.com/fr/produits/3209918>



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, 1 level, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, mounting type: Plug-in mounting, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - PP-H 2,5/ 7 - 3209921

<https://www.phoenixcontact.com/fr/produits/3209921>



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, 1 level, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - PP-H 2,5/ 8 - 3209934

<https://www.phoenixcontact.com/fr/produits/3209934>



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, 1 level, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, mounting type: Plug-in mounting, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - PP-H 2,5/ 9 - 3209947

<https://www.phoenixcontact.com/fr/produits/3209947>



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, 1 level, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - PP-H 2,5/10 - 3209950

<https://www.phoenixcontact.com/fr/produits/3209950>



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, 1 level, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - PP-H 2,5/11 - 3209963

<https://www.phoenixcontact.com/fr/produits/3209963>



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, 1 level, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - PP-H 2,5/12 - 3209976

<https://www.phoenixcontact.com/fr/produits/3209976>



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, 1 level, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - PP-H 2,5/13 - 3209989

<https://www.phoenixcontact.com/fr/produits/3209989>



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, 1 level, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - PP-H 2,5/14 - 3209992

<https://www.phoenixcontact.com/fr/produits/3209992>



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, 1 level, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P

3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - PP-H 2,5/15 - 3210004

<https://www.phoenixcontact.com/fr/produits/3210004>



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, 1 level, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, color: gray

---

## Plug

Plug - PP-H 2,5/1-L - 3210062

<https://www.phoenixcontact.com/fr/produits/3210062>



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, 1 level, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, color: gray

# Double-level terminal block - STTB 2,5/4P



3061486

<https://www.phoenixcontact.com/fr/produits/3061486>

## Plug

Plug - PP-H 2,5/1-M - 3210091

<https://www.phoenixcontact.com/fr/produits/3210091>



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, 1 level, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, color: gray

## Plug

Plug - PP-H 2,5/1-R - 3210127

<https://www.phoenixcontact.com/fr/produits/3210127>



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, 1 level, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, color: gray

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT SAS  
52 Boulevard de Beaubourg Emerainville  
77436 Marne La Vallée Cedex 2 France  
+33 (0) 1 60 17 98 98  
[documentation@phoenixcontact.fr](mailto:documentation@phoenixcontact.fr)