

Quick exhaust valve

- Qn 1►2 = 1000-3500 l/min

- Qn 2►3 = 2050-7000 l/min

- Internal thread / Internal thread



Version

Working pressure min./max.

Ambient temperature min./max.

Medium temperature min./max.

Medium

Weight

Poppet valve


0,5 ... 10 bar

0 ... 80 °C

0 ... 80 °C

Compressed air

See table below

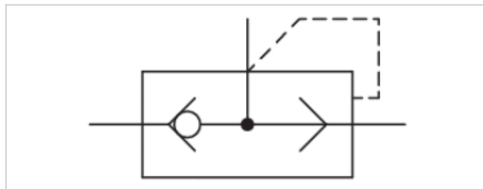

Technical data

Part No.	Port 1	Type	Port 2	Type	Port 3 (Exhaust)	Type
		Port 1		Port 2		Port 3 (Exhaust)
0821002003	G 1/4	Internal thread	G 1/4	Internal thread	G 3/8	Internal thread
0821002004	G 3/8	Internal thread	G 3/8	Internal thread	G 3/8	Internal thread
0821002002	G 1/2	Internal thread	G 1/2	Internal thread	G 3/4	Internal thread

Part No.	Flow rate value	Flow rate value	Weight
	Qn 1►2	Qn 2►3	
0821002003	1000 l/min	2050 l/min	0,11 kg
0821002004	2050 l/min	2050 l/min	0,12 kg
0821002002	3500 l/min	7000 l/min	0,3 kg


Nominal flow Qn at 6 bar and $\Delta p = 1$ bar

Technical information

Material	
Housing	Aluminum
Seals	Acrylonitrile butadiene rubber

Dimensions

Dimensions

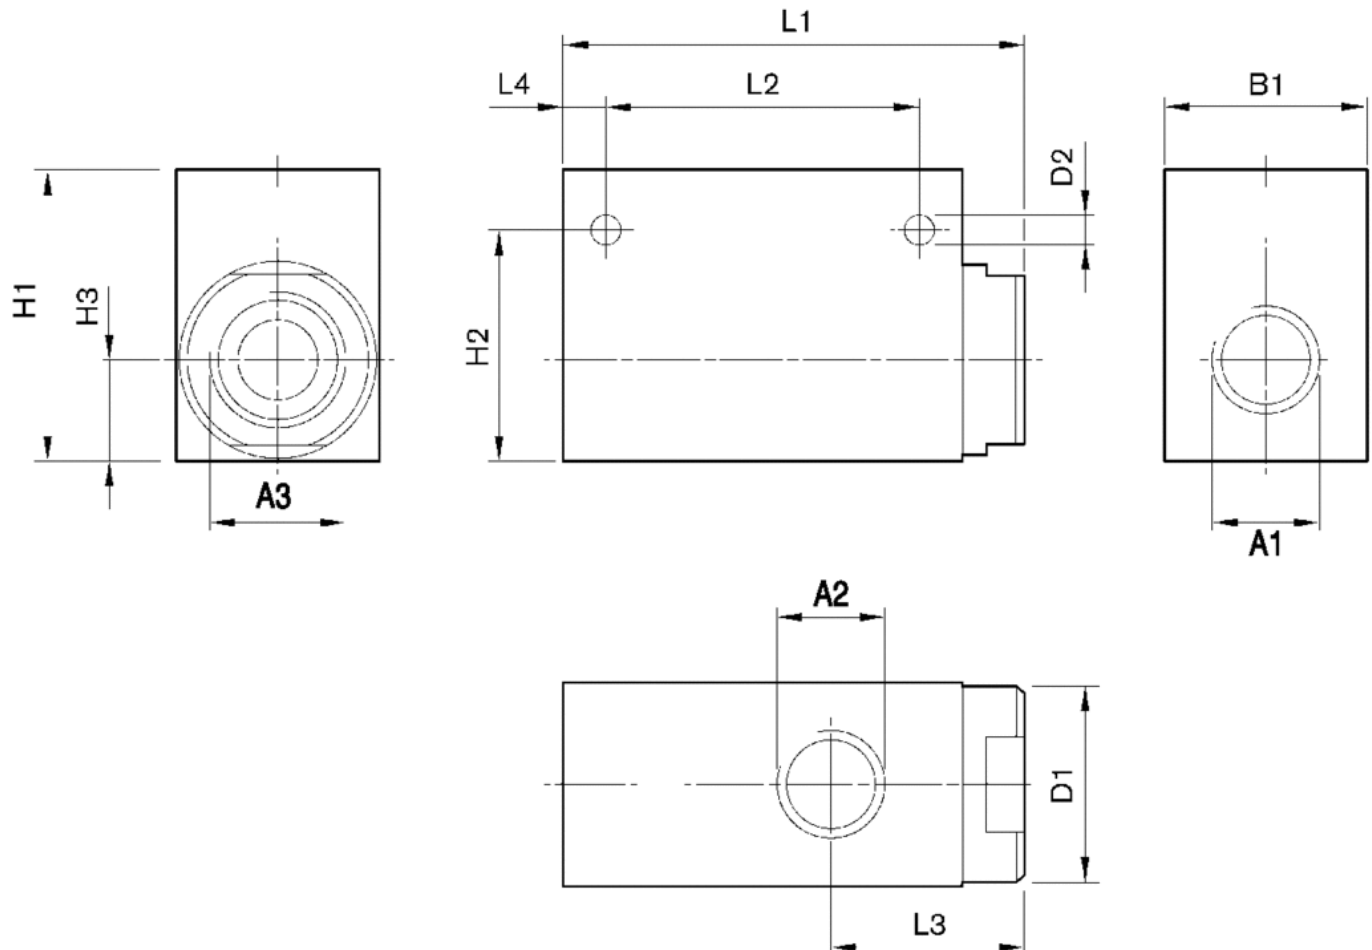

Dimensions

Part No.	A1	A2	A3	B1	D1	D2	H1	H2	H3	L1	L2	L3	L4
0821002003	G 1/4	G 1/4	G 3/8	25	25	5.5	36	30.2	13.2	62	38	26	8.5
0821002004	G 3/8	G 3/8	G 3/8	25	25	5.5	42	30.2	13.2	62	38	26	8.5
0821002002	G 1/2	G 1/2	G 3/4	44	40	6	55	43	21	78.5	50	34.5	9