

Data sheet

Adhesive sockets, T-piece, reduced, PVC-U, 110x50x110mm

Item number:

PVCT 11050110



Example illustration

Item description

Fitting of PVC-U (EN 1452-3)**Materials:**

PVC-U

Temperature range:

0°C to +60°C

Operating pressure:

max. 16 bar

Properties:

Abrasion resistant, non toxic, corrosion free, ideal for above ground and underground installations.

Media:

Water, many inorganic chemicals, many acid, alkaline and salt solutions. Not resistant against aromatic and chlorinated hydrocarbons. Never use for compressed air or other gases under pressure!

Warning:

Not suitable for compressed air or other gases under pressure!


Properties

Internal Ø d [mm]	110
Internal Ø d1 [mm]	50
External Ø D [mm]	129
Length L [mm]	118
Length L1 [mm]	88


Z [mm]	57
---------------	----

Further information:

Weight	1,2 kg / pcs
GTIN	4050571559793
Customs duty number	39174000
RoHS compliant	Yes

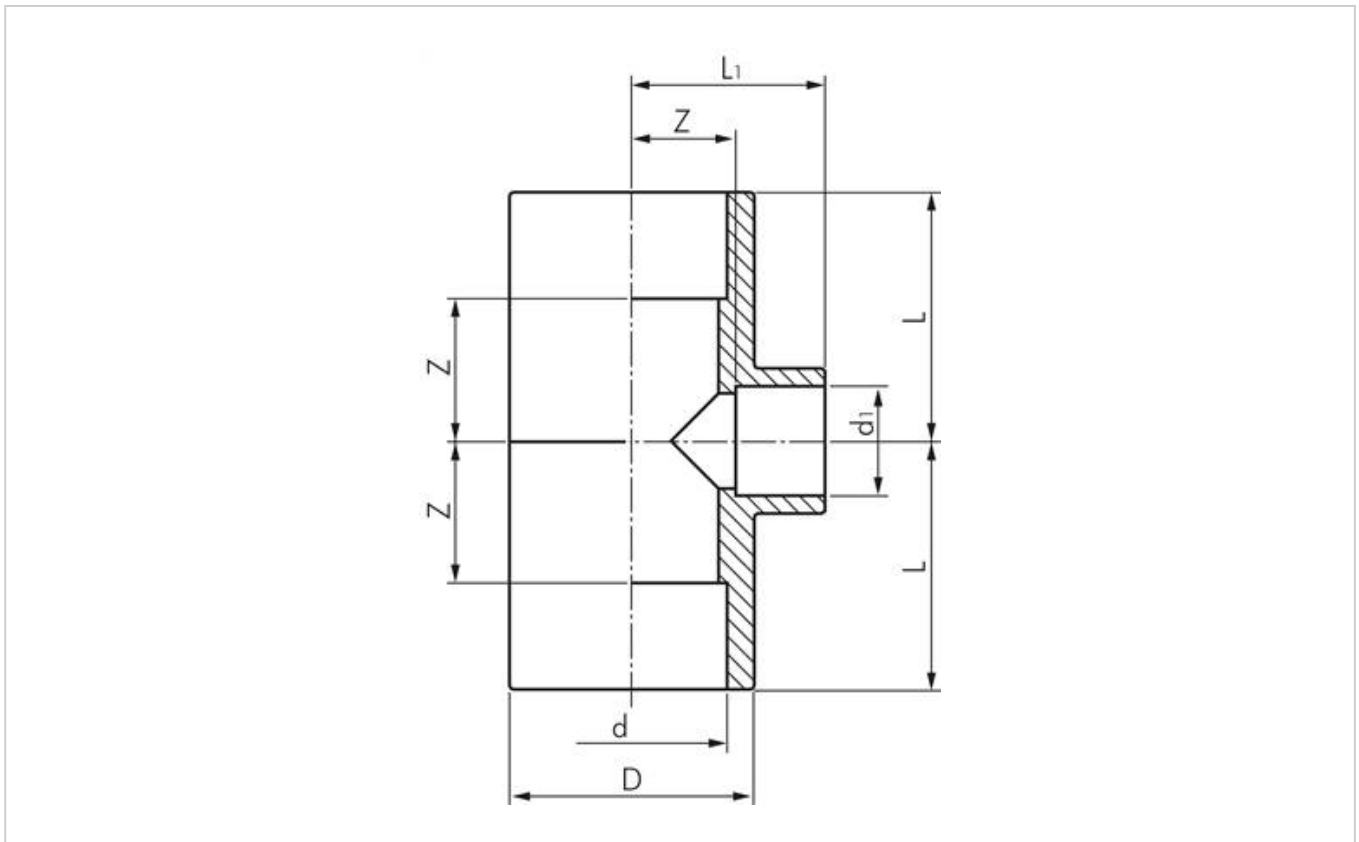Drawing:

Drawing

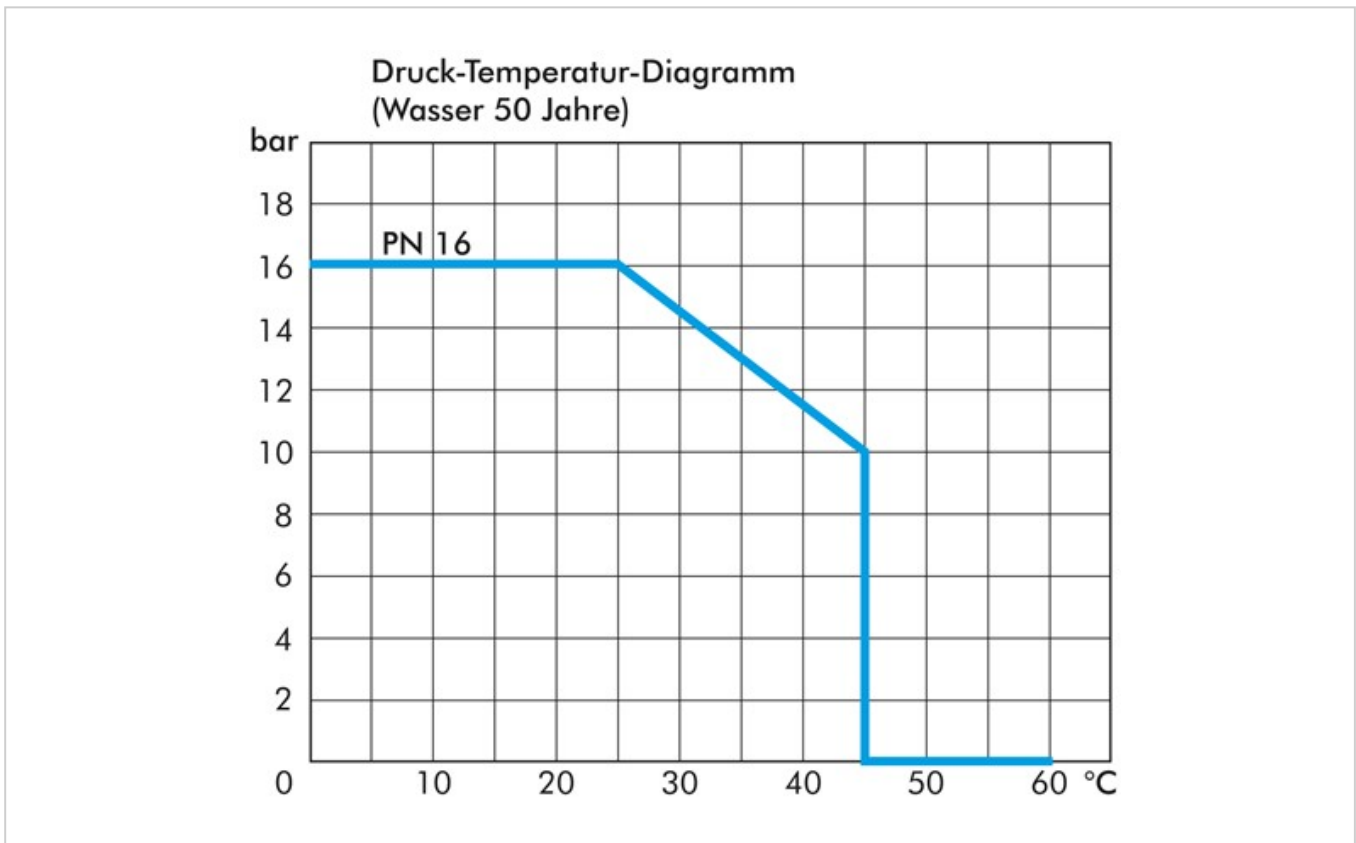

Drawing: Pressure-temperature diagram

More information on this item and the process for ordering it can be found in our online shop
<https://www.landefeld.com> under item number **PVCT 11050110**.

Landefeld Druckluft und Hydraulik GmbH · Konrad-Zuse-Straße 1 · 34123 Kassel · Germany

All data are to be understood as non-binding reference values! We do not assume liability for any data selection not confirmed in writing. Unless otherwise specified, pressure values refer to liquids from Group II at +20°C.

As of: 10.07.2023