

19-Inch Rack Mount Kit for PanelView 1400e Touch Screen Terminals (Cat. No. 2711-NR4) (For Terminal Cat. No. 2711E-T14C6, 2711E-T14C7)


Description

Use the Rack Mount Kit to mount 1400e PanelView Touch Screen terminals in a standard 19-inch EIA rack. The Rack Mount Kit consists of a rack adapter and mounting hardware.

Specifications and Dimensions

The rack adapter is designed for a panel size of 8U, according to EIA specification RS-310-C.

Figure 1
19-Inch Rack Mount Assembly for Touch Screen Terminals

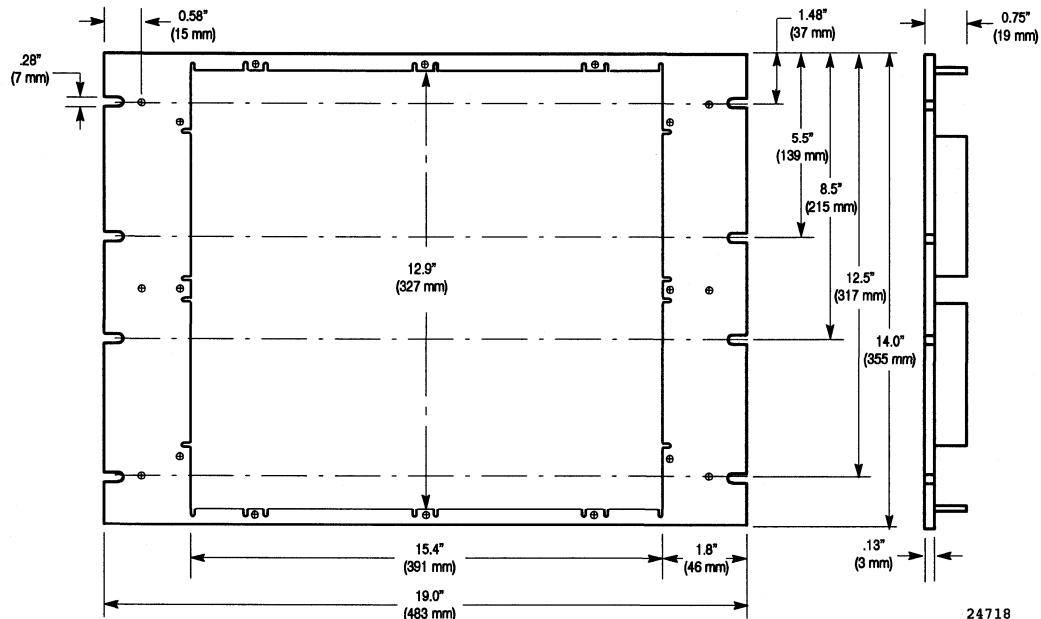

24718

Installation Data

19-Inch Rack Mount Kit for PanelView Touch Screen Terminals

Mounting Your PanelView Terminals in a 19-Inch Rack

To mount your PanelView terminal in a 19-inch rack:

Fasten the rack adapter to the terminal.

1. Slide the rack adapter over the terminal chassis from the back.
2. Align the holes in the rack adapter with the studs on the terminal chassis.
3. Push the rack adapter flush with the gasket material.
4. There are 12 studs on the back of the terminal chassis. Fasten the mounting nuts over these studs to compress the gasket and attach the terminal to the rack adapter.

The tightening torque should not exceed 10 inch-pounds. The gasket's built-in spacers will not allow it to be over-compressed. You will notice that the torque increases significantly when you reach the correct compression.

Attach the terminal and rack adapter to the rack.

1. Place the terminal with the rack adapter into the 19-inch rack. Align the holes on the rack adapter with the holes in the rack where you want to position the terminal.
2. Eight mounting screws, nut clips, and bezel washers come with the rack mount adapter kit. To fasten the terminal to the 19-inch rack:
 - a Slide the clips onto the rack.
 - b Thread the bezel washer onto the mounting screw and screw the rack adapter to the rack.
 - c Tighten to a torque not exceeding 10 inch-pounds.



Allen-Bradley, a Rockwell Automation Business, has been helping its customers improve productivity and quality for more than 90 years. We design, manufacture and support a broad range of automation products worldwide. They include logic processors, power and motion control devices, operator interfaces, sensors and a variety of software. Rockwell is one of the world's leading technology companies.



Worldwide representation.

Argentina • Australia • Austria • Bahrain • Belgium • Brazil • Bulgaria • Canada • Chile • China, PRC • Colombia • Costa Rica • Croatia • Cyprus • Czech Republic • Denmark • Ecuador • Egypt • El Salvador • Finland • France • Germany • Greece • Guatemala • Honduras • Hong Kong • Hungary • Iceland • India • Indonesia • Ireland • Israel • Italy • Jamaica • Japan • Jordan • Korea • Kuwait • Lebanon • Malaysia • Mexico • Netherlands • New Zealand • Norway • Pakistan • Peru • Philippines • Poland • Portugal • Puerto Rico • Qatar • Romania • Russia-CIS • Saudi Arabia • Singapore • Slovakia • Slovenia • South Africa, Republic • Spain • Sweden • Switzerland • Taiwan • Thailand • Turkey • United Arab Emirates • United Kingdom • United States • Uruguay • Venezuela • Yugoslavia

Allen-Bradley Headquarters, 1201 South Second Street, Milwaukee, WI 53204 USA, Tel: (1) 414 382-2000 Fax: (1) 414 382-4444