

**Parker Rectus 26KE Safety quick release coupler** made of nickel plated brass with plastic safety cup **Euro profile**

Profile is 100% exchangeable with: CJEN-320, JWL-520, PLC-AC71 en Rectus 25 KA + 26KA & Rino-26

Material housing, valve and seal ring in nickel plated brass, safety cup blue plastic

Spring in stainless steel AISI-301

Balls in stainless steel AISI-420

Seals Perbunaan, thread BSP & BSPT

Plugs: hardened steel or brass (see above)

Application: compressors, automotive, machinery building and air tools.

Flow: 1400 L/min Valve drain: 7,2 mm Max temp: -20 - +60C Max pressure: 8 bar

**Safety quick release coupler 26KE with BSPT male thread.**

Number	Size	Type
609095	1/4-male	26KEAW13MPN
609096	3/8-male	26KEAW17MPN
609097	1/2-male	26KEAW21MPN



**Safety quick release coupler 26KE with BSPT female thread.**

Number	Size	Type
609098	1/4-female	26KEIW13MPN
609099	3/8-female	26KEIW17MPN
609100	1/2-female	26KEIW21MPN



**Safety quick release coupler 26KE with hose connection.**

Number	Size	Type
609101	6 mm	26KETF06MPN
609102	8 mm	26KETF08MPN
609103	9 mm	26KETF09MPN
609104	10 mm	26KETF10MPN
609105	13 mm	26KETF13MPN



**Parker Rectus 25KA Ultra Flow quick release coupler** made of nickel plated brass HEAVY DUTY type **Euro profile**

Profile is 100% exchangeable with: CJEN-320, JWL-520, PLC-AC71 en Rectus 26KA & Rino-26

Material housing, cup, valve and sealing ring in nickel plated brass.

Spring in stainless steel AISI-301

Balls in stainless steel AISI-420

Seals Perbunaan, thread BSP & BSPT

Plugs: hardened steel or brass (see above)

Application: compressors, automotive, machinery building and air tools.

Flow: 800 L/min Valve drain: 7,4 mm Max temp: -20 - +100C Max pressure: 35 bar


**Quick release coupler 25KA HD with BSPT male thread.**

Number	Size	Type
609075	1/4-male	25KAAK13MPN
609076	3/8-male	25KAAK17MPN
609077	1/2-male	25KAAK21MPN



**Quick release coupler 25KA HD with BSPT female thread.**

Number	Size	Type
609078	1/4-female	25KAIW13MPN
609079	3/8-female	25KAIW17MPN
609080	1/2-female	25KAIW21MPN

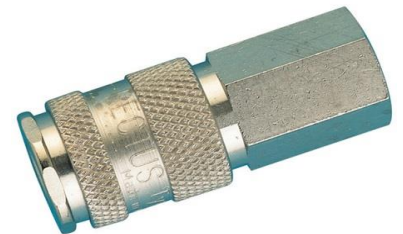

**Quick release coupler 25KA HD with hose connection.**

Number	Size	Type
609081	6 mm	25KATF06MPN
609082	8 mm	25KATF08MPN
609083	9 mm	25KATF09MPN
609084	10 mm	25KATF10MPN
609085	13 mm	25KATF13MPN

