


IZ5036



Inductive sensor

IZB30,8-BPKG/V2A/PH

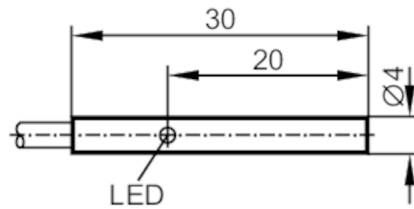

Product characteristics	
Electrical design	PNP
Output function	normally open
Sensing range [mm]	0.8
Housing	tubular
Dimensions [mm]	Ø 4 / L = 30
Electrical data	
Operating voltage [V]	10...36 DC
Current consumption [mA]	15; (24 V)
Protection class	III
Reverse polarity protection	yes
Outputs	
Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	100
Switching frequency DC [Hz]	2000
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes
Monitoring range	
Sensing range [mm]	0.8
Real sensing range Sr [mm]	0.8 ± 10 %
Operating distance [mm]	0...0.65
Accuracy / deviations	
Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminum: 0.4 / copper: 0.3
Hysteresis [% of Sr]	1...15
Switch-point drift [% of Sr]	-10...10
Operating conditions	
Ambient temperature [°C]	-25...70
Protection	IP 65

IZ5036



Inductive sensor

IZB30,8-BPKG/V2A/PH

Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	3 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	3 V
	EN 55011	class B
MTTF	[years]	2053

Mechanical data		
Weight	[g]	41.2
Housing		tubular
Mounting		flush mountable
Dimensions	[mm]	Ø 4 / L = 30
Material		stainless steel (1.4305 / 303); sensing face: POM


Displays / operating elements		
Display	Switching status	1 x LED, yellow

Accessories		
Items supplied		Mounting clamp: 1

Remarks		
Pack quantity		1 pcs.

Electrical connection		
Cable: 2 m, PUR / PVC; 3 x 0.14 mm ²		

Connection

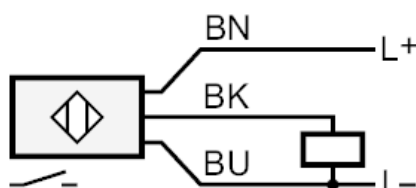

Core colors :
BK = black
BN = brown
BU = blue